



11620.01

Micky


Micky LED adjustable spotlight white

Electronic driver and adaptor for electrified Novatrack included.
Item complete of both 24° and 60° reflectors interchangeable.
Satin diffuser IP40.

01 white

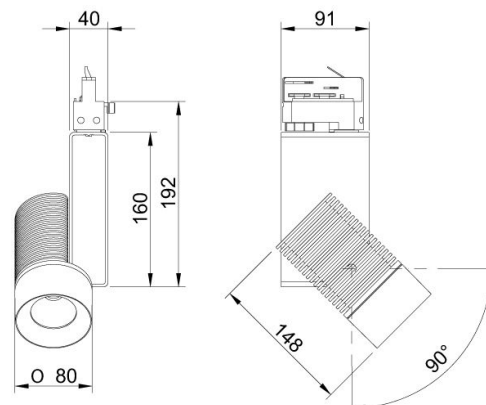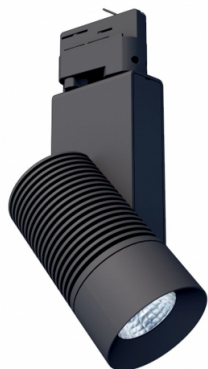

D: 80 mm
L: 148 mm



Installations

Fixture for track mounting on electrified Novatrack.

Wiring

Integrated electronic driver for LED.

Supply voltage: 220-240V 50/60Hz

Total power: 29W

Power factor: 0.9

Photobiological Risk

Certified device in RISK GROUP 1 (Low Risk)-The lamp does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010.

Compliance

In accordance with standard: CEI EN 60598-1:2008 + A11:2009, IEC 60598-2-2.

Sources

Color: white

Power: 26W

Color temperature: 3000K

CRI: >80

Nominal flux (Tc=25°C): 3020 lm

Lamp included

Photometric data

Luminous flux (Ta=25°C): 2142 lm

Beamwidth: 24°/60

