

EL5510NELED


Noor

Noor LED


Electronic driver included.

Kit for pole installation to be ordered separately.

■ NE black ■ L specular aluminium

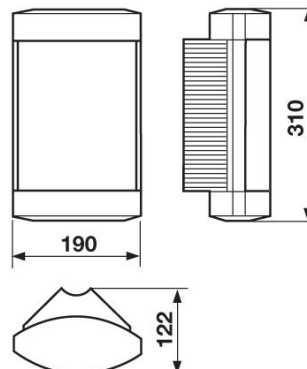

H: 122 mm
L: 310 mm
L1: 190 mm



Installations

IP65 fixture, for ceiling or wall surface installation, or for "edge" installation, 45° tilted, or for installation on the top of cylindrical pole Ø= 60 mm in single or double configuration.

Material

Base and closing heads made of polypropylene diffuser made of opal PMMA.

Diffuser made of opal methacrylate.

Wiring

Integrated electronic driver for LED.

Supply voltage: 220-240V 50/60Hz
drive current: 250mA

Total power: 15W

Power factor: 0.9


Photobiological Risk

Certified device in RISK GROUP 1 (Low Risk)-The lamp does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010.

Compliance

In accordance with standard: CEI EN 60598-1:2008 + A11:2009, IEC 60598-2-1.

Sources



Type: PCB LED

Color: white

Power: 12W

Color temperature: 4000 K

CRI: >80

Nominal flux (Tc=25°C): 1920 lm

Lifespan (Ta=25°C): 50000 L80

Lamp included

Photometric data

Luminous flux (Ta=25°C): 1035 lm

Beamwidth: 120°

EL5510NELED

Noor

Noor LED

Accessories



A550NE

Support for pole mounting



A551NE

Bracket for pole mounting



A560NE

Base for pole mounting



A580NE

Fibreglass cylindrical pole
Ø60 mm to fix in the ground.
H 1200mm



A581NE

Fibreglass cylindrical pole Ø
60mm to fix in the ground.
H 1800mm