

EL5610NELED


Joy

Joy LED


Electronic driver included.

Kit for pole installation to be ordered separately.

■ NE black

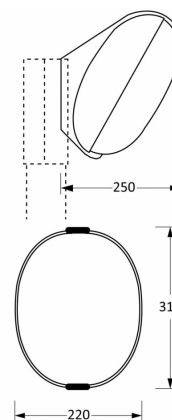

A: 250 mm
B: 220 mm
L: 310 mm



Installations

IP65 fixture, for wall surface installation, 45° tilted, or for installation on the top of cylindrical pole Ø=60mm in single or double configuration.

Material

Body and clips for locking the screen made of polypropylene; diffuser made of opal PMMA.

Reflector in white thermosetting material.

Diffuser fixed on the body with 2 hooks.

Wiring

Integrated electronic driver.

Rigid cable H05V2-U section 0,75 mm² (CEI 20-20).

Socket terminal 2P (section max 2,5mm²).

Supply voltage: 220-240V 50/60Hz

Total power: 21W

Power factor: 0.9


Photobiological Risk

Certified device in RISK GROUP 1 (Low Risk)-The lamp does not pose a hazard due to normal behavioral limitations on exposure - in accordance with CEI EN 62471:2010.

Compliance

In accordance with standard: CEI EN 60598-1:2008 + A11:2009, IEC 60598-2-1.

Sources



Type: PCB LED

Color: white

Power: 18W

Color temperature: 4000 K

CRI: >80

Nominal flux (Tc=25°C): 2400 lm

Lifespan (Ta=25°C): 50000h L80

Lamp included

Photometric data

Luminous flux (Ta=25°C): 1548 lm

Beamwidth: 120°

EL5610NELED

Joy

Joy LED

Accessories



A560NE
Base for pole
mounting



A560GR
Base for pole
mounting



A580NE
Fibreglass
cylindrical pole
Ø60 mm to fix in
the ground.
H 1200mm



A581NE
Fibreglass
cylindrical pole Ø
60mm to fix in
the ground.
H 1800mm