

# HIDE

design Lucitalia





Hide è la linea di apparecchi da incasso a soffitto per l'illuminazione di spazi commerciali e residenziali capace di integrarsi perfettamente al contesto architettonico, scomparendo nella struttura stessa. La sua profondità di incasso garantisce l'assoluto comfort visivo, evitando il rischio di abbagliamento e mediante un sistema telescopico, consente inoltre di regolare la distanza interna dell'ottica dal corpo stesso. Hide è disponibile in versione tonda e quadra, in due dimensioni e nelle finiture gold, white, black.

*Hide is a recessed line of fixtures designed for light commercial and residential spaces. The body is designed to deliver a high level of glare-free visual comfort. Distance of the optic can be adjusted and set by using the integrated telescopic system. Hide is available in round or square without frame, in two dimensions and multiple finishes.*



# HIDE

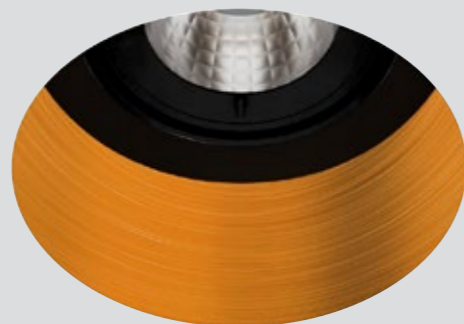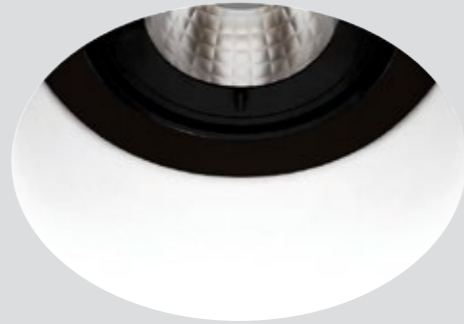

# HIDE 1R RD

IP40 - Classe I - CE / F



|  | 3000K   | 4000K   |
|--|---|---|
|  | <b>26201.--.31</b><br><b>26201.--.31.A</b> 1-10V<br><b>26201.--.31.D</b> DALI | <b>26201.--.41</b><br><b>26201.--.41.A</b> 1-10V<br><b>26201.--.41.D</b> DALI |

10W LED 1550 lm CRI > 85  
40° ^ adjustable  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*

|  |   |
|--|---|
|  | <b>26203.--</b><br><br>HAL / RETROFIT LED GU10<br>12°/36°/60° ^<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |
|--|---|

Colore standard 1 settimana  
*Standard color 1 week*

- **.01** Bianco  
White (matt)
- **.22** Nero  
Black (matt)

Finitura speciale su richiesta 4/6 settimane  
*Upon request finish 4/6 weeks*

- **.56** Oro spazzolato  
Brushed gold


# HIDE 2R RD



# HIDE 2R RD

IP40 - Classe I - CE / F



|   | 3000K   | 4000K   |
|---|---|---|
|  | <b>26213.--.31</b><br><b>26213.--.31.A</b> 1-10V<br><b>26213.--.31.D</b> DALI | <b>26213.--.41</b><br><b>26213.--.41.A</b> 1-10V<br><b>26213.--.41.D</b> DALI |

18W LED 1500 lm CRI > 85  
55° ^ adjustable  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*



|   | 3000K   | 4000K   |
|---|---|---|
|  | <b>26211.--.31</b><br><b>26211.--.31.A</b> 1-10V<br><b>26211.--.31.D</b> DALI | <b>26211.--.41</b><br><b>26211.--.41.A</b> 1-10V<br><b>26211.--.41.D</b> DALI |

26W LED 3430 lm CRI > 85  
55° ^ adjustable  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*


|   | 3000K   | 4000K   |
|---|---|---|
|  | <b>26214.--.31</b><br><b>26214.--.31.A</b> 1-10V<br><b>26214.--.31.D</b> DALI | <b>26214.--.41</b><br><b>26214.--.41.A</b> 1-10V<br><b>26214.--.41.D</b> DALI |

32W LED 4920 lm CRI > 85  
55° ^ adjustable  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*

Colore standard 1 settimana  
*Standard color 1 week*

-  **.01** Bianco  
*White (matt)*
-  **.22** Nero  
*Black (matt)*

Finitura speciale su richiesta 4/6 settimane  
*Upon request finish 4/6 weeks*

-  **.56** Oro spazzolato  
*Brushed gold*

# HIDE 1R SQ

IP40 - Classe I - CE / F



|  | 3000K  | 4000K   |
|--|--|---|
|  | <b>26231---.31</b><br><b>26231---.31.A</b> 1-10V<br><b>26231---.31.D</b> DALI  | <b>26231---.41</b><br><b>26231---.41.A</b> 1-10V<br><b>26231---.41.D</b> DALI |
|  | 10W LED 1550 lm CRI > 85<br>40° ^ adjustable<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |   |

| <b>26233.--</b> |  |
|-----------------|--|
|                 | HAL / RETROFIT LED GU10<br>12°/36°/60° ^<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |

Colore standard 1 settimana  
*Standard color 1 week*

- .01** Bianco  
*White (matt)*
- .22** Nero  
*Black (matt)*

Finitura speciale su richiesta 4/6 settimane  
*Upon request finish 4/6 weeks*

- .56** Oro spazzolato  
*Brushed gold*

# HIDE 2R SQ

IP40 - Classe I - CE / F



|  | 3000K  | 4000K   |
|--|--|---|
|  | <b>26217---.31</b><br><b>26217---.31.A</b> 1-10V<br><b>26217---.31.D</b> DALI  | <b>26217---.41</b><br><b>26217---.41.A</b> 1-10V<br><b>26217---.41.D</b> DALI |
|  | 18W LED 1500 lm CRI > 85<br>55° ^ adjustable<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |   |

| <b>26215.--.31</b> |  | <b>26215.--.41</b>                                      |  |
|--------------------|--|---|--|
|                    | <b>26215.--.31.A</b> 1-10V<br><b>26215.--.31.D</b> DALI  | <b>26215.--.41.A</b> 1-10V<br><b>26215.--.41.D</b> DALI |  |
|                    | 26W LED 3430 lm CRI > 85<br>55° ^ adjustable<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |   |  |

| <b>26218.--.31</b> |  | <b>26218.--.41</b>                                      |  |
|--------------------|--|---|--|
|                    | <b>26218.--.31.A</b> 1-10V<br><b>26218.--.31.D</b> DALI  | <b>26218.--.41.A</b> 1-10V<br><b>26218.--.41.D</b> DALI |  |
|                    | 32W LED 4920 lm CRI > 85<br>55° ^ adjustable<br>220÷240V 50/60 Hz<br>alimentatore elettronico incluso<br><i>electronic driver included</i> |   |  |

Colore standard 1 settimana  
*Standard color 1 week*

- .01** Bianco  
*White (matt)*
- .22** Nero  
*Black (matt)*

Finitura speciale su richiesta 4/6 settimane  
*Upon request finish 4/6 weeks*

- .56** Oro spazzolato  
*Brushed gold*