


Art. F.6845

miniMOK Applique LED 4.8W (C0-C90 20°) 220-240V 50/60Hz

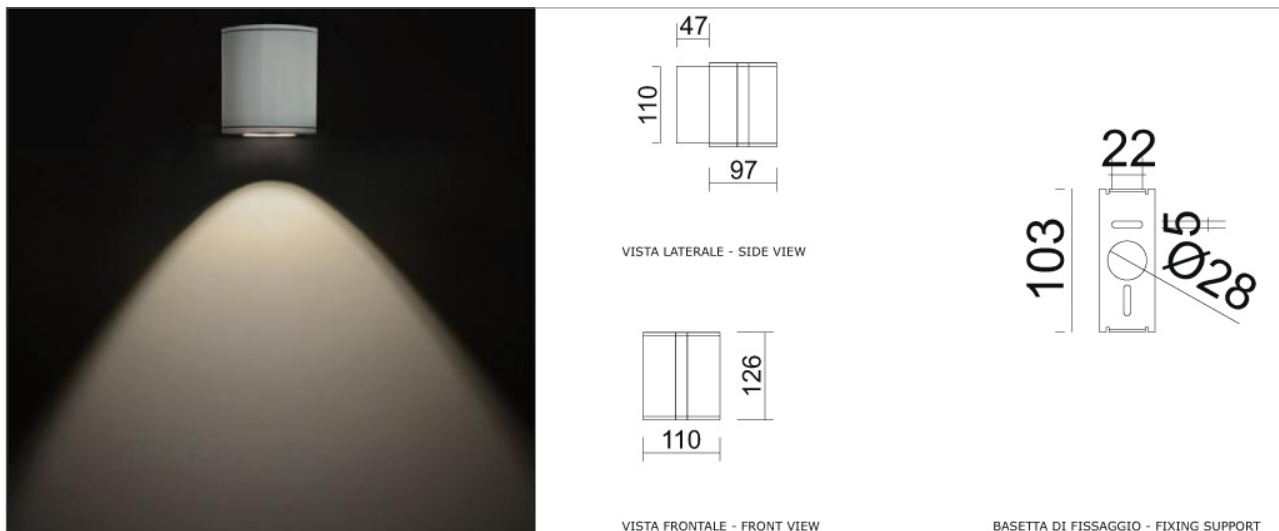

SPECIFICATION SHEET

Housing:

Extruded aluminium body 6060T5, Die-cast aluminium ring with high oxidation resistance ENAB 44300, Fixing base in aluminium.

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Wiring:

Brass cable blocker IP68 of nickel plated M12 for cable @3-7mm.

Installation:

Applique.

Dimensions:

Fixing base height 110mm width 49mm depth 47mm, body 110X97mm height 121mm.

Weight:

0.85 Kg

Color:

.1 anthracite, .2 white, .4 grey aluminium, .8 corten

Option:

LED .28 3000°K. .29 6000°K. .31 beam 10° .32 beam 40°

SOURCE DESCRIPTION

Color Temperature:

4000°K

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 398 lm. Total assorbed power 4,64w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

European Certification:

CE

Protection Class:

IP65-IK08

Insulation Class:

Class I

Energy Efficiency:

