



# POINT AS

design Lucitalia

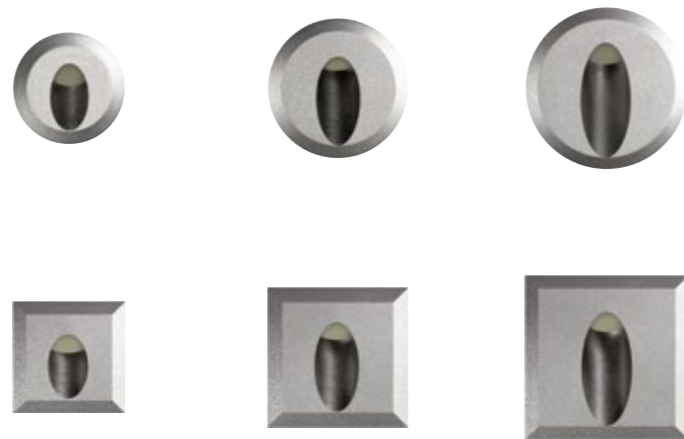

Apparecchio da incasso a parete ad emissione di luce asimmetrica. Point con le sue varie finiture diventa un segna passo ideale per l'illuminazione di scale, corridoi e ambienti di passaggio. Grazie al suo indice di protezione IP 65, risulta inoltre particolarmente indicato per luoghi dove si presenta necessaria un'elevata protezione contro umidità e acqua.

*Recessed wall lamp with asymmetric light distribution. Ideal for lighting stairs, passageways and hallways. Body in cast aluminum finished in power coat paint with under layer protection which guarantees protection over time. IP 65 rating makes it ideal for installation in areas where protection against elevated humidity and water are necessary.*

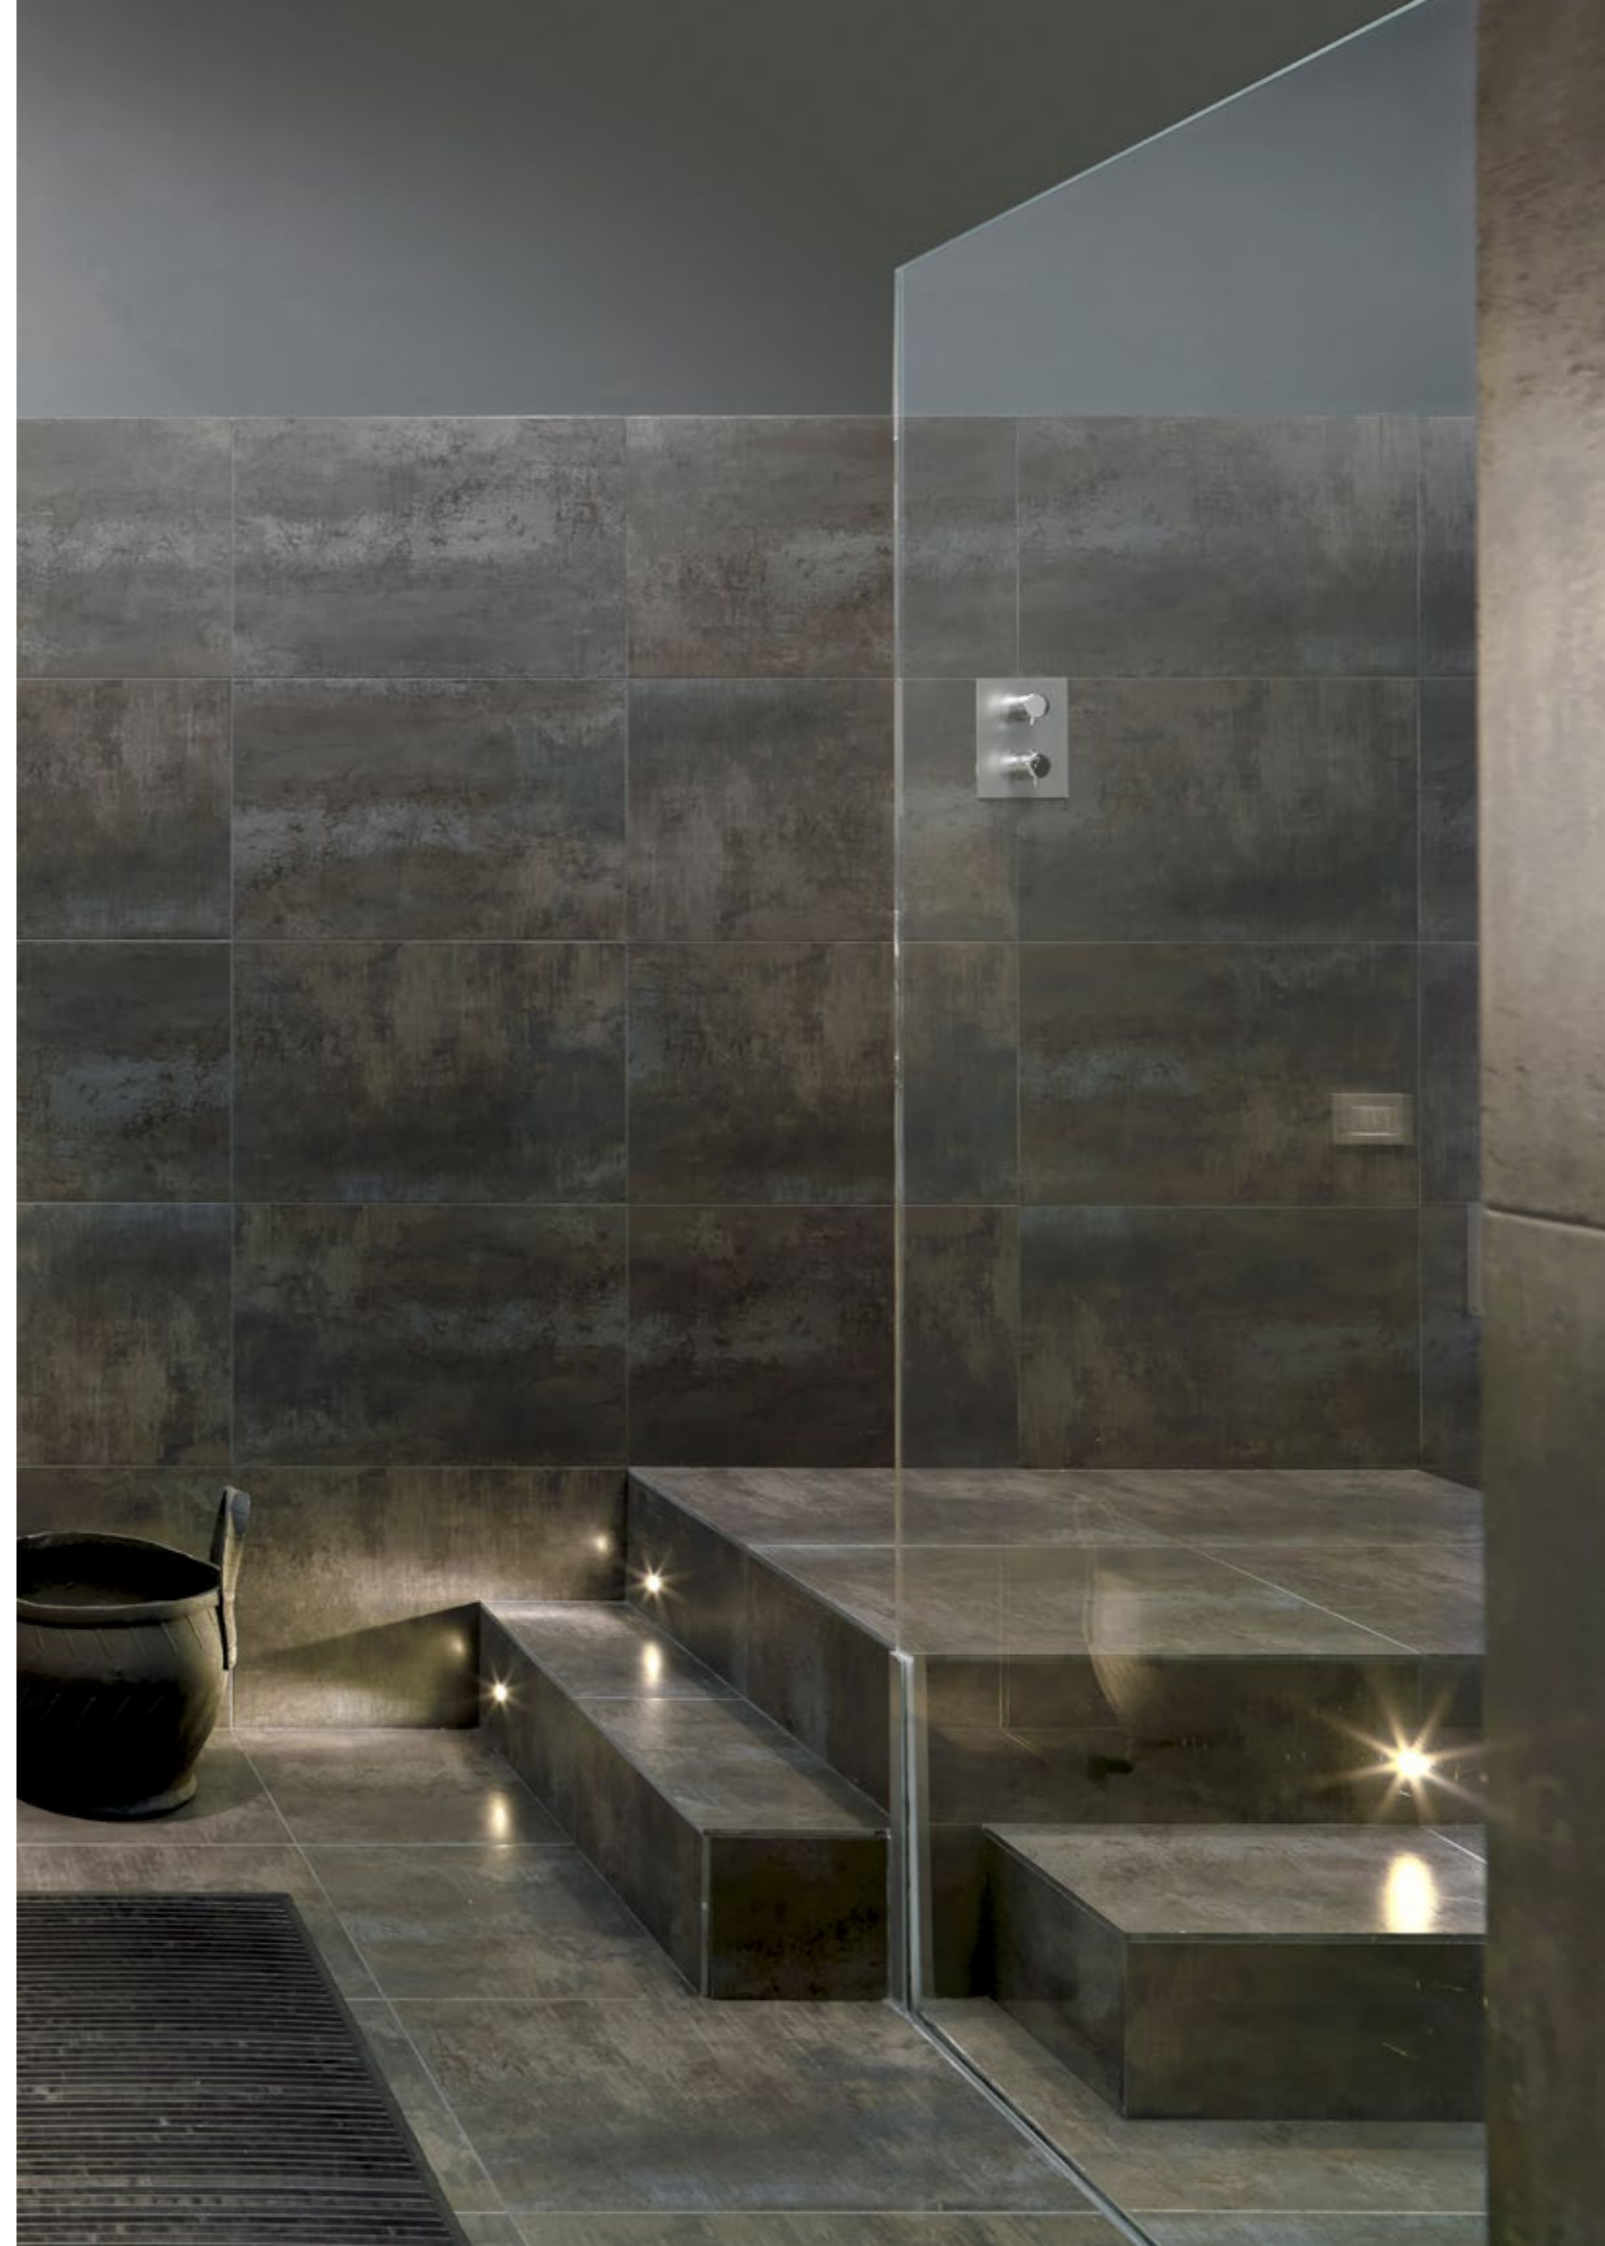

# POINT AS




# POINT 1AS RD

IP67 - Classe III - CE / F




3000K	4000K
20505.--.31	20505.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
 remote SELV driver not included




# POINT 1AS SQ



3000K	4000K
20506.--.31	20506.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
 remote SELV driver not included



Colore standard 1 settimana  
 Standard color 1 week

● .40 Acciaio  
 Stainless steel

Colore su richiesta 2 settimane  
 Upon request color 2 weeks

- .01 Bianco  
White (matt)
- .19 Grigio argento  
Silver grey (matt)
- .22 Nero  
Black (matt)
- .45 Ruggine  
Rust
- .50 Cromo lucido  
Polished chrome


## ACCESSORI / ACCESSORIES



**22001**  
 Alimentatore IP20 350mA  
 1 per max 10 Point  
 LED driver IP20 350mA  
 1 for max 10 Point



**22080**  
 Connettore rapido IP 68  
 IP 68 fast connector



**20584**  
 Controcassa Point 1  
 rough-in housing Point 1


# POINT 2AS RD

IP67 - Classe III - CE / F




3000K	4000K
20535.--.31	20535.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
*remote SELV driver not included*




# POINT 3AS RD

IP67 - Classe III - CE / F




3000K	4000K
20533.--.31	20533.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
*remote SELV driver not included*




# POINT 2AS SQ




3000K	4000K
20532.--.31	20532.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
*remote SELV driver not included*




# POINT 3AS SQ



3000K	4000K
20534.--.31	20534.--.41

**1W LED 120 lm CRI > 85**  
 80° ^  
 max 350mA DC  
 alimentatore remoto SELV non incluso  
*remote SELV driver not included*



Colore standard 1 settimana  
*Standard color 1 week*

**.40** Acciaio  
*Stainless steel*

Colore su richiesta 2 settimane  
*Upon request color 2 weeks*

**.01** Bianco  
*White (matt)*

**.19** Grigio argento  
*Silver grey (matt)*

**.22** Nero  
*Black (matt)*

**.45** Ruggine  
*Rust*

**.50** Cromo lucido  
*Polished chrome*


## ACCESSORI / ACCESSORIES



**22001**  
 Alimentatore IP20 350mA  
 1 per max 10 Point  
 LED driver IP20 350mA  
 1 for max 10 Point



**22080**  
 Connettore rapido IP 68  
 IP 68 fast connector



**20585**  
 Controcassa Point 2  
 rough-in housing Point 2

Colore standard 1 settimana  
*Standard color 1 week*

**.40** Acciaio  
*Stainless steel*

Colore su richiesta 2 settimane  
*Upon request color 2 weeks*

**.01** Bianco  
*White (matt)*

**.19** Grigio argento  
*Silver grey (matt)*

**.22** Nero  
*Black (matt)*

**.45** Ruggine  
*Rust*

**.50** Cromo lucido  
*Polished chrome*


## ACCESSORI / ACCESSORIES



**22001**  
 Alimentatore IP20 350mA  
 1 per max 10 Point  
 LED driver IP20 350mA  
 1 for max 10 Point



**22080**  
 Connettore rapido IP 68  
 IP 68 fast connector



**20586**  
 Controcassa Point 3  
 rough-in housing Point 3