

S814X1003BK



Microstep

Microstep squared

Asymmetric emission.

Kit for installation and driver to be ordered separately.

B white

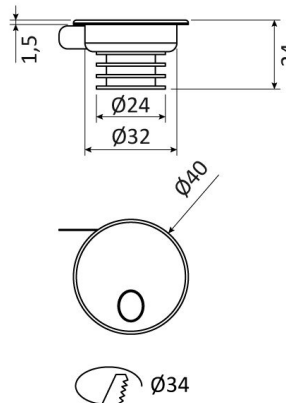

Installations

Led step lighting fixture for wall recessed installation in plasterboard, or in concrete by "503" wall box (ordered separately).

Material

Frame made of painted in white colour (RAL 9016 opaque) aluminium alloy; heat sink made of aluminium alloy.

Wiring

Complete with power supply cable separated, stabilized electronic driver 700mA. The devices can be driven at a current lower than indicated.

AWG22 supply cables L=200mm.

Compliance

In accordance with standard: CEI EN 60598-1:2008 + A11:2009, IEC 60598-2-2, CEI EN 62471:2010-01.

Sources

Power: 1.2/3W

Color temperature: 3200K


Lamp included

S814X1003BK

Microstep


Microstep squared

Accessories




A814K0001KK


Wall plaque




E907K0001KK
Electronic
stabilized driver
700mA 6W max




E907K0012KK
Electronic
stabilized driver
700mA 12W max




E907K0017KK
Electronic
stabilized driver
700mA 17W max



E907K0030KK
Electronic
stabilized driver
700mA 30W max



E903K0006KK
Electronic
stabilized driver
350mA 6W max



E903K0015KK

Electronic
stabilized driver
350mA 15W max