


# ZERO

design Francesco Brivio




Lampada da parete a luce indiretta dalla forma geometrica e minimale. Grazie alla sua eleganza essenziale trova la sua perfetta collocazione in ambiti sia commerciali che residenziali, impreziosendo i diversi ambienti grazie alle finiture metalliche e materiche. L'ottica asimmetrica racchiusa all'interno del corpo illuminante rende l'apparecchio particolarmente indicato per l'enfatizzazione di elementi architettonici quali volte o archi e la staffa da cui è sorretta consente l'orientabilità del prodotto di 180° su entrambi i lati.

*Wall lamp with an indirect light emission and a simple and geometric shape. Suitable for lighting commercial and residential spaces. Thanks to its essential elegance, it is perfectly positioned in both commercial and residential environments, enriching the different environments thanks to metallic and material finishes. Available with asymmetrical optics and also, it is fully adjustable (180°) on both sides.*

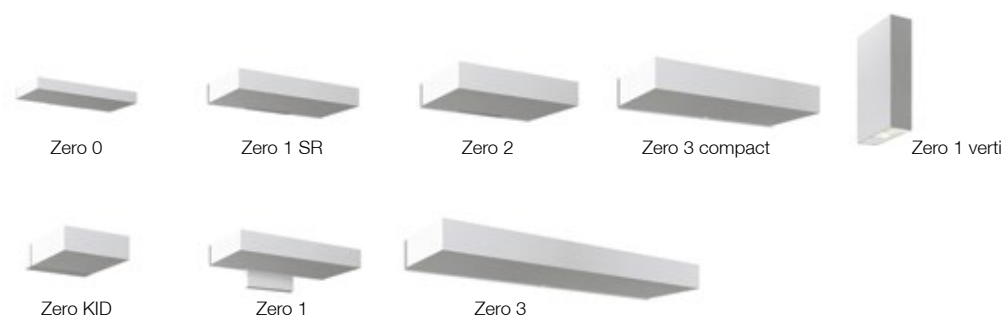

# ZERO 1

IP40 - Classe I - CE / F



**3000K** **4000K**


**24305.--.31** **24305.--.41**

**17W LED 2600 lm CRI > 85** (≥ 95 upon request )  
120° ^  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*

**05556.--.31.A 1-10V** **05556.--.41.A 1-10V**

**26W LED 3600 lm CRI > 85** (≥ 95 upon request )  
120° ^  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*

# ZERO 1



**3000K** **4000K**

**24306.--.31.P PUSH** **24306.--.41.P PUSH**

**26W LED 3600 lm CRI > 85** (≥ 95 upon request )  
120° ^  
220÷240V 50/60 Hz  
alimentatore elettronico incluso  
*electronic driver included*

**24303.--.31.D DALI** **24303.--.41.D DALI**

**26W LED 3600 lm CRI > 85** (≥ 95 upon request )  
120° ^  
220÷240V 50/60 Hz  
alimentatore elettronico remoto SELV incluso  
*remote SELV electronic driver included*

**05560.--**

**300W HAL QT-DE R7S**  
120° ^  
220÷240V 50/60 Hz

## North America

**05556.--.35.A 1-10V** **05556.--.45.A 0-10V**

**26W LED 3600 lm CRI > 85** (≥ 95 upon request )  
120° ^  
120V 60 Hz  
alimentatore elettronico incluso  
*electronic driver included*



Colore standard 1 settimana  
*Standard color 1 week*

○ **.01** Bianco  
*White (matt)*

Colore su richiesta 2 settimane  
*Upon request color 2 weeks*

● **.19** Grigio argento  
*Silver grey (matt)*  
● **.22** Nero  
*Black (matt)*  
● **.45** Ruggine  
*Rust*

Colore speciale su richiesta 4/6 settimane  
*Upon request color 4/6 weeks*

● **.39** Effetto nickel  
*Nickel effect*  
● **.56** Effetto oro spazzolato  
*Brushed gold effect*  
● **.51** Effetto fibra di carbonio  
*Carbon fiber effect*  
● **.30** Effetto rovere sbiancato  
*Whitened oak effect*  
● **.32** Effetto noce  
*Walnut effect*  
● **.33** Effetto wengè  
*Wengè effect*  
● **.43** Effetto cemento  
*Concrete effect*