



218

# TILE



LED



LED



LED



Apparecchio LED IP65 per installazione a parete. Sorgenti LED warm white 3000K. Disponibile versione monoemissione ( diretta o indiretta) e versione biemissione (diretta ed indiretta).

## MATERIALI

Corpo in pressofusione di alluminio anodizzato e verniciato a polvere; vetro goffrato di protezione LED.

## CABLAGGIO

Alimentazione elettronica integrata 220-240V 50/60Hz.

IP65 LED fixture luminary for wall-mounted installation. LED sources warm white 3000K. Available in both mono (direct or indirect) and biemission (direct and indirect) versions.

## MATERIALS

Body made of anodized and powder coated die-casting aluminium alloy; embossed glass for LED protection.

## WIRING

Integrated electronic 220-240V 50/60Hz driver.


**TILE applique LED monoemissione, alimentatore elettronico incluso**  
**TILE monoemission LED wall fixture, electronic driver included**

**3000 K**

Codice/Code	W Led	Flusso apparecchio (lm) Fixture flux (lm)
<b>101401.94</b>	1x12	720



■ \_94 - Grigio antracite/Anthracite Grey

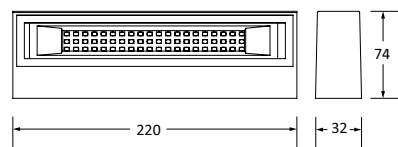


**TILE applique LED biemissione, alimentatore elettronico incluso**  
**TILE biemission LED wall fixture, electronic driver included**

**3000 K**

Codice/Code	W Led	Flusso apparecchio (lm) Fixture flux (lm)
<b>101402.94</b>	2x8	960



■ \_94 - Grigio antracite/Anthracite Grey

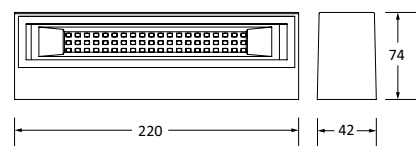

219

**MINI TILE applique LED monoemissione, alimentatore elettronico incluso**  
**MINI TILE monoemission LED wall fixture, electronic driver included**

**3000 K**

Codice/Code	W Led	Flusso apparecchio (lm) Fixture flux (lm)
<b>101403.94</b>	1x6	360



■ \_94 - Grigio antracite/Anthracite Grey

