



0595 Smart XS

05957BN1

Application Area

indoor

Description

Cutting hole



70mm

Lamp specification

Subcategory: Advanced

Generation: D1

LES: SAM 10

MacAdam: 3

Color temp.: 3000K

IRC/CRI: IRC >90

Nominal luminous flux: 1415lm

Beam Angle: 40°

Wiring Specification

220-240V 50-60Hz

Power 12W

Construction specifications

Body: Die-cast aluminium body

Optic: Polycarbonate lens diffuser

Color: White

Painting:


TA max: 30°

Photobiological safety: 1

IP rate: 20

Glow wire: 850°

Duration: 50.000h

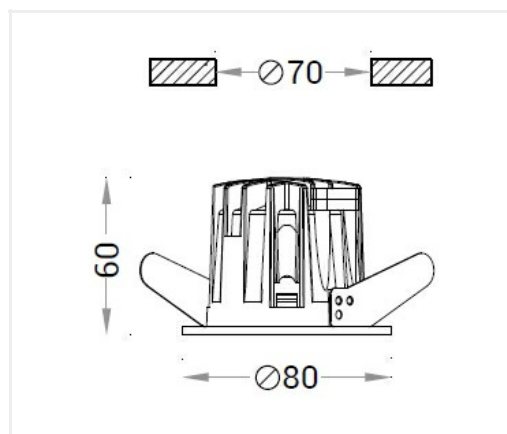



Ilmas S.p.A.
Via Vittorio Veneto, 23b
20010 Bernate Ticino (MI)
P. Iva: IT 04095080158



tel. +39 02 93900 349
tel. +39 02 93900 353
fax. +39 02 93900 357



<http://www.ilmas.com>
ilmas@ilmas.com

Weight: 0.2kg

Accessories

ilmas

0595 Smart XS 059518

ilmas

0595 Smart XS 059515

ilmas

0595 Smart XS 059511

ilmas

0595 Smart XS 059510

ilmas

0595 Smart XS 9000B93

ilmas

0595 Smart XS 059516

ilmas

0595 Smart XS 9000B91

ilmas

0595 Smart XS 059514

ilmas

0595 Smart XS 059513

ilmas

0595 Smart XS 059517