


mira 45

LED
powered by
Seoul® Semiconductor Z5M

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:
| art. | LED |  | anodized |
5441 L2 H inx

art.
5441

design Ufficio Tecnico Landa




corpo alluminio estruso
anodizzato
body in extruded anodized
aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium

diffusore vetro trasparente
e opale
diffuser glass transparent
and opal
diffuser verre transparent
et opale
difusor vidrio transparente
y ópalo
Diffuser Glas klar und opal

28 | RECESSED




5441



codeLS2




5441





codeLL2



5441



codeL2



FOR TECHNICAL DETAILS VISIT
www.landa.it

IP67

art.	LUX 1mt	art.	LUX 1mt	art.	LUX 1mt	W	V	Type	Ⓛ	Ra
5441LS2N 1600	10°	5441LL2N 280	40°	5441L2N 40	2	24	4000K	160LM	80	80
5441LS2H 1600		5441LL2H 280		5441L2H 40			3000K	160LM	80	80

ELECTRIFICATION



dettagli / details / details
détalles / details:
p.A54 - A55

Energy efficiency classes

Trasformer available:

cod. 0409BT014 to connect up to 5 pieces – GE LIGHTING IP67 24V c.c. 12W
cod. 0409BT015 to connect up to 10 pieces – GE LIGHTING IP67 24V c.c. 25W

Trasformer on request:

cod. 0409BT016 to connect up to 42 pieces – GE LIGHTING IP67 24V c.c. 100W

A++ ÷ A

Accessories on request:



code 0404M009
Single connection IP68

mira 45 (24V)

Projectors

NEW

Recessed

Contemporary

Traditional



29 | RECESSED



Thanks to Ioannides Lighting LTD - CY



Thanks to Ioannides Lighting LTD - CY



...brz



...inx




mira 45

LED


powered by
Seoul® Semiconductor Z5M

asimetrico
asymmetric
asymétriques
asimétrico
asymmetrisch

example code:
| art. | LED |  | anodized |
5442 L2 H inx

art.
5442
5443
5444

design Ufficio Tecnico Landa

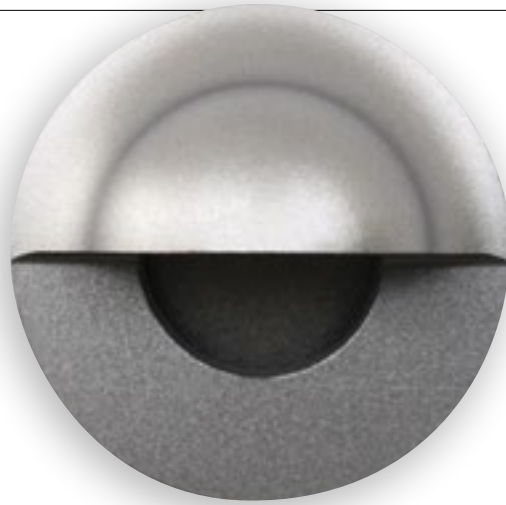


corpo alluminio estruso
anodizzato
body in extruded anodized
aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium



diffusore vetro opale
diffuser glass opal
diffuser verre opale
difusor vidrio ópalo
Diffuser Glas opal



5442




codeL2



5443








codeL2



FOR TECHNICAL DETAILS VISIT
www.landa.it

IP67

art.	art.		W	V	Type		Ra
5442L2N	5443L2N		2	24	4000K 160LM	80	
5442L2H	5443L2H				3000K 160LM	80	



ELECTRIFICATION

LED

dettagli / details / details
detales / details:
p.A54 - A55

Energy efficiency classes

Trasformer available:

cod. 0409BT014 to connect up to **5** pieces – GE LIGHTING IP67 24V c.c. 12W
cod. 0409BT015 to connect up to **10** pieces – GE LIGHTING IP67 24V c.c. 25W

Trasformer on request:

cod. 0409BT016 to connect up to **42** pieces – GE LIGHTING IP67 24V c.c. 100W

A++ ÷ A

mira 45 (24V)

Projectors
NEW
Recessed

Contemporary

Traditional




RECESSED



31




5444



code ...L2



...brz



...inx

art.		W	V	Type		Ra
5444L2N		2	24	4000K 160LM		80
5444L2H		2	24	3000K 160LM		80

Accessories on request:



code 0404M009
Single connection IP68

