


Art. F.6874

KOS Applique LED 2x4.8W (C0-C90 20°) 220/240V 50/60Hz

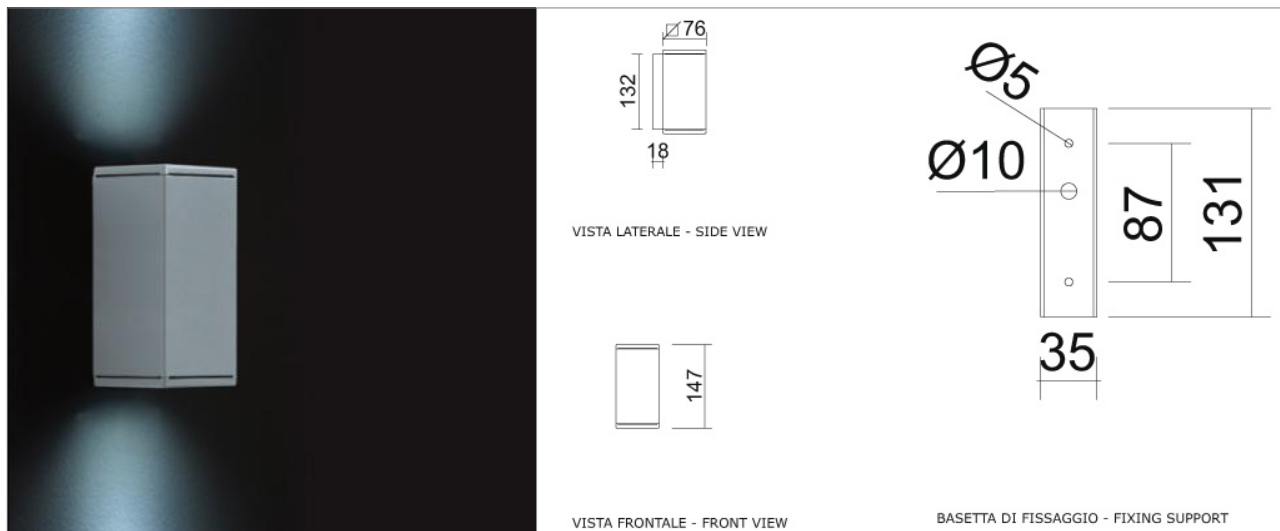

SPECIFICATION SHEET

Housing:

Extruded aluminium body 6060T5, Die-cast aluminium ring with high oxidation resistance ENAB 44300, Fixing base in aluminium.

Diffuser:

Transparent tempered glass diffuser (on request frosted glass)

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Wiring:

Seal rings IP67 Rutaseal M12 for cable @4-7mm.

Installation:

Applique.

Dimensions:

Fixing base height 61mm width 45mm depth 18mm, side body 76mm height 147mm.

Weight:

0.56 Kg

Color:

.1 anthracite, .2 white, .4 grey aluminium, .8 corten

Option:

LED .28 3000°K. .29 6000°K. .31 beam 10° .32 beam 40°

Accessories:

F.104 connector IP68.

SOURCE DESCRIPTION

Color Temperature:

4000°K

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 2x398 lm. Total absorbed power 9,5w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

European Certification:

CE

Protection Class:

IP65-IK07

Insulation Class:

Class II

Energy Efficiency:

