


## Art. F.6853

### miniMOK Applique LED 2X4.8W (C0-C90 20°) 220-240V 50/60Hz

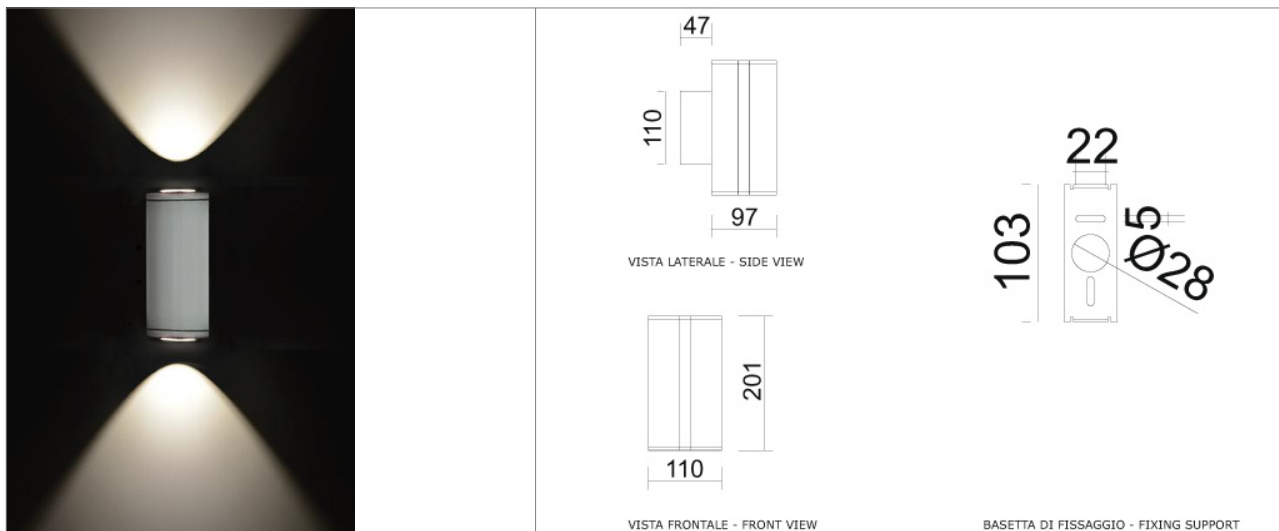

#### SPECIFICATION SHEET

##### Housing:

Extruded aluminium body 6060T5, Die-cast aluminium ring with high oxidation resistance ENAB 44300, Fixing base in aluminium.

##### Diffuser:

Transparent tempered glass diffuser

##### Closing screws:

Screws in stainless steel A4

##### Rubber gasket:

Silicone rubber gaskets

##### Wiring:

Brass cable blocker IP68 of nickel plated M12 for cable @3-7mm.

##### Installation:

Applique.

##### Dimensions:

Fixing base height 110mm width 49mm depth 47mm, body 110X97mm height 201mm.

##### Weight:

0.85 Kg

##### Color:

.1 anthracite, .2 white, .4 grey aluminium, .8 corten

##### Option:

LED .28 3000°K. .29 6000°K. .31 beam 10° .32 beam 40°

#### SOURCE DESCRIPTION

##### Color Temperature:

4000°K

##### CRI:

CRI 85

##### Rated luminous flux:

Lighting flow: 2x398 lm. Total absorbed power 9.5w.

#### CERTIFICATIONS

##### Normative:

EN60598 and relative specifications

##### European Certification:

CE

##### Protection Class:

IP65-IK08

##### Insulation Class:

Class I

##### Energy Efficiency:

