


Art. F.6999

miniCLASS Applique LED 19W (C0 27.6°-C90 46°) 220/240V

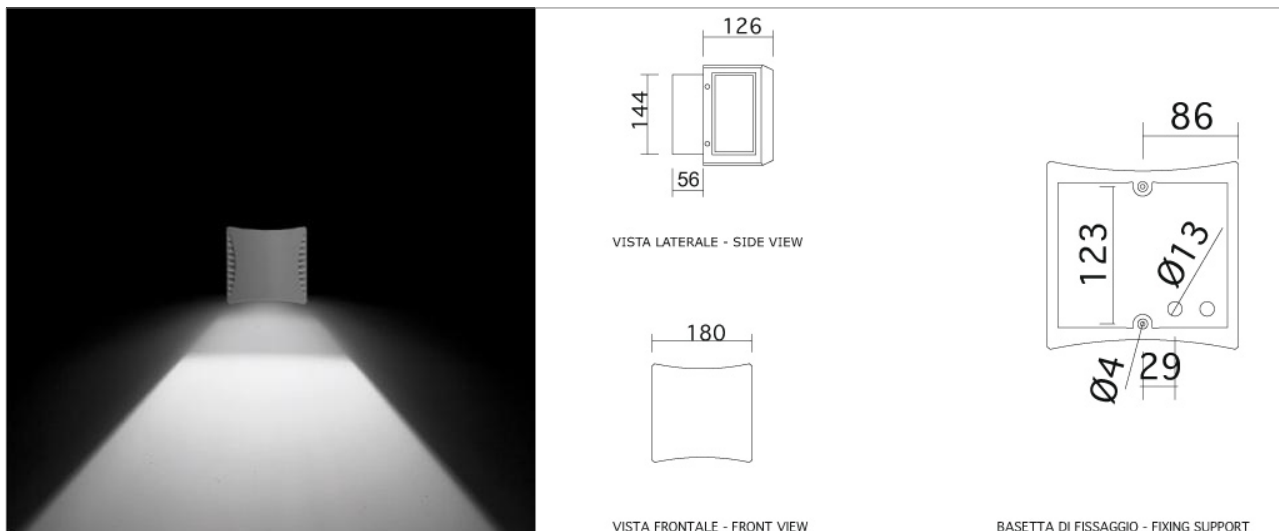

SPECIFICATION SHEET

Housing:

Housing and cover in die-cast aluminium ENAB 46100.

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Epdm rubber gaskets

Wiring:

Polyamide cable blocker IP68 PG11 for cable Ø5-10mm.

Installation:

Applique.

Dimensions:

Fixing base side 144mm, depth 182mm, side body 180mm.

Weight:

2.43 Kg

Color:

.1 anthracite, .2 white, .4 grey aluminium, .8 corten

Option:

LED .28 3000°K

SOURCE DESCRIPTION

Color Temperature:

4000°K

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 2455 lm. Total assorbed power 21w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

European Certification:

CE

Protection Class:

IP65-IK08

Insulation Class:

Class I

Energy Efficiency:

