


Art. F.6910

MOK Applique LED 2x16W (C0-C90 25°) 220-240V 50/60Hz

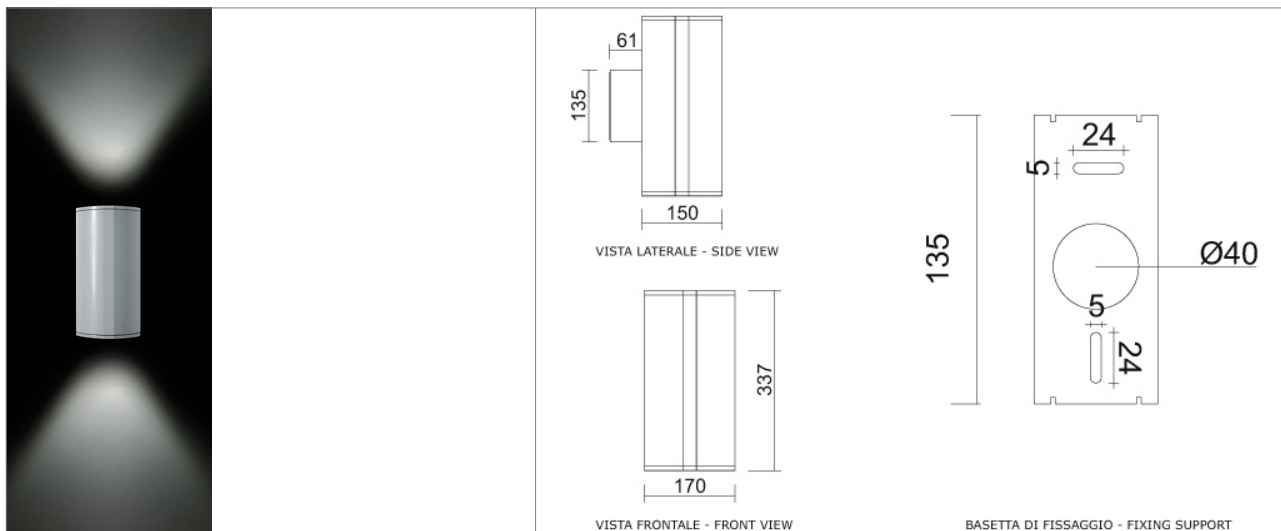

SPECIFICATION SHEET

Housing:

Extruded aluminium body 6060T5, Die-cast aluminium ring with high oxidation resistance ENAB 44300, Fixing base in aluminium.

Diffuser:

Transparent tempered glass diffuser

Closing screws:

Screws in stainless steel A4

Rubber gasket:

Silicone rubber gaskets

Wiring:

Brass cable blocker IP68 of nickel plated M12 for cable @3-7mm.

Installation:

Applique.

Dimensions:

Fixing base height 142mm width 57mm depth 56mm, body 170X150mm height 337mm.

Weight:

1.80 Kg

Color:

.1 anthracite, .2 white, .4 grey aluminium, .8 corten

Option:

LED .28 3000°K. .29 6000°K. .31 beam 10° .32 beam 40°

SOURCE DESCRIPTION

Color Temperature:

4000°K

CRI:

CRI 85

Rated luminous flux:

Lighting flow: 2x1100 lumen. Total absorbed power 36w.

CERTIFICATIONS

Normative:

EN60598 and relative specifications

European Certification:

CE

Protection Class:

IP65-IK08

Insulation Class:

Class I

Energy Efficiency:

