



**Sub** | Underwater luminaires | powerLED 1.5 W 500 mA

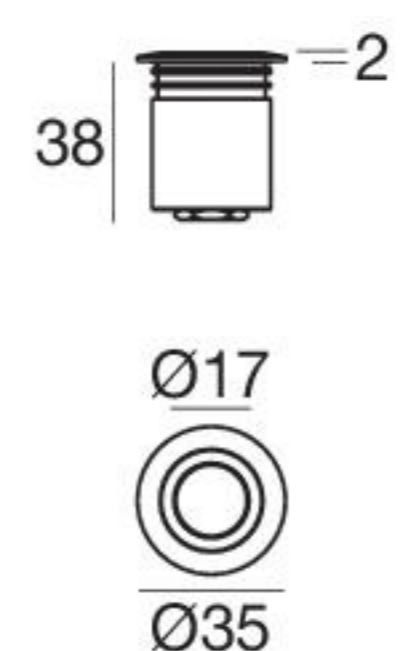

type		colour			optic	
Steel	CRI 80 <b>97315</b>	3000 K	178 lm	<b>W</b>	15°	<b>15</b>
		4000 K	190 lm	<b>N</b>	30°	<b>30</b>
		5000 K	216 lm	<b>C</b>	60°	<b>60</b>
		Red		<b>R</b>	Diff.	<b>00</b>
		Green		<b>G</b>		
		Blue		<b>B</b>		
		Yellow		<b>Y</b>		

<b>89422</b>	<b>89423</b>	<b>99181</b>	<b>98148</b>	<b>98060</b>
ON/OFF 1 - 2 art.	ON/OFF 2 - 3 art.	ON/OFF 3 - 6 art.	Outer casing	Outer casing


**Sub** | Underwater luminaires | powerLED 1.5 W 500 mA

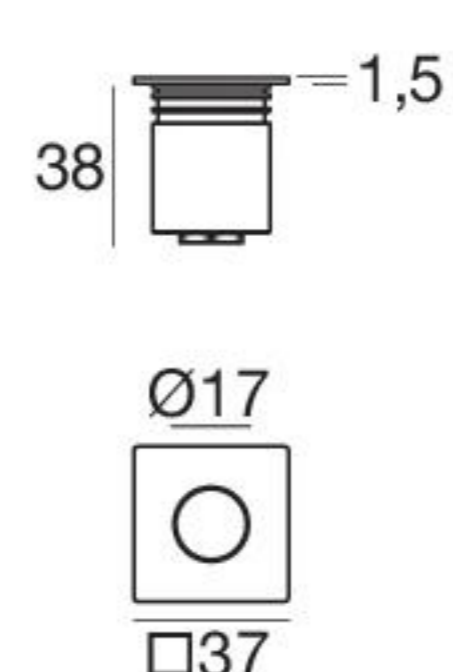

type		colour			optic	
Steel	CRI 80 <b>97316</b>	3000 K	178 lm	<b>W</b>	15°	<b>15</b>
		4000 K	190 lm	<b>N</b>	30°	<b>30</b>
		5000 K	216 lm	<b>C</b>	60°	<b>60</b>
		Red		<b>R</b>	Diff.	<b>00</b>
		Green		<b>G</b>		
		Blue		<b>B</b>		
		Yellow		<b>Y</b>		

<b>89422</b>	<b>89423</b>	<b>99181</b>	<b>98148</b>	<b>98060</b>
ON/OFF 1 - 2 art.	ON/OFF 2 - 3 art.	ON/OFF 3 - 6 art.	Outer casing	Outer casing

**Sub** | Underwater luminaires | powerLED 1.5 W 500 mA

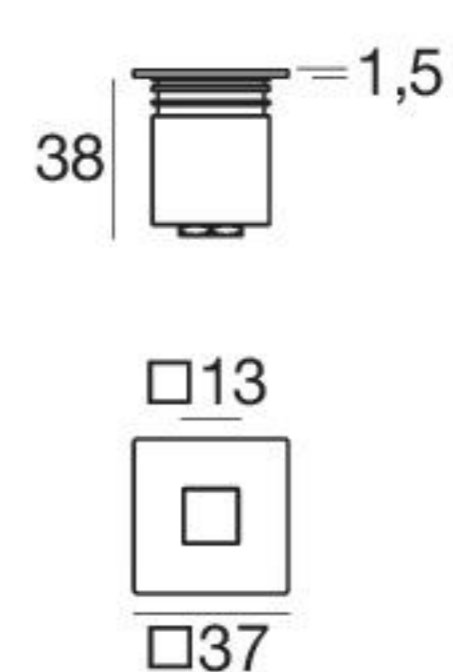

type		colour			optic	
Steel	CRI 80 <b>97317</b>	3000 K	178 lm	<b>W</b>	15°	<b>15</b>
		4000 K	190 lm	<b>N</b>	30°	<b>30</b>
		5000 K	216 lm	<b>C</b>	60°	<b>60</b>
		Red		<b>R</b>	Diff.	<b>00</b>
		Green		<b>G</b>		
		Blue		<b>B</b>		
		Yellow		<b>Y</b>		

<b>89422</b>	<b>89423</b>	<b>99181</b>	<b>98148</b>	<b>98060</b>
ON/OFF 1 - 2 art.	ON/OFF 2 - 3 art.	ON/OFF 3 - 6 art.	Outer casing	Outer casing

**Sub** | Watertight outer-casing



type	Ø mm	h. mm	suitable for
PVC	75	93	Sub <b>98148</b>

**Sub** | Outer-casing



type	Ø mm	h. mm	suitable for
PVC	70	54	Sub <b>98060</b>