

D. OPTIC 25° 2	X. CRI80 5	Y. 4000K 7	DIM 1-10V A1
OPTIC 60° 6	CRI90 6	3000K 8	DALI A2


AIR

Apparecchio da incasso per interni. Realizzato in alluminio verniciato con lenti a 25° o 60°. Alimentabile a 350 o 500 mA. Alimentatore escluso.


Recessed indoor fitting. Realized in coated aluminium with 25° or 60° lenses. Air can be supplied at 350 or 500 mA. Driver excluded.



- 32- bianco raggrinzante / rough white
- 33- nero raggrinzante / rough black
- 37- grigio chiaro opaco / clear matt grey
- 99- custom

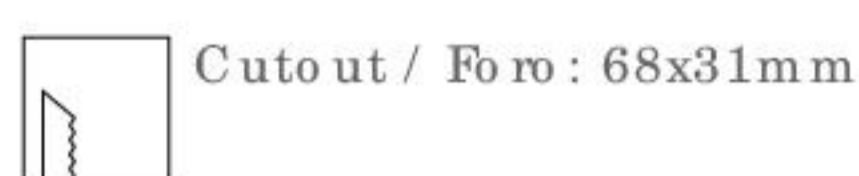

68x31

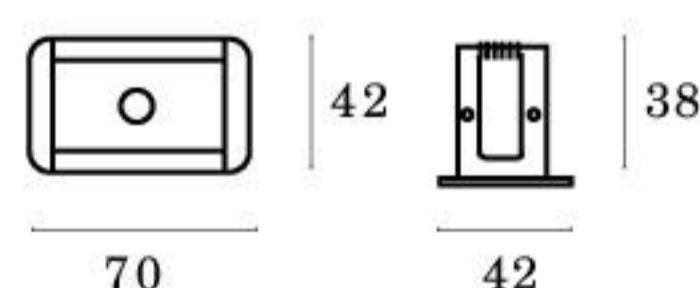


AIR 1

CODICE / CODE	D.MM	W	LM	FASCIO/BEAM
JAL5261. 2 X Y. Z	70x42	1.2/2W/230V LED 350/500mA	108/93	25°
JAL5261. 6 X Y. Z	70x42	1.2/2W/230V LED 350/500mA	108/93	60°



98x31

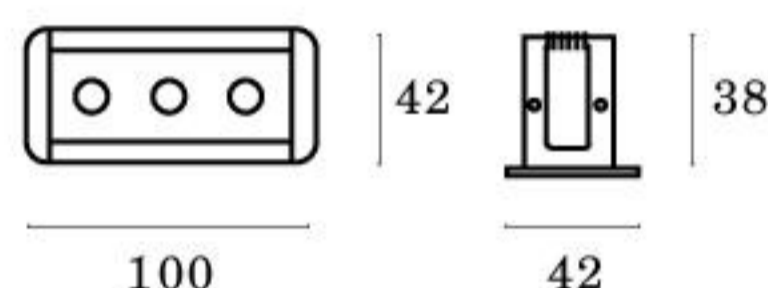


AIR 3

CODICE / CODE	D.MM	W	LM	FASCIO/BEAM
JAL5263. 2 X Y. Z	100x42	3x1.2/2W/230V LED 350/500mA	323/278	25°
JAL5263. 6 X Y. Z	100x42	3x1.2/2W/230V LED 350/500mA	323/278	60°



153x31

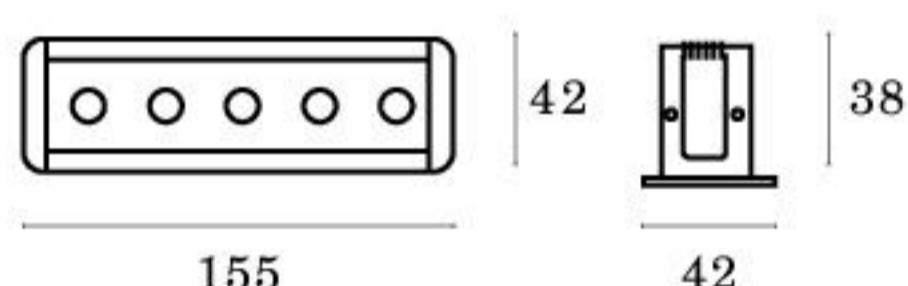


AIR 5

CODICE / CODE	D.MM	W	LM	FASCIO/BEAM
JAL5265. 2 X Y. Z	155x42	5x1.2/2W/230V LED 350/500mA	538/462	25°
JAL5265. 6 X Y. Z	155x42	5x1.2/2W/230V LED 350/500mA	538/462	60°



208x31

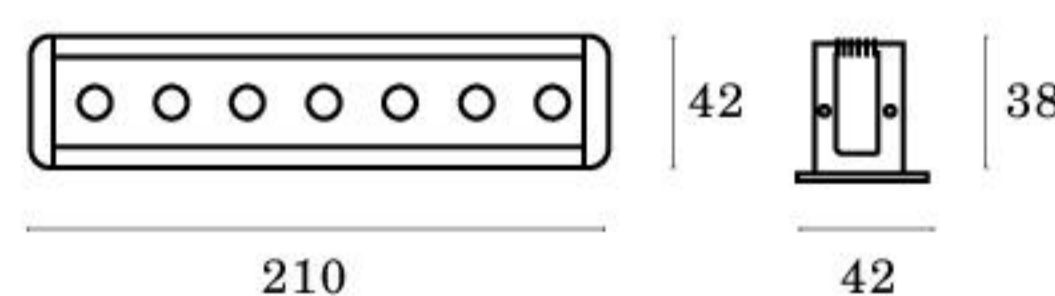

AIR 7

CODICE / CODE	D.MM	W	LM	FASCIO/BEAM
JAL5267. 2 X Y. Z	210x42	7x1.2/2W/230V LED 350/500mA	756/650	25°
JAL5267. 6 X Y. Z	210x42	7x1.2/2W/230V LED 350/500mA	756/650	60°

ACCESSORI / ACCESSORIES



CODICE / CODE

AAA.TRSL00
AAA.TRSL05
AAA.TRSL41
AAA.TRSL45

DESCRIZIONE / DESCRIPTION

Driver 3W/350mA.
Driver 19W/350mA.
Driver 6W/500mA.
Driver 20W/500mA.