
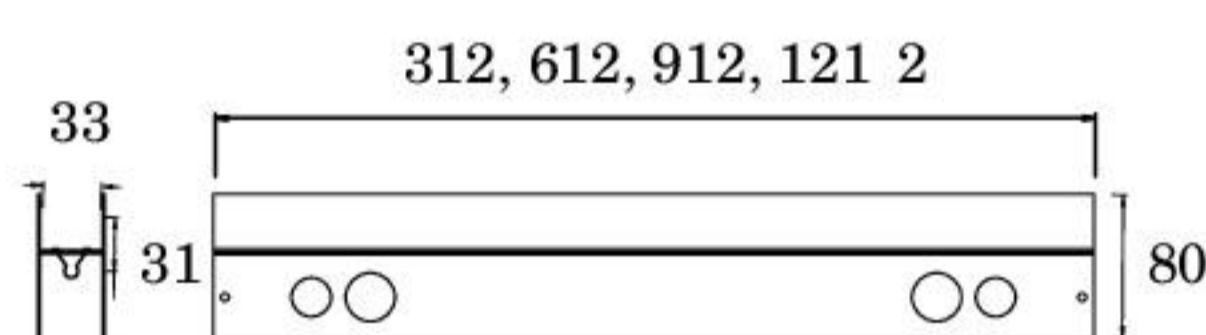
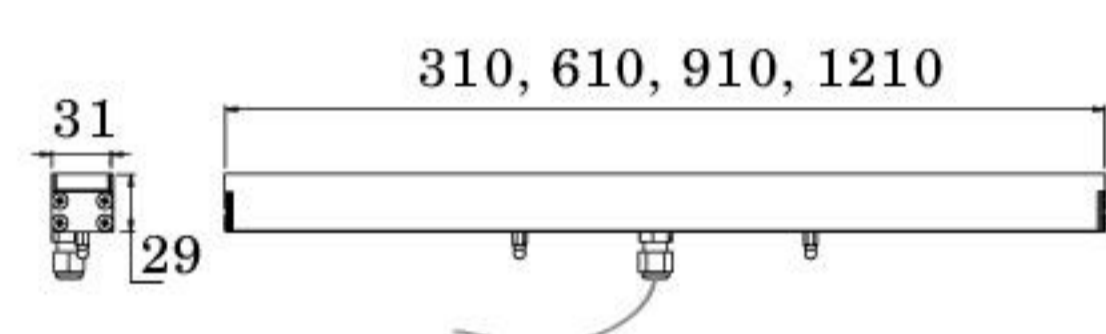


## RAISE


Profilo carrabile è in estruso di alluminio. Diffusore in vetro temperato (spessore 6 mm). Testate in alluminio pressofuso, guarnizioni in silicone e viteria in acciaio inox A4. Driver escluso.

The structure is made of extruded aluminum. Tempered glass diffuser (6mm thick). Die-cast aluminum end caps, silicon gaskets and stainless steel A4 screws. Driver excluded.

● 37- grigio chiaro opaco/clear matt grey

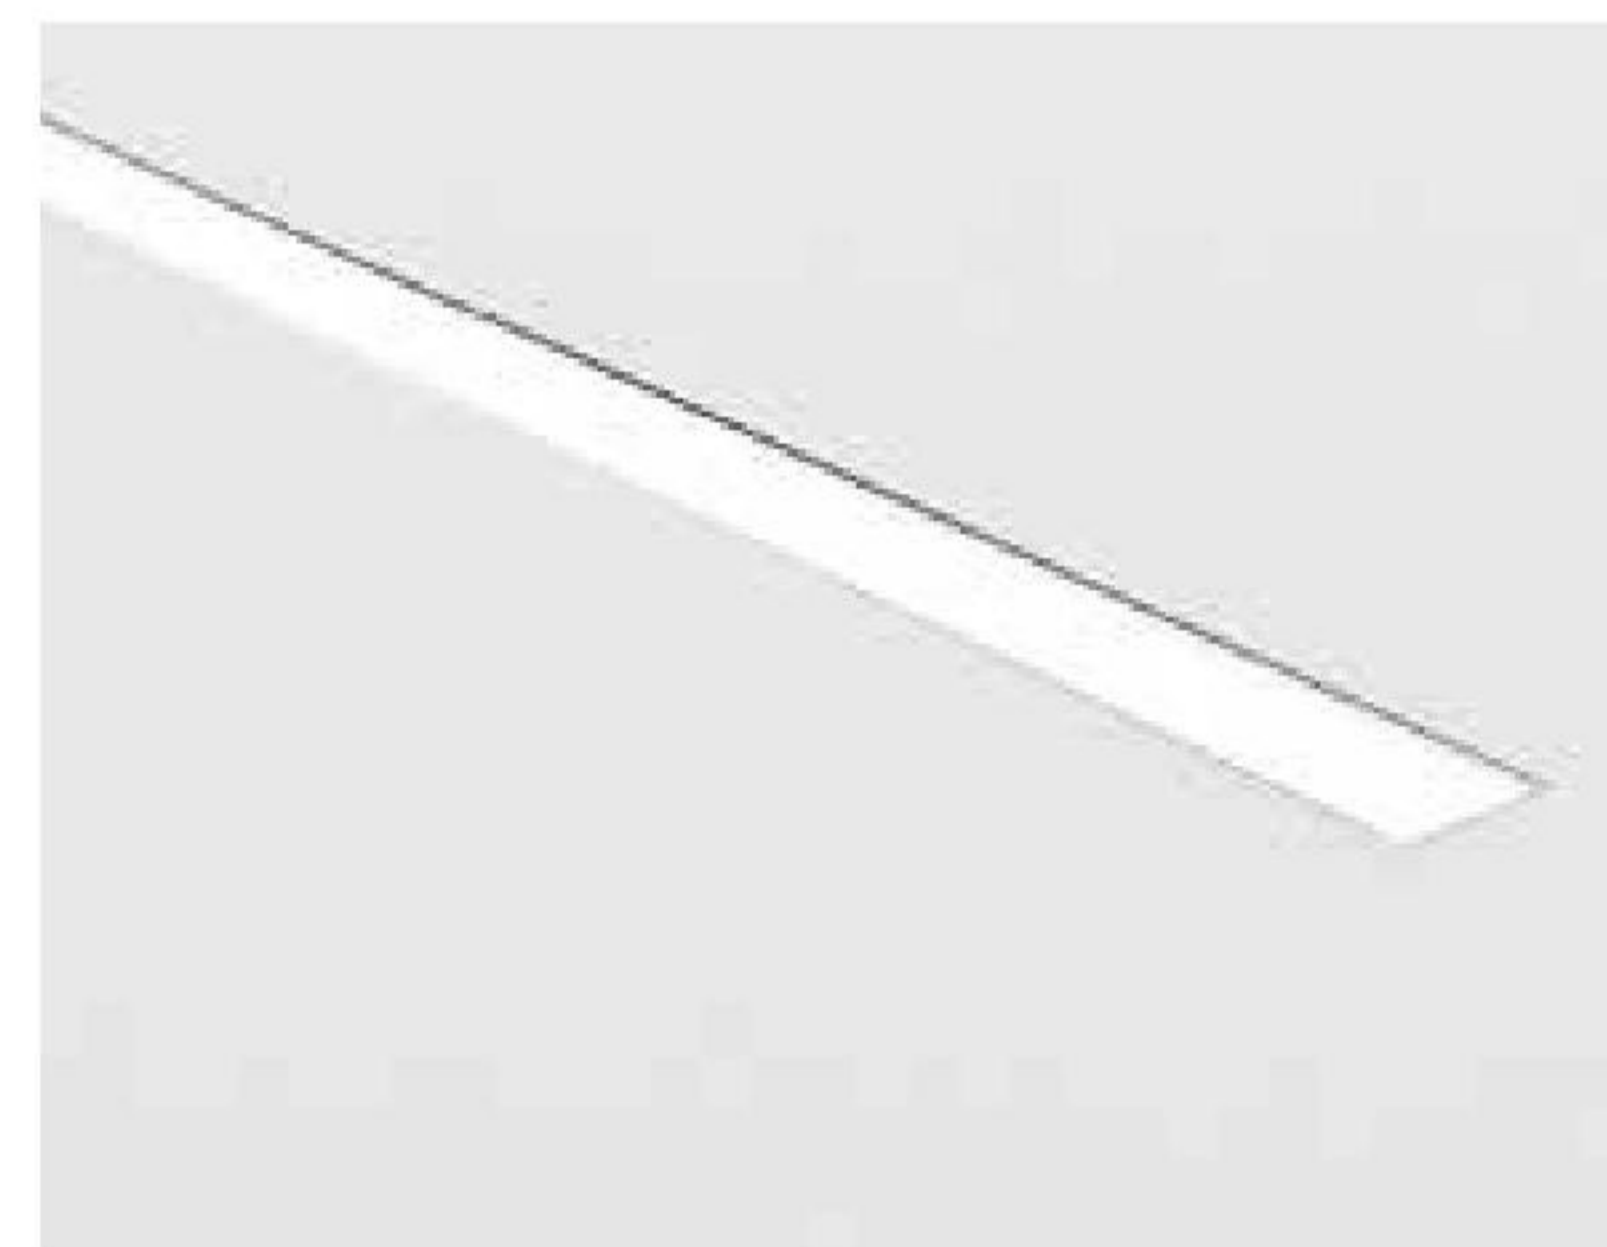

CODICE / CODE	L.MM	W	LM	FASCIO / BEAM	DRIVER
<b>JER.5850.0 X Y. Z</b>	310	7.5W/24V LED	576/522	108°	driver excluded
<b>JER.5851.0 X Y. Z</b>	610	15W/24V LED	1152/1044	108°	driver excluded
<b>JER.5852.0 X Y. Z</b>	910	22.5W/24V LED	1728/1560	108°	driver excluded
<b>JER.5853.0 X Y. Z</b>	1210	30W/24V LED	2304/2088	108°	driver excluded

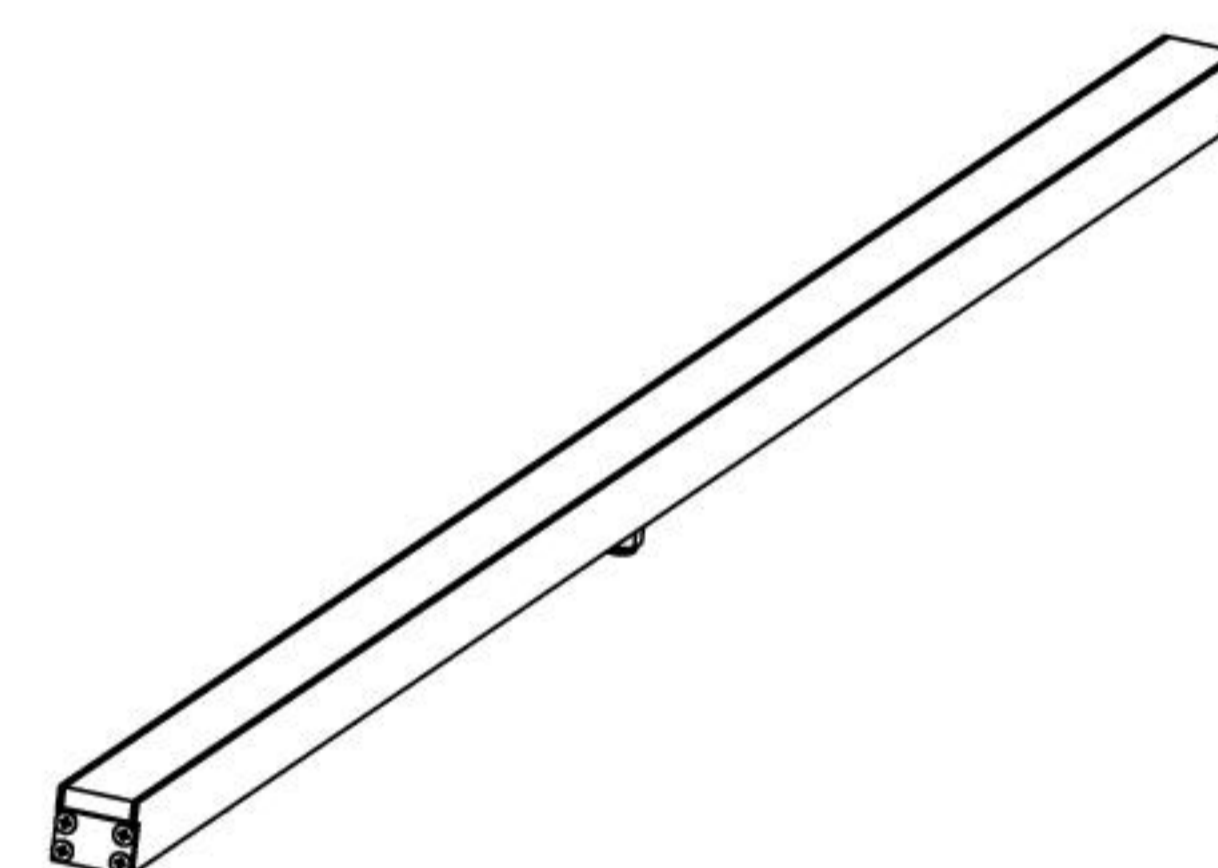

### ACCESSORI / ACCESSORIES



CODICE / CODE	DESCRIZIONE / DESCRIPTION
<b>JER.5850.000</b>	Cassa forma per incasso L310mm. Recessed housing using L310.
<b>JER.5850.001</b>	Cassa forma per incasso L610mm. Recessed housing using L610.
<b>JER.5850.002</b>	Cassa forma per incasso L910mm. Recessed housing using L910.
<b>JER.5850.003</b>	Cassa forma per incasso L1210mm. Recessed housing using L1210.
<b>JER.5850.011</b>	Testata di chiusura per cassa forma. End cap for R. housing.
<b>JER.5850.010</b>	Giunto per cassa forma. Linear joint for recessed housing.
<b>JER.CA</b>	Cavo anticaduta. Suspension cable.
<b>AAA.TRSL08</b>	LED Driver IP20 30W 24VDC.
<b>AAA.TRSL09</b>	LED Driver IP20 75W 24VDC.
<b>AAA.TRSL13</b>	LED Driver IP67 70W 24VDC.
<b>AAA.TRSL16</b>	LED Driver IP67 150W 24VDC.