

F.

IP67

IK07

Kos

DOWNLIGHT
White led



Collection name

KOS 1

KOS 2

KOS 3

Technical data

Power (Real data)	9.5 W	9.5 W	9.5 W
Lumen 3000K (Real data)	941 lm (Optic .01)	941 lm (Optic .01)	941 lm (Optic .01)
Lumen 4000K (Real data)	1033 lm (Optic .01)	1033 lm (Optic .01)	1033 lm (Optic .01)
Class	I	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included	Included

Configuration code

Select finish / led / optic

20501 + X + Y + Z

20523 + X + Y + Z

20545 + X + Y + Z

Finish X

- 2 - White (RAL 9010)
- 3 - Black (RAL 9005)

- 2 - White (RAL 9010)
- 3 - Black (RAL 9005)
- 6 - Inox Aisi 316L

- 2 - White (RAL 9010)
- 4 - Grey (RAL 9006)

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80




Optic Z

- .01 - 10° Spot
- .36 - 25° Medium
- .37 - 20°x115° Elliptical
- .34 - 65° Wide

- .01 - 10° Spot
- .36 - 25° Medium
- .37 - 20°x115° Elliptical
- .34 - 65° Wide

- .01 - 10° Spot
- .36 - 25° Medium
- .37 - 20°x115° Elliptical
- .34 - 65° Wide

Technical drawing

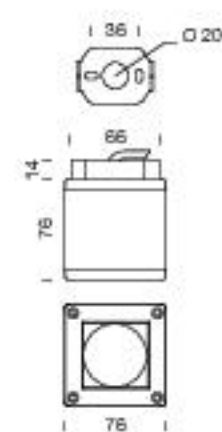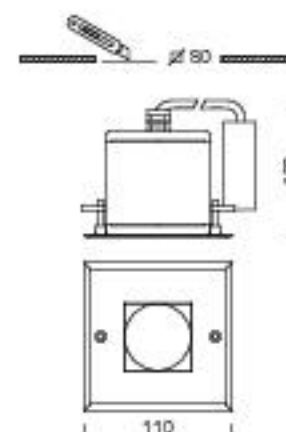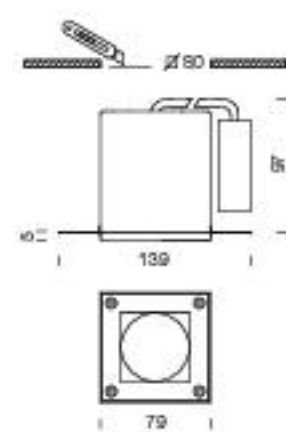

GU10 version available
on request