

F.

IP65

IK08

Mok

DOWNLIGHT
Comfort concentrated



Collection name

MINI MOK 1

MOK 2

Technical data

	MINI MOK 1	MOK 2
Power (Real data)	9.0 W	18.0 W
Lumen 3000K (Real data)	1131 lm (Optic .11)	1161 lm (Optic .11)
Lumen 4000K (Real data)	1168 lm (Optic .11)	2037 lm (Optic .11)
Class	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included

Configuration code

Select finish / led / optic

22001 + X + Y + Z

22022 + X + Y + Z

Finish X

- 2 - White (RAL 9010)
- 4 - Grey (RAL 9006)

- 2 - White (RAL 9010)
- 4 - Grey (RAL 9006)

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80



- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

Optic Z

- .11 - 12° Spot
- .12 - 24° Medium
- .13 - 38° Medium

- .11 - 12° Spot
- .12 - 24° Medium
- .13 - 38° Medium

Technical drawing

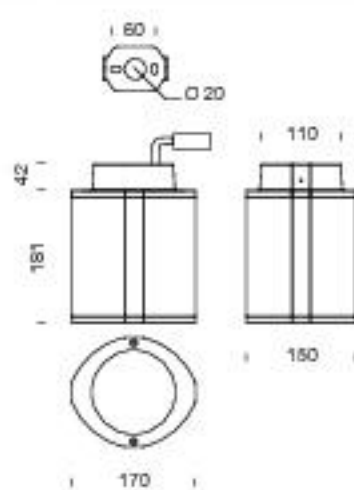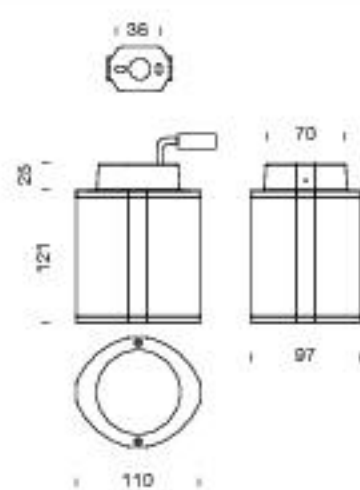

GU10 version available
on request