

# F.

IP66

IK08

# Slim

FLOODLIGHT  
White & RGB led



## Collection name

SLIM

SLIM

SLIM

## Technical data

Power (Real data)	34.0 W	22.0 W	27.0 W
Lumen 3000K (Real data)	3956 lm (Optic .27)	3317 lm (Optic .01)	—
Lumen 4000K (Real data)	4090lm (Optic .27)	3469 lm (Optic .01)	—
Class	I	I	III
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	24V DC PWM
Power supply	Included	Included	See bottom page

## Configuration code

### Select finish / led / optic

40901 + X + Y + Z

40902 + X + Y + Z

40903 + X + Y + Z

Finish X

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .6 - RGB




Optic Z

- .27 - Symmetric
- .06 - Asymmetric

- .01 - 10° Spot
- .36 - 25° Medium
- .32 - 45° Wide
- .37 - 20°x115° Elliptical
- .07 - Wall washer

- .12 - 24° Medium

## Technical drawing

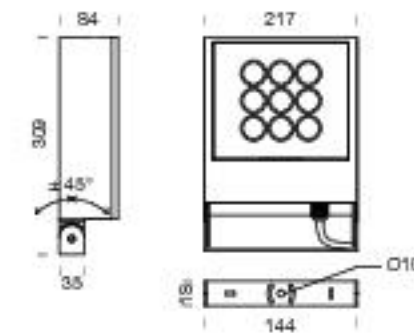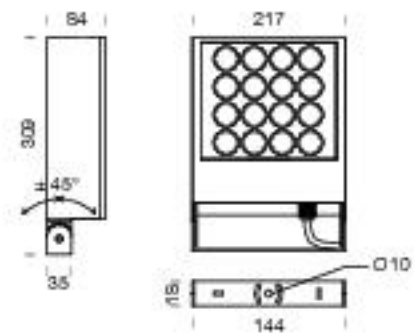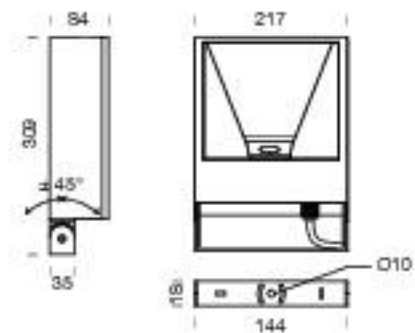

## Accessories

Schema collegamenti  
Installation scheme  
Schéma d'installation

pag. 300

### RGB POWER SUPPLIES

#### MASTER (24V in - 24V out)

##### BLUETOOTH / PUSH

C007 240W (60W/ch) 88x54x26 mm IP20

##### DMX / PUSH / 0-10 (DIN rail 4m)

C100 360W (120W/ch) 72x92x62 mm IP20

#### DRIVER (220/240V in - 24V out)

D020 240W max. 244x68x39 mm IP67

D024 320W max. 252x90x44 mm IP67