

F.

IP66

IK08

Aster

FLOODLIGHT
White & RGB led



Collection name

ASTER

ASTER

ASTER

ASTER

Technical data

Power (Real data)	18.0 W	18.0 W	18.0 W	18.0 W
Lumen 3000K (Real data)	1975 lm (Optic .11)	2075lm (Optic .27)	2102lm (Optic .07)	—
Lumen 4000K (Real data)	2037 lm (Optic .11)	2140 lm (Optic .27)	2167 lm (Optic .07)	—
Class	I	I	I	III
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	24V DC PWM
Power supply	Included	Included	Included	See bottom page

Configuration code

Select finish / led / optic

41601 + X + Y + Z

41604 + X + Y + Z

41605 + X + Y + Z

41602 + X + Y + Z

Finish X

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .6 - RGB

Optic Z





- .11 - 12° Spot
- .12 - 24° Medium
- .13 - 38° Medium

- .27 - Symmetric

- .07 - Wall washer

- .12 - 24° Medium

Technical drawing

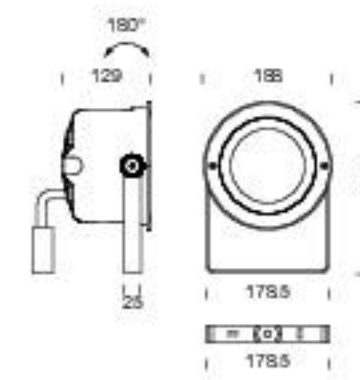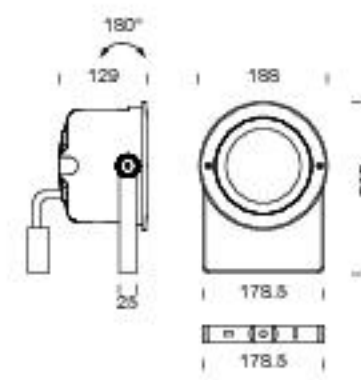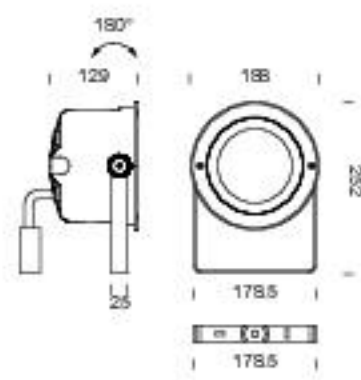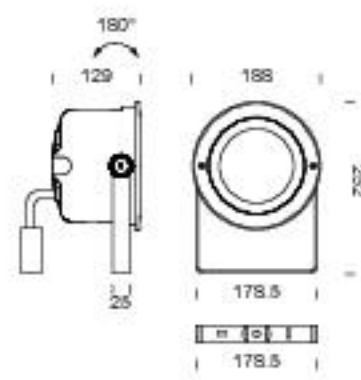

Accessories

Schema collegamenti
Installation scheme
Schéma d'installation

pag. 300

MASTER (24V in - 24V out)

BLUETOOTH / PUSH

C007 240W (60W/ch) 88x54x26 mm IP20

DMX / PUSH / 0-10 (DIN rail 4m)

C100 360W (120W/ch) 72x92x62 mm IP20

RGB POWER SUPPLIES

DRIVER (220/240V in - 24V out)

D020 240W max. 244x68x39 mm IP67

D024 320W max. 252x90x44 mm IP67