

F.

IP65

IK07

Pin

SQUARE BOLLARD
1 Opening



Collection name

PIN 245 mm

PIN 605 mm

PIN 1200 mm

PIN 2400 mm

Technical data

Power (Real data)	4.5 W	4.5 W	12.5 W	12.5 W
Lumen 3000K (Real data)	307 lm (Optic .14)	307 lm (Optic .14)	905 lm (Optic .14)	905 lm (Optic .14)
Lumen 4000K (Real data)	335 lm (Optic .14)	335 lm (Optic .14)	938 lm (Optic .14)	938 lm (Optic .14)
Class	I	I	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included	Included	Included
Openings	1 opening	1 opening	1 opening	1 opening

Configuration code

Select finish / led / optic

61001 + X + Y + Z

61025 + X + Y + Z

61037 + X + Y + Z

61042 + X + Y + Z

Finish **X**

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED **Y**

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

Optic **Z**





- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

Technical drawing

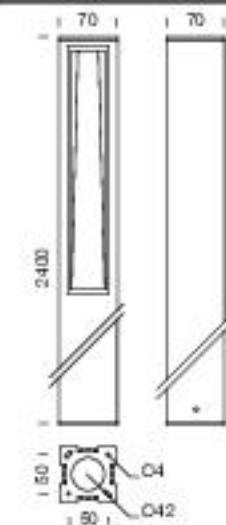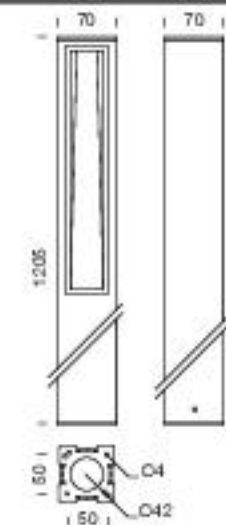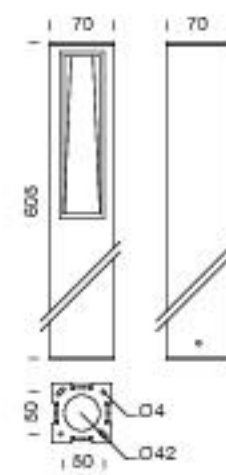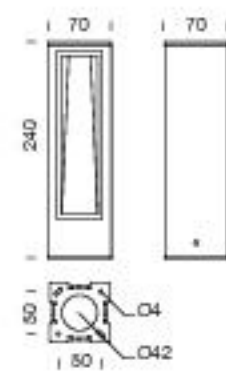

Isolux diagrams

