

# Pin

SQUARE BOLLARD  
2 Openings

IP65

IK07



**Collection name**

**PIN 245 mm**

**PIN 605 mm**

**PIN 1200 mm**

**PIN 2400 mm**

**Technical data**

Power (Real data)	4.5 W	4.5 W	12.5 W	12.5 W
Lumen 3000K (Real data)	252 lm (Optic .14)	252 lm (Optic .14)	1148 lm (Optic .14)	1148 lm (Optic .14)
Lumen 4000K (Real data)	276 lm (Optic .14)	276 lm (Optic .14)	1149 lm (Optic .14)	1149 lm (Optic .14)
Class	I	I	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included	Included	Included
Openings	2 openings	2 openings	2 openings	2 openings

**Configuration code**

Select finish / led / optic

61002 + X + Y + Z

61026 + X + Y + Z

61038 + X + Y + Z

61043 + X + Y + Z

Finish X

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

Optic Z





- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

**Technical drawing**

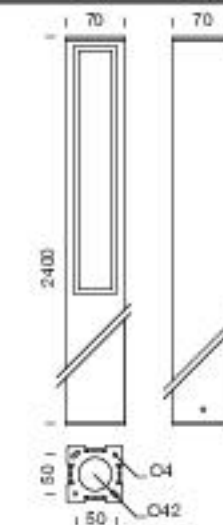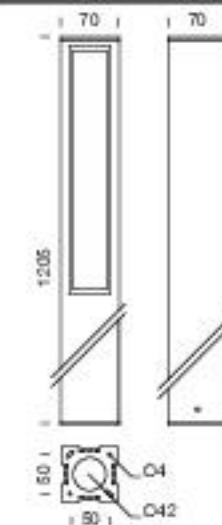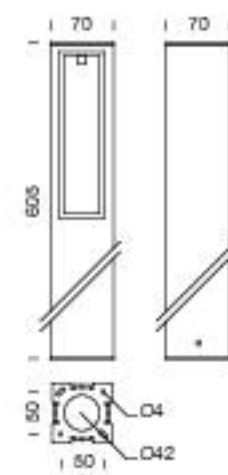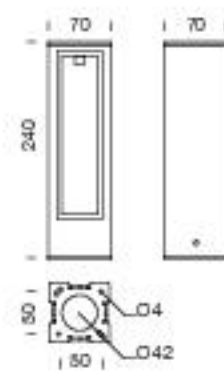

**Isolux diagrams**

