

F.

IP66

IK10

Uop

BOLLARD
White led



Collection name

UOP 114 mm

UOP 400 mm

Technical data

Power (Real data)	2.2 W
Lumen 3000K (Real data)	63 lm (Optic .14)
Lumen 4000K (Real data)	66 lm (Optic .14)
Class	I
Nominal Voltage	220-240V 50/60Hz
Power supply	Included

Power (Real data)	2.2 W
Lumen 3000K (Real data)	63 lm (Optic .14)
Lumen 4000K (Real data)	66 lm (Optic .14)
Class	I
Nominal Voltage	220-240V 50/60Hz
Power supply	Included

Configuration code

Select finish / led / optic

60201 + X + Y + Z

60203 + X + Y + Z

Finish

4 - Grey (RAL 9006)

4 - Grey (RAL 9006)

Color LED

.2 - 2700K CRI > 80

.2 - 2700K CRI > 80

.3 - 3000K CRI > 80

.3 - 3000K CRI > 80

.4 - 4000K CRI > 80



.4 - 4000K CRI > 80

Optic

.14 - Transparent

.14 - Transparent

Technical drawing

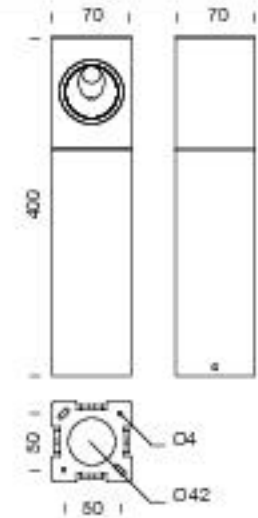

Isolux diagrams

