

F.

Mini Mok

IP65

IK09

BOLLARD
White led



Collection name

MINI MOK 280 mm

MINI MOK 805 mm

MINI MOK 1200 mm

Technical data

	MINI MOK 280 mm	MINI MOK 805 mm	MINI MOK 1200 mm
Power (Real data)	10.0 W	15.0 W	15.0 W
Lumen 3000K (Real data)	654 lm (Optic .14)	981 lm (Optic .14)	981 lm (Optic .14)
Lumen 4000K (Real data)	668 lm (Optic .14)	1002 lm (Optic .14)	1002 lm (Optic .14)
Class	I	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included	Included

Configuration code

Select finish / led / optic

61801 + X + Y + Z

61835 + X + Y + Z

61847 + X + Y + Z

Finish

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80




Optic

- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

Technical drawing

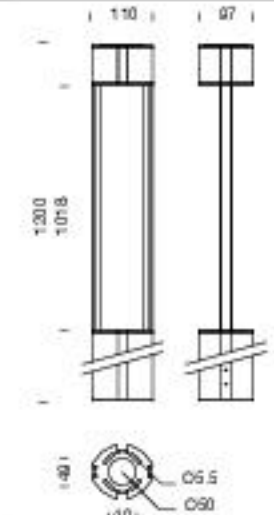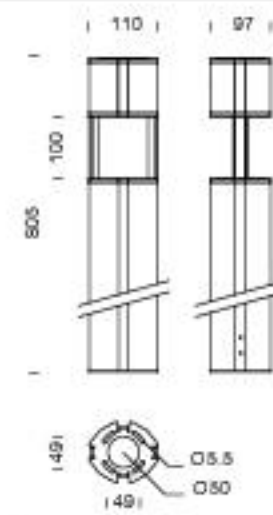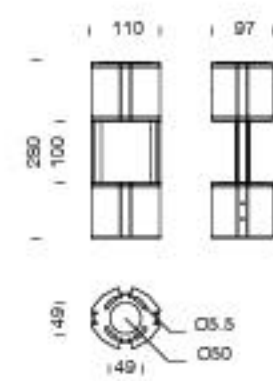

Isolux diagrams

