

# F.

IP65

IK09

# Mok

BOLLARD  
White led



## Collection name

**MOK 585 mm**

**MOK 840 mm**

**MOK 1065 mm**

## Technical data

Power (Real data)	15.0 W	20.0 W	20.0 W
Lumen 3000K (Real data)	985 lm (Optic .14)	1313 lm (Optic .14)	1358 lm (Optic .14)
Lumen 4000K (Real data)	1006 lm (Optic .14)	1341 lm (Optic .14)	1400 lm (Optic .14)
Class	I	I	I
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	220-240V 50/60Hz
Power supply	Included	Included	Included

## Configuration code

### Select finish / led / optic

**62012** + X + Y + Z

**62033** + X + Y + Z

**62044** + X + Y + Z

Finish **X**

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED **Y**

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80




Optic **Z**

- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

## Technical drawing

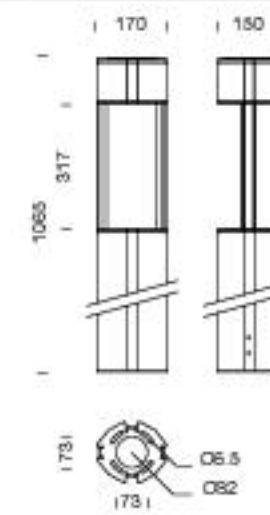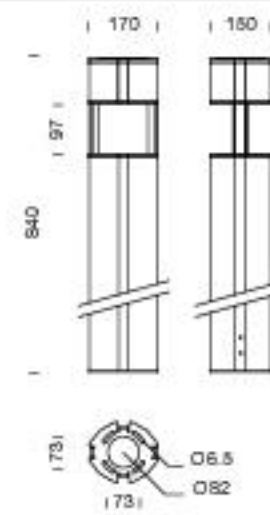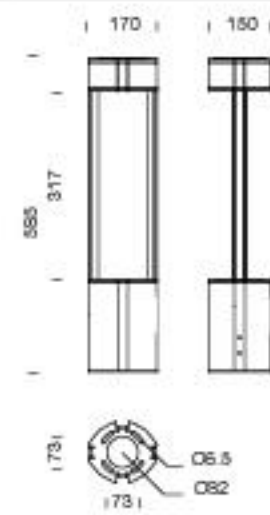

## Isolux diagrams

