

Step

BOLLARD
h. 805 mm

IP65

IK09



Collection name

STEP 805 mm

STEP 805 mm

STEP 805 mm

Technical data

Power (Real data)	24.0 W
Lumen 3000K (Real data)	285 lm (Optic .14)
Lumen 4000K (Real data)	310 lm (Optic .14)
Class	I
Nominal Voltage	220-240V 50/60Hz
Power supply	Included
Openings	1 opening

Power (Real data)	24.0 W
Lumen 3000K (Real data)	675 lm (Optic .14)
Lumen 4000K (Real data)	734 lm (Optic .14)
Class	I
Nominal Voltage	220-240V 50/60Hz
Power supply	Included
Openings	2 openings

Power (Real data)	24.0 W
Lumen 3000K (Real data)	954 lm (Optic .14)
Lumen 4000K (Real data)	1004 lm (Optic .14)
Class	I
Nominal Voltage	220-240V 50/60Hz
Power supply	Included
Openings	4 openings

Configuration code

Select finish / led / optic

61912 + X + Y + Z

61934 + X + Y + Z

61956 + X + Y + Z

Finish **X**

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 8 - Dark brown

Color LED **Y**

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80



Optic **Z**

- .14 - Transparent

- .14 - Transparent

- .14 - Transparent

Technical drawing

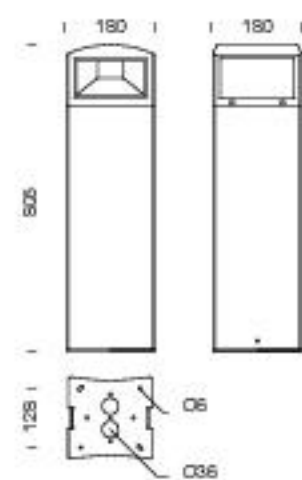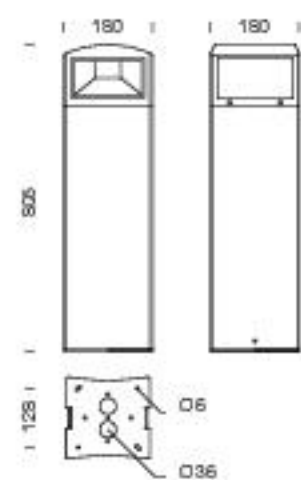

Isolux diagrams

