

Flea

RECESSED LIGHT
RGB+W - Tunable white led

IP67 IK10



Collection name

FLEA

FLEA

FLEA

FLEA

Technical data

Power (Real data)	4.0 W	4.0 W	4.0 W	4.0 W
Class	III	III	III	III
Nominal Voltage	max. 350mA	max. 350mA	max. 350mA	max. 350mA
Power supply	See bottom page	See bottom page	See bottom page	See bottom page
Max load	1500 kg (Walk over)	1500 kg (Walk over)	1500 kg (Walk over)	1500 kg (Walk over)

Configuration code

Select finish / led / optic

10130 + X + Y + Z

10130 + X + Y + Z

10131 + X + Y + Z

10131 + X + Y + Z

Finish X

- 5 - Anodized aluminium
- 6 - Inox Aisi 316L

- 9 - Total glass

- 5 - Anodized aluminium
- 6 - Inox Aisi 316L

- 9 - Total glass

Color LED Y

- .5 - RGB+W
- .7 - Tunable white

- .5 - RGB+W
- .7 - Tunable white

- .5 - RGB+W
- .7 - Tunable white

- .5 - RGB+W
- .7 - Tunable white

Optic Z





- .02 - 30° Medium
- .05 - Diffused

- .02 - 30° Medium
- .05 - Diffused

- .02 - 30° Medium
- .05 - Diffused

- .02 - 30° Medium
- .05 - Diffused

Technical drawing

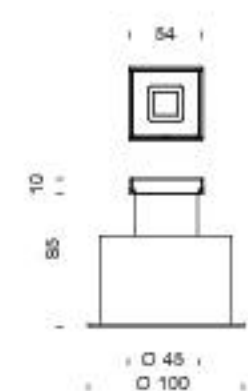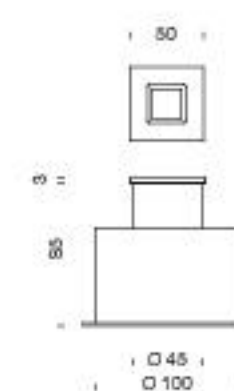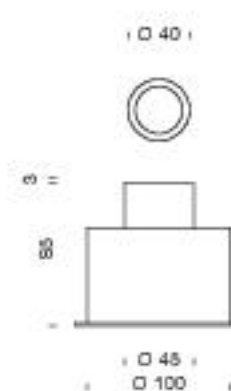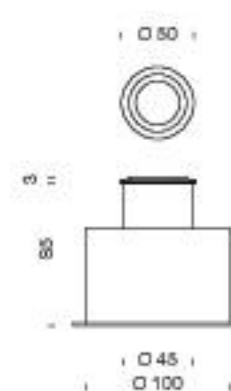

Accessories

Schema collegamenti
Installation scheme
Schéma d'installation

pag. 300

RGB+W & TUNEABLE WHITE POWER SUPPLIES

MASTER (24V in - 350mA out)

BLUETOOTH / PUSH

C005 28W (7W/ch) 88x54x26 mm IP20

DMX / PUSH / 0-10 (DIN rail 4m)

C020 60W (15W/ch) 72x92x62 mm IP20

DRIVER (220/240V in - 24V out)

D001 40W max. 150x53x35 mm IP67

D003 120W max. 191x63x38 mm IP67