

# Maxi Flea C

IP67 IK10

RECESSED LIGHT  
White led



**Collection name**

**MAXI FLEA C.**

**MAXI FLEA C.**

**MAXI FLEA C.**

**Technical data**

Power (Real data)	6.5 W	6.5 W	6.5 W
Lumen 3000K (Real data)	118 lm (Optic .05)	159 lm (Optic .05)	189 lm (Optic .05)
Lumen 4000K (Real data)	122 lm (Optic .05)	164 lm (Optic .05)	195 lm (Optic .05)
Class	III	III	III
Nominal Voltage	24V DC dimmable	24V DC dimmable	24V DC dimmable
Power supply	See bottom page	See bottom page	See bottom page
Max load	1500 kg (Walk over)	1500 kg (Walk over)	1500 kg (Walk over)
Openings	1 x 180°	2 x 120°	4 x 90°

**Configuration code**

**Select finish / led / optic**

**10176 + X + Y + Z**

**10177 + X + Y + Z**

**10178 + X + Y + Z**

Finish **X**

-  0 - Brass bronze effect
-  5 - Anodized aluminium
-  6 - Inox Aisi 316L


-  0 - Brass bronze effect
-  5 - Anodized aluminium
-  6 - Inox Aisi 316L

-  0 - Brass bronze effect
-  5 - Anodized aluminium
-  6 - Inox Aisi 316L


Color LED **Y**

-  .2 - 2700K CRI > 80
-  .3 - 3000K CRI > 80
-  .4 - 4000K CRI > 80

-  .2 - 2700K CRI > 80
-  .3 - 3000K CRI > 80
-  .4 - 4000K CRI > 80

-  .2 - 2700K CRI > 80
-  .3 - 3000K CRI > 80
-  .4 - 4000K CRI > 80




Optic **Z**

-  .05 - Diffused

-  .05 - Diffused

-  .05 - Diffused

**Technical drawing**

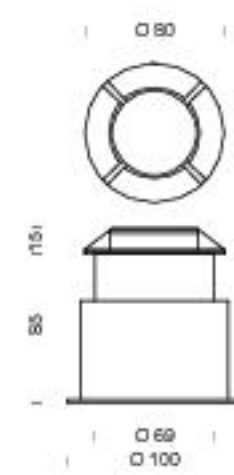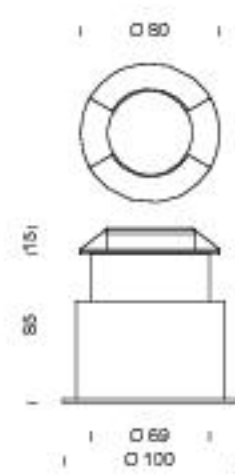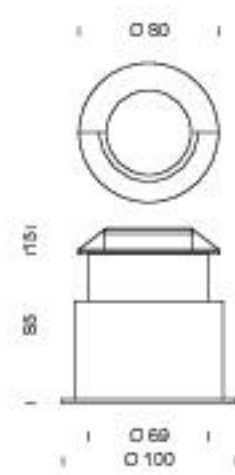

**Accessories**

Schema collegamenti  
Installation scheme  
Schéma d'installation  
  
pag. 300

MONOCHROMATIC LED POWER SUPPLIES

**MASTER (24V in - 24V out)**

0-10V / 1-10V / PUSH			
C219	192W max.	44x57x19 mm	IP20
DALI			
C224	156W max.	44x57x25 mm	IP10
BLUETOOTH			
C225	156W max.	44x57x25 mm	IP20

**DRIVER (220/240V in - 24V out)**

D000	20W max.	118x35x26 mm	IP67
D001	40W max.	150x53x35 mm	IP67
D002	60W max.	163x43x32 mm	IP67
D003	120W max.	191x63x38 mm	IP67
D010	185W max.	228x68x39 mm	IP67