

F.

IP67

IK08

Mini Round

RECESSED LIGHT
White & RGB led



Collection name

MINI ROUND

MINI ROUND

Technical data

Power (Real data)	9.0 W	3.0 W
Lumen 3000K (Real data)	1131 lm (Optic .11)	—
Lumen 4000K (Real data)	1168 lm (Optic .11)	—
Class	I	III
Nominal Voltage	220-240V 50/60Hz	24V DC PWM
Power supply	Included	See bottom page
Max load (Alu version)	1800 kg (Inox, walk over)	1800 kg (Inox, walk over)
Max load (Inox version)	2600 kg (Inox, drive over)	2600 kg (Inox, drive over)

Configuration code

Select finish / led / optic

10701 + X + Y + Z

10702 + X + Y + Z

Finish X

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 6 - Inox Aisi 316L

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 6 - Inox Aisi 316L

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80



- .6 - RGB

Optic Z

- .05 - Diffused
- .11 - 12° Spot
- .12 - 24° Medium
- .13 - 38° Medium
- .07 - Wall washer

- .05 - Diffused
- .12 - 24° Medium

Technical drawing

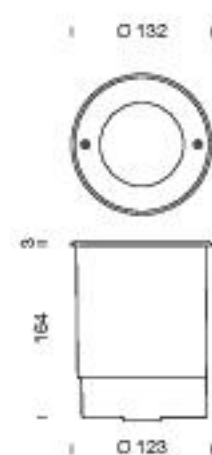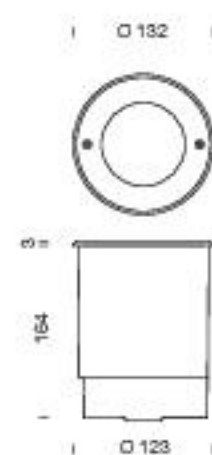

Accessories

Schema collegamenti
Installation scheme
Schéma d'installation

pag. 300

GU10 version available on request

RGB POWER SUPPLIES

MASTER (24V in - 24V out)

BLUETOOTH / PUSH

C007 240W (60W/ch) 88x54x26 mm IP20

DMX / PUSH / 0-10 (DIN rail 4m)

C100 360W (120W/ch) 72x92x62 mm IP20

DRIVER (220/240V in - 24V out)

D020 240W max. 244x68x39 mm IP67

D024 320W max. 252x90x44 mm IP67