

# F.

# Maxi Round

IP67

IK10

IK09

RECESSED LIGHT  
White & RGB led



## Collection name

MAXI ROUND

MAXI ROUND

MAXI ROUND

## Technical data

Power (Real data)	22.0 W	34.0 W	27.0 W
Lumen 3000K (Real data)	3317 lm (Optic .01)	5032 lm (Optic .27)	—
Lumen 4000K (Real data)	3469 lm (Optic .01)	5203 lm (Optic .27)	—
Class	I	I	III
Nominal Voltage	220-240V 50/60Hz	220-240V 50/60Hz	24V DC dimmable
Power supply	Included	Included	See bottom page
Max load (Alu version)	1800 kg (Inox, walk over)	1800 kg (Inox, walk over)	1800 kg (Inox, walk over)
Max load (Inox version)	2600 kg (Inox, drive over)	2600 kg (Inox, drive over)	2600 kg (Inox, drive over)

## Configuration code

### Select finish / led / optic

10768 + X + Y + Z

10772 + X + Y + Z

10769 + X + Y + Z

Finish X

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 6 - Inox Aisi 316L

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 6 - Inox Aisi 316L

- 1 - Anthracite gloss 8-10
- 4 - Grey (RAL 9006)
- 6 - Inox Aisi 316L

Color LED Y

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .2 - 2700K CRI > 80
- .3 - 3000K CRI > 80
- .4 - 4000K CRI > 80

- .6 - RGB




Optic Z

- .01 - 10° Spot
- .36 - 25° Medium
- .32 - 45° Wide
- .38 - 10°x40° Elliptical
- .07 - Wall washer

- .27 - Symmetric
- .07 - Wall washer

- .05 - Diffused
- .12 - 24° Medium

## Technical drawing

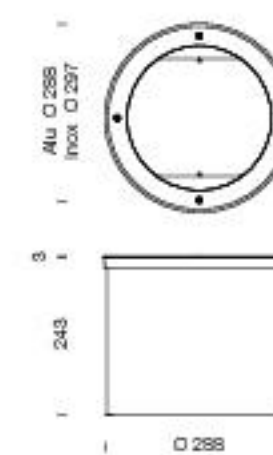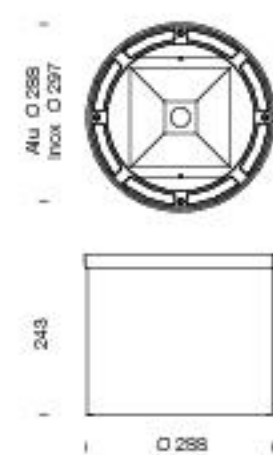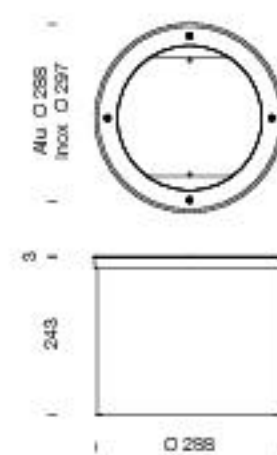

## Accessories

Schema collegamenti  
Installation scheme  
Schéma d'installation

pag. 300

## RGB POWER SUPPLIES

### MASTER (24V in - 24V out)

#### BLUETOOTH / PUSH

C007 240W (60W/ch) 88x54x26 mm IP20

#### DMX / PUSH / 0-10 (DIN rail 4m)

C100 360W (120W/ch) 72x92x62 mm IP20

### DRIVER (220/240V in - 24V out)

D020 240W max. 244x68x39 mm IP67

D024 320W max. 252x90x44 mm IP67