


POINT EVO 0A MAGNETIC TRACK ADAPTER

IP40 - Classe III - CE / F



	3000K	4000K
	26801.--.31	26801.--.41
	6W LED 1100 lm CRI ≥ 90 19° ^ 48V DC alimentatore elettronico incluso <i>electronic driver included</i>	

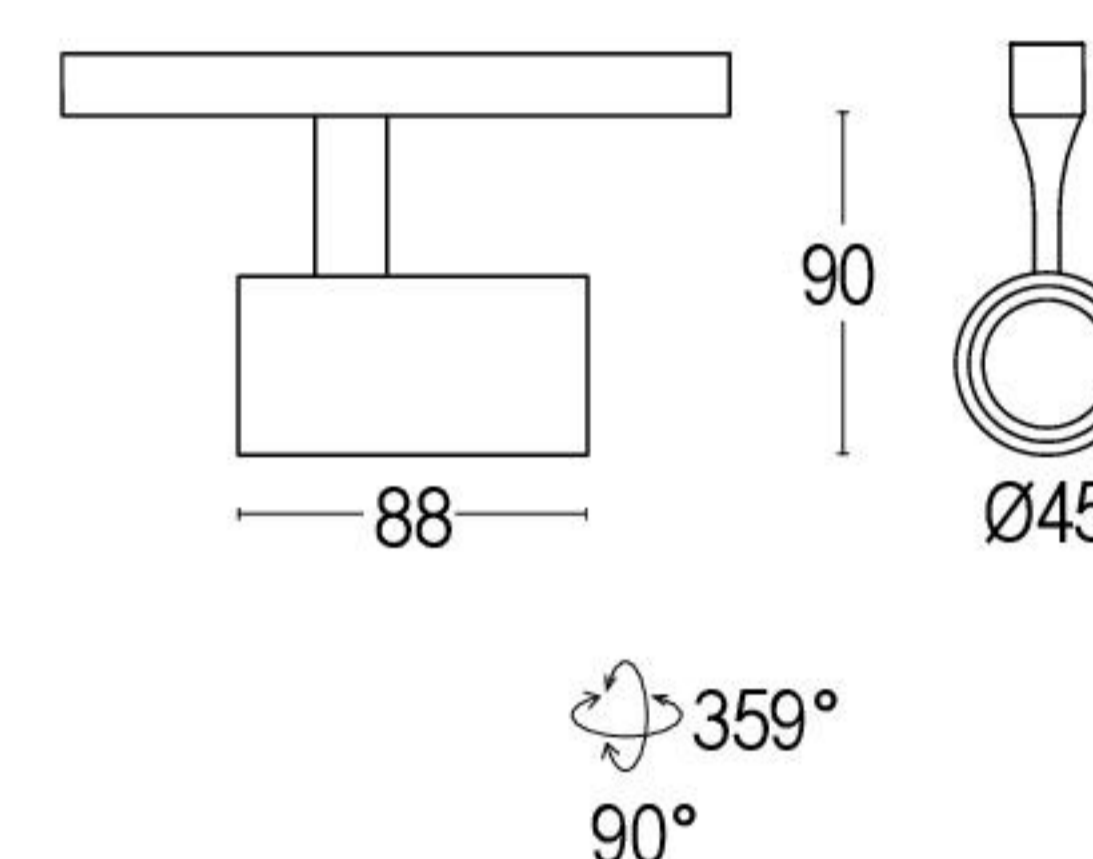

	3000K	4000K
	26802.--.31	26802.--.41
	6W LED 1100 lm CRI ≥ 90 47° ^ 48V DC alimentatore elettronico incluso <i>electronic driver included</i>	

ACCESSORI / ACCESSORIES



26880.00

Schermo antiabbagliamento
Anti glare screen



p. 392

Compatibile con binari Stucchi
Stucchi compatible track



26884.79

Diffusore acidato
Acid diffuser



26882.00

Diffusore ellissoidale
Elliptical diffuser

Colore standard 1 settimana
Standard color 1 week

○ **.01** Bianco
White (matt)

Colore su richiesta 2 settimane
Upon request color 2 weeks

● **.19** Grigio argento
Silver grey (matt)
● **.22** Nero
Black (matt)
● **.45** Ruggine
Rust

Colore speciale su richiesta 4/6 settimane
Upon request color 4/6 weeks

● **.27** Nero - oro
Black - gold
● **.25** Bianco - oro
White - gold
● **.72** Nero - rosso
Black - red
● **.71** Bianco - rosso
White - red