

nest


DIFFUSE

8W




### TECHNICAL SPECIFICATIONS

	DIFFUSE • Ø 170 MM	DIFFUSE • Ø 235 MM
Source lamp	LED 8 W	LED 8 W
Total wattage	8 W	8 W
Voltage	220-240 Vac, 50-60Hz	220-240 Vac, 50-60Hz
Control	On/Off	On/Off
Light colour	3000 K	3000 K
Luminous flux *Source flux	175 lm (640 lm*)	190 lm (640 lm*)
Luminous efficacy	22 lm/W	24 lm/W
McADAM steps	3	3
Beam	Diffuse	Diffuse
CRI	> 90	> 90
Life time	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
Energy efficiency class	A++	A++
IP rating	IP 65	IP 65
IK rating	IK 08	IK 08
Insulation class	I	I

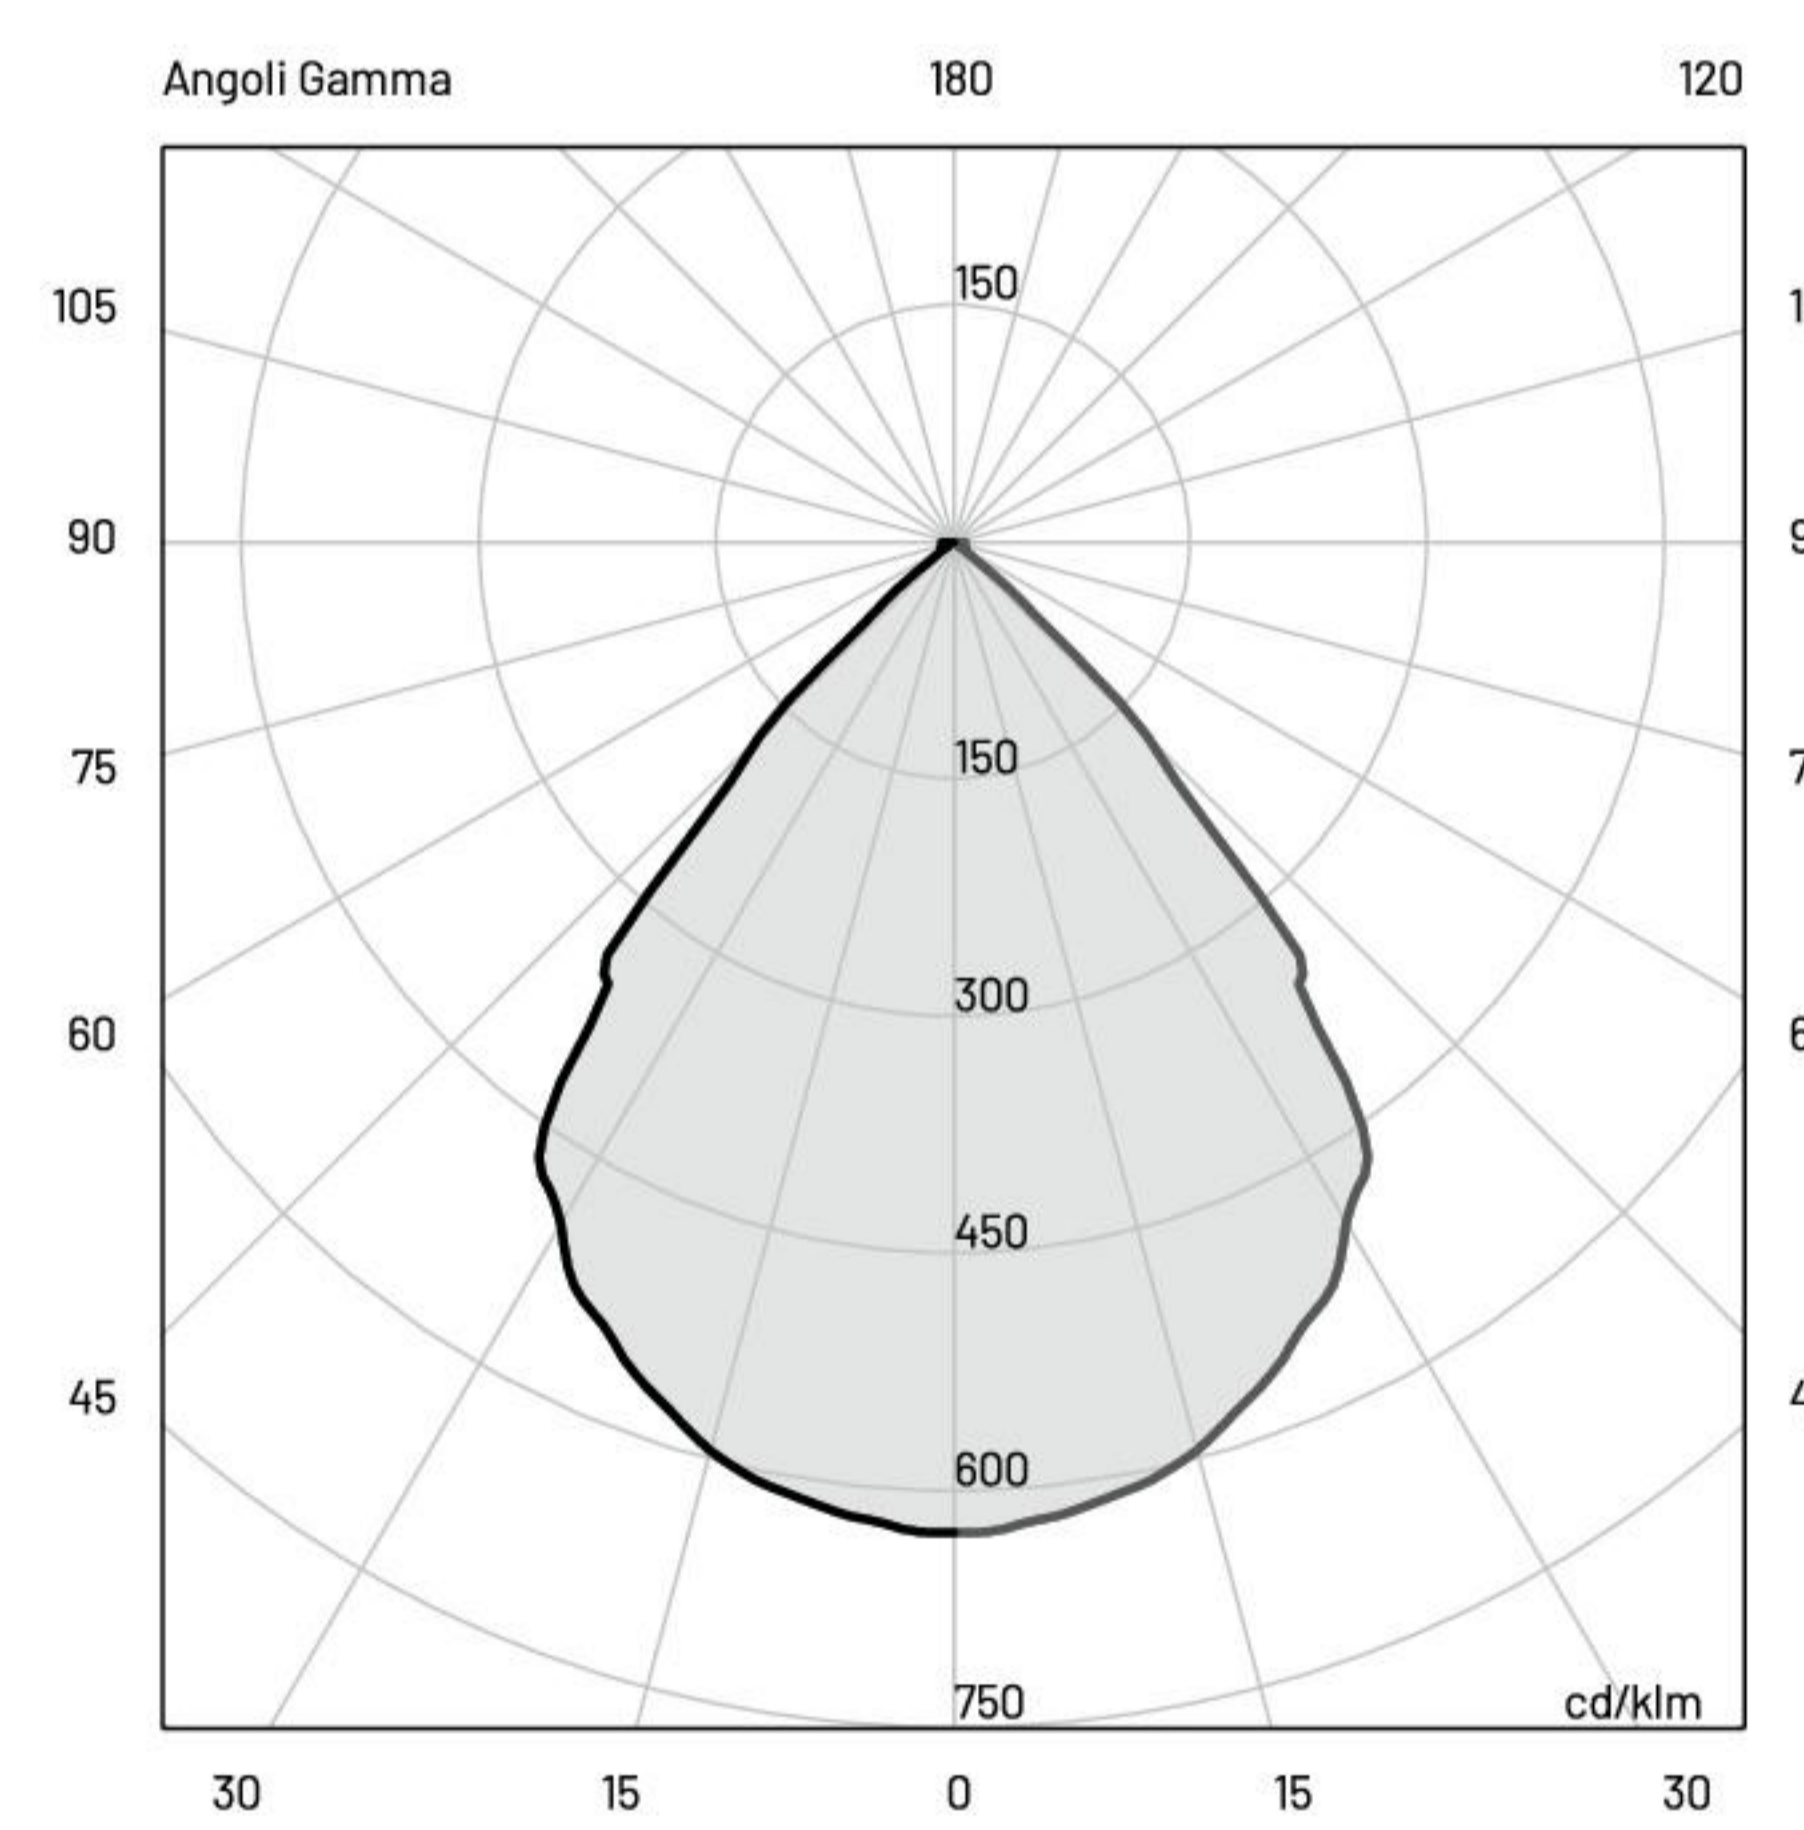

E (LUX)		
H (m)	lux (3000 K)	Ø (m)
1.00	122	0.86
2.00	30	1.71
3.00	14	2.57
4.00	8	3.43
5.00	5	4.28

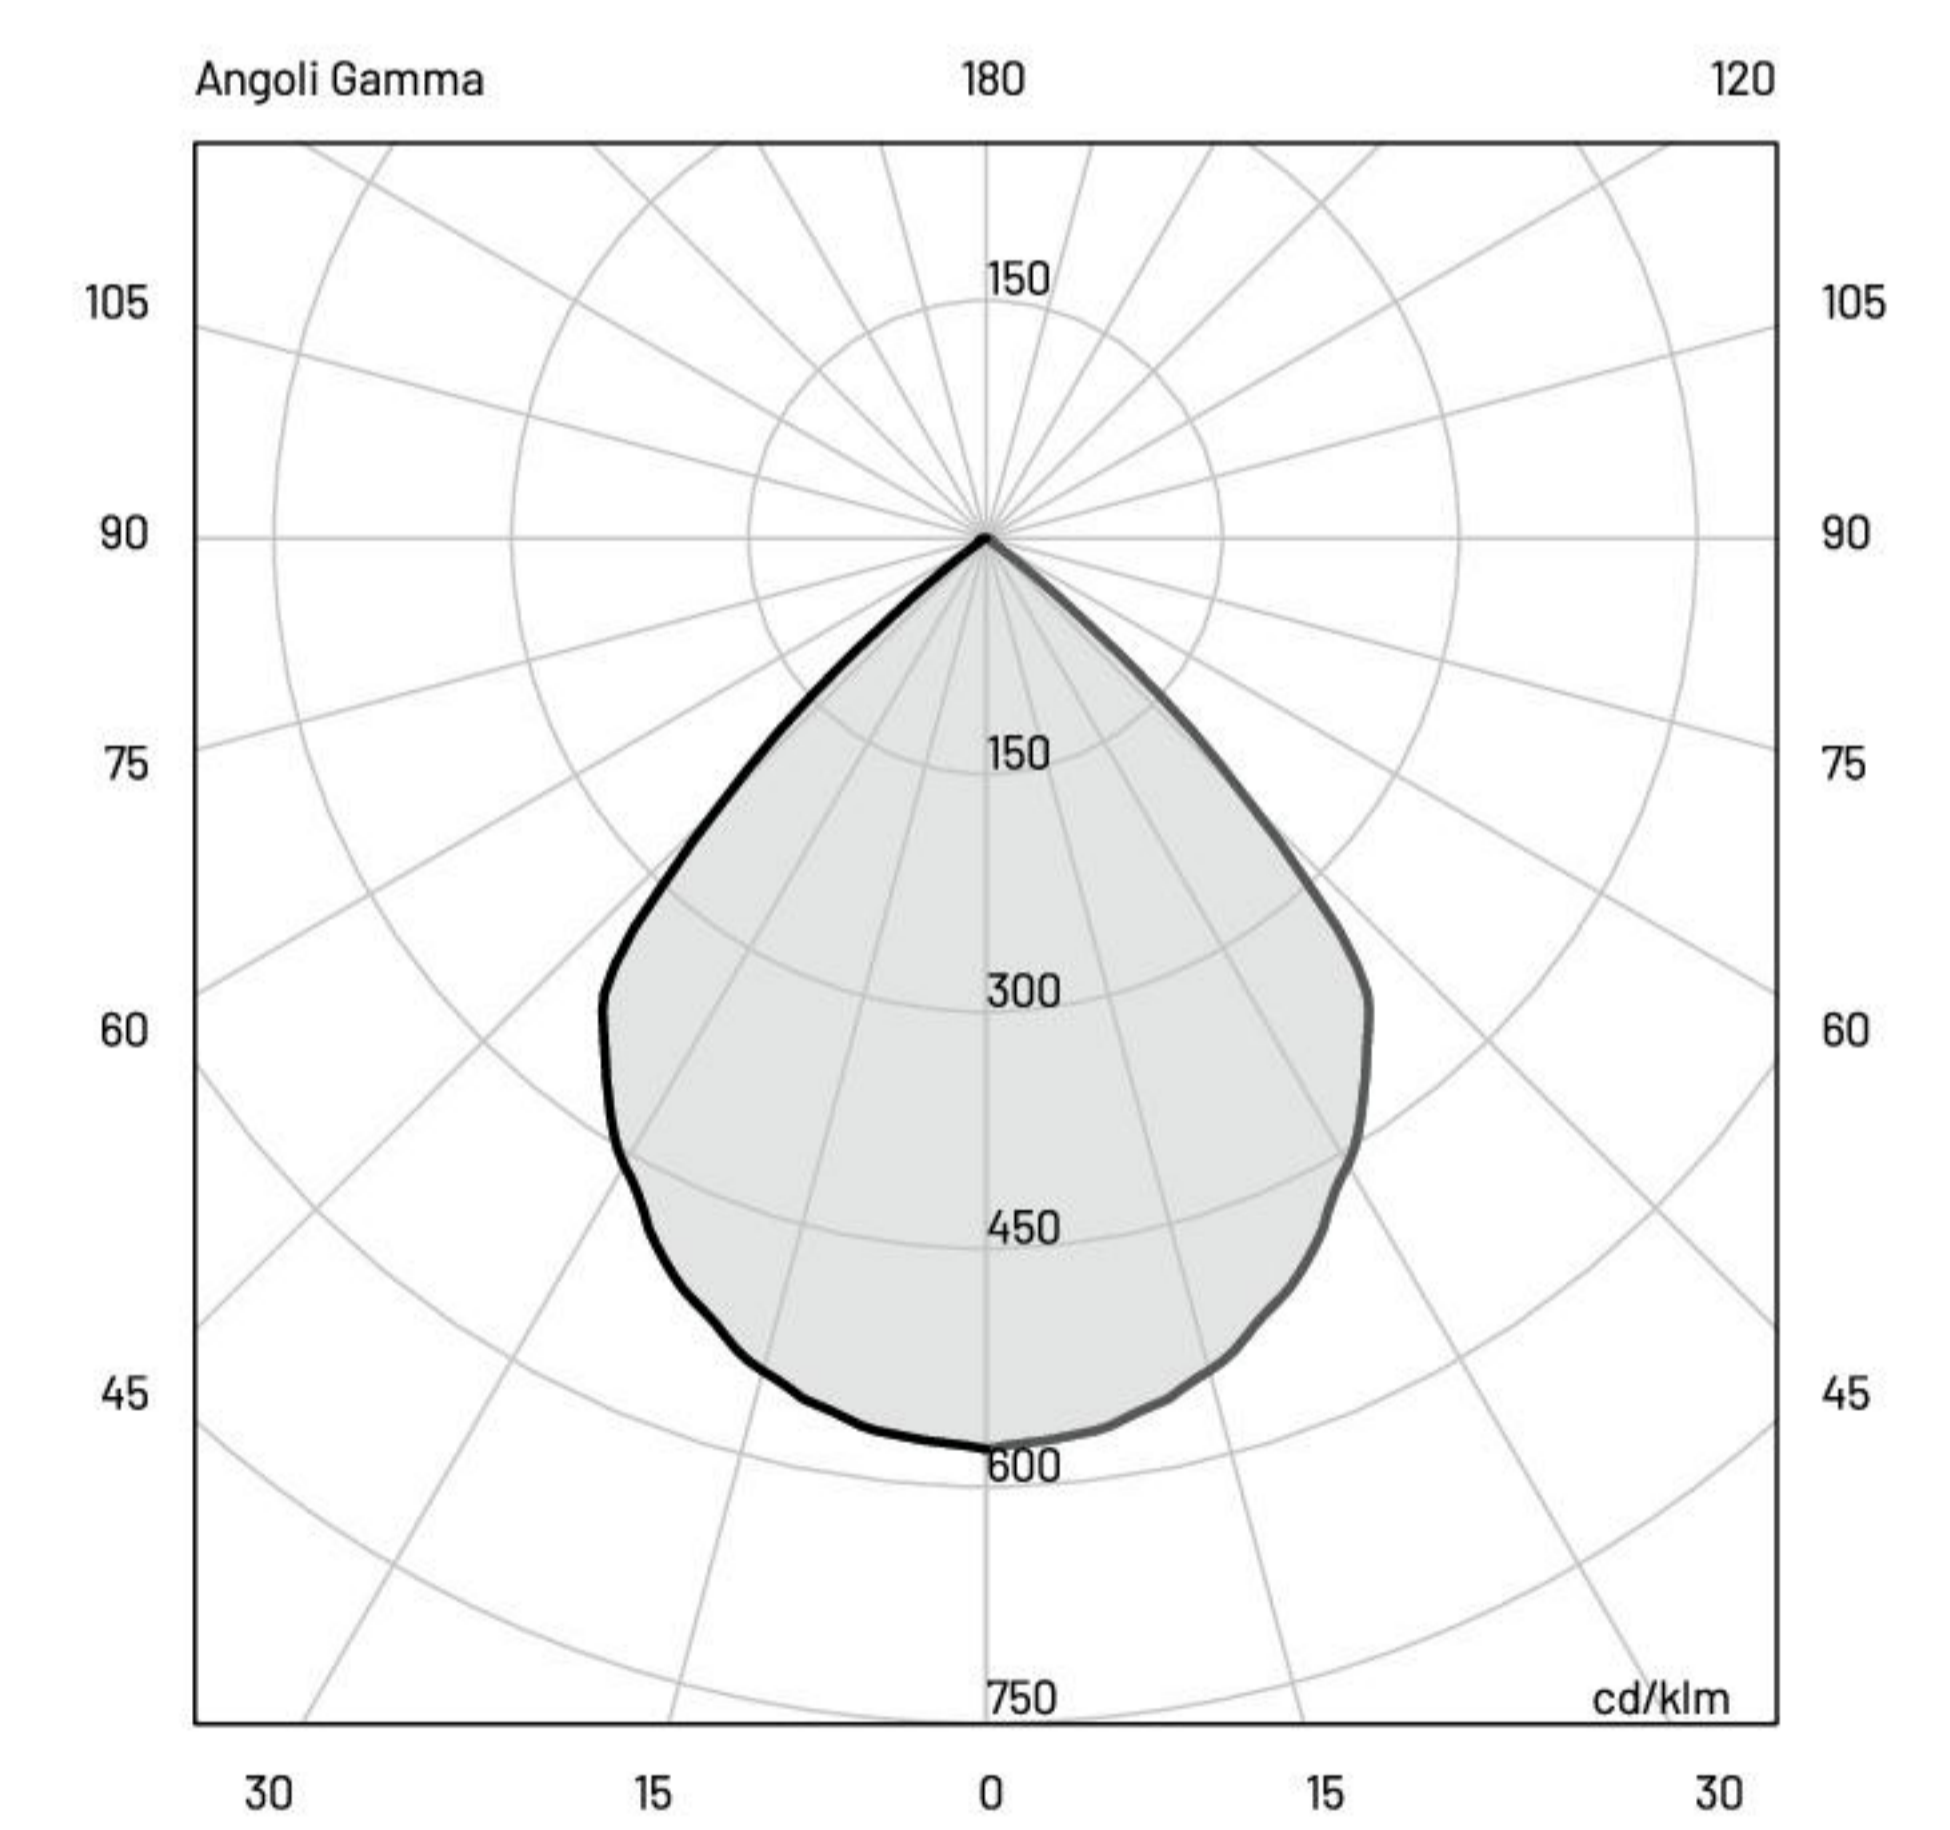

E (LUX)		
H (m)	lux (3000 K)	Ø (m)
1.00	122	0.94
2.00	30	1.89
3.00	14	2.83
4.00	8	3.78
5.00	5	4.72