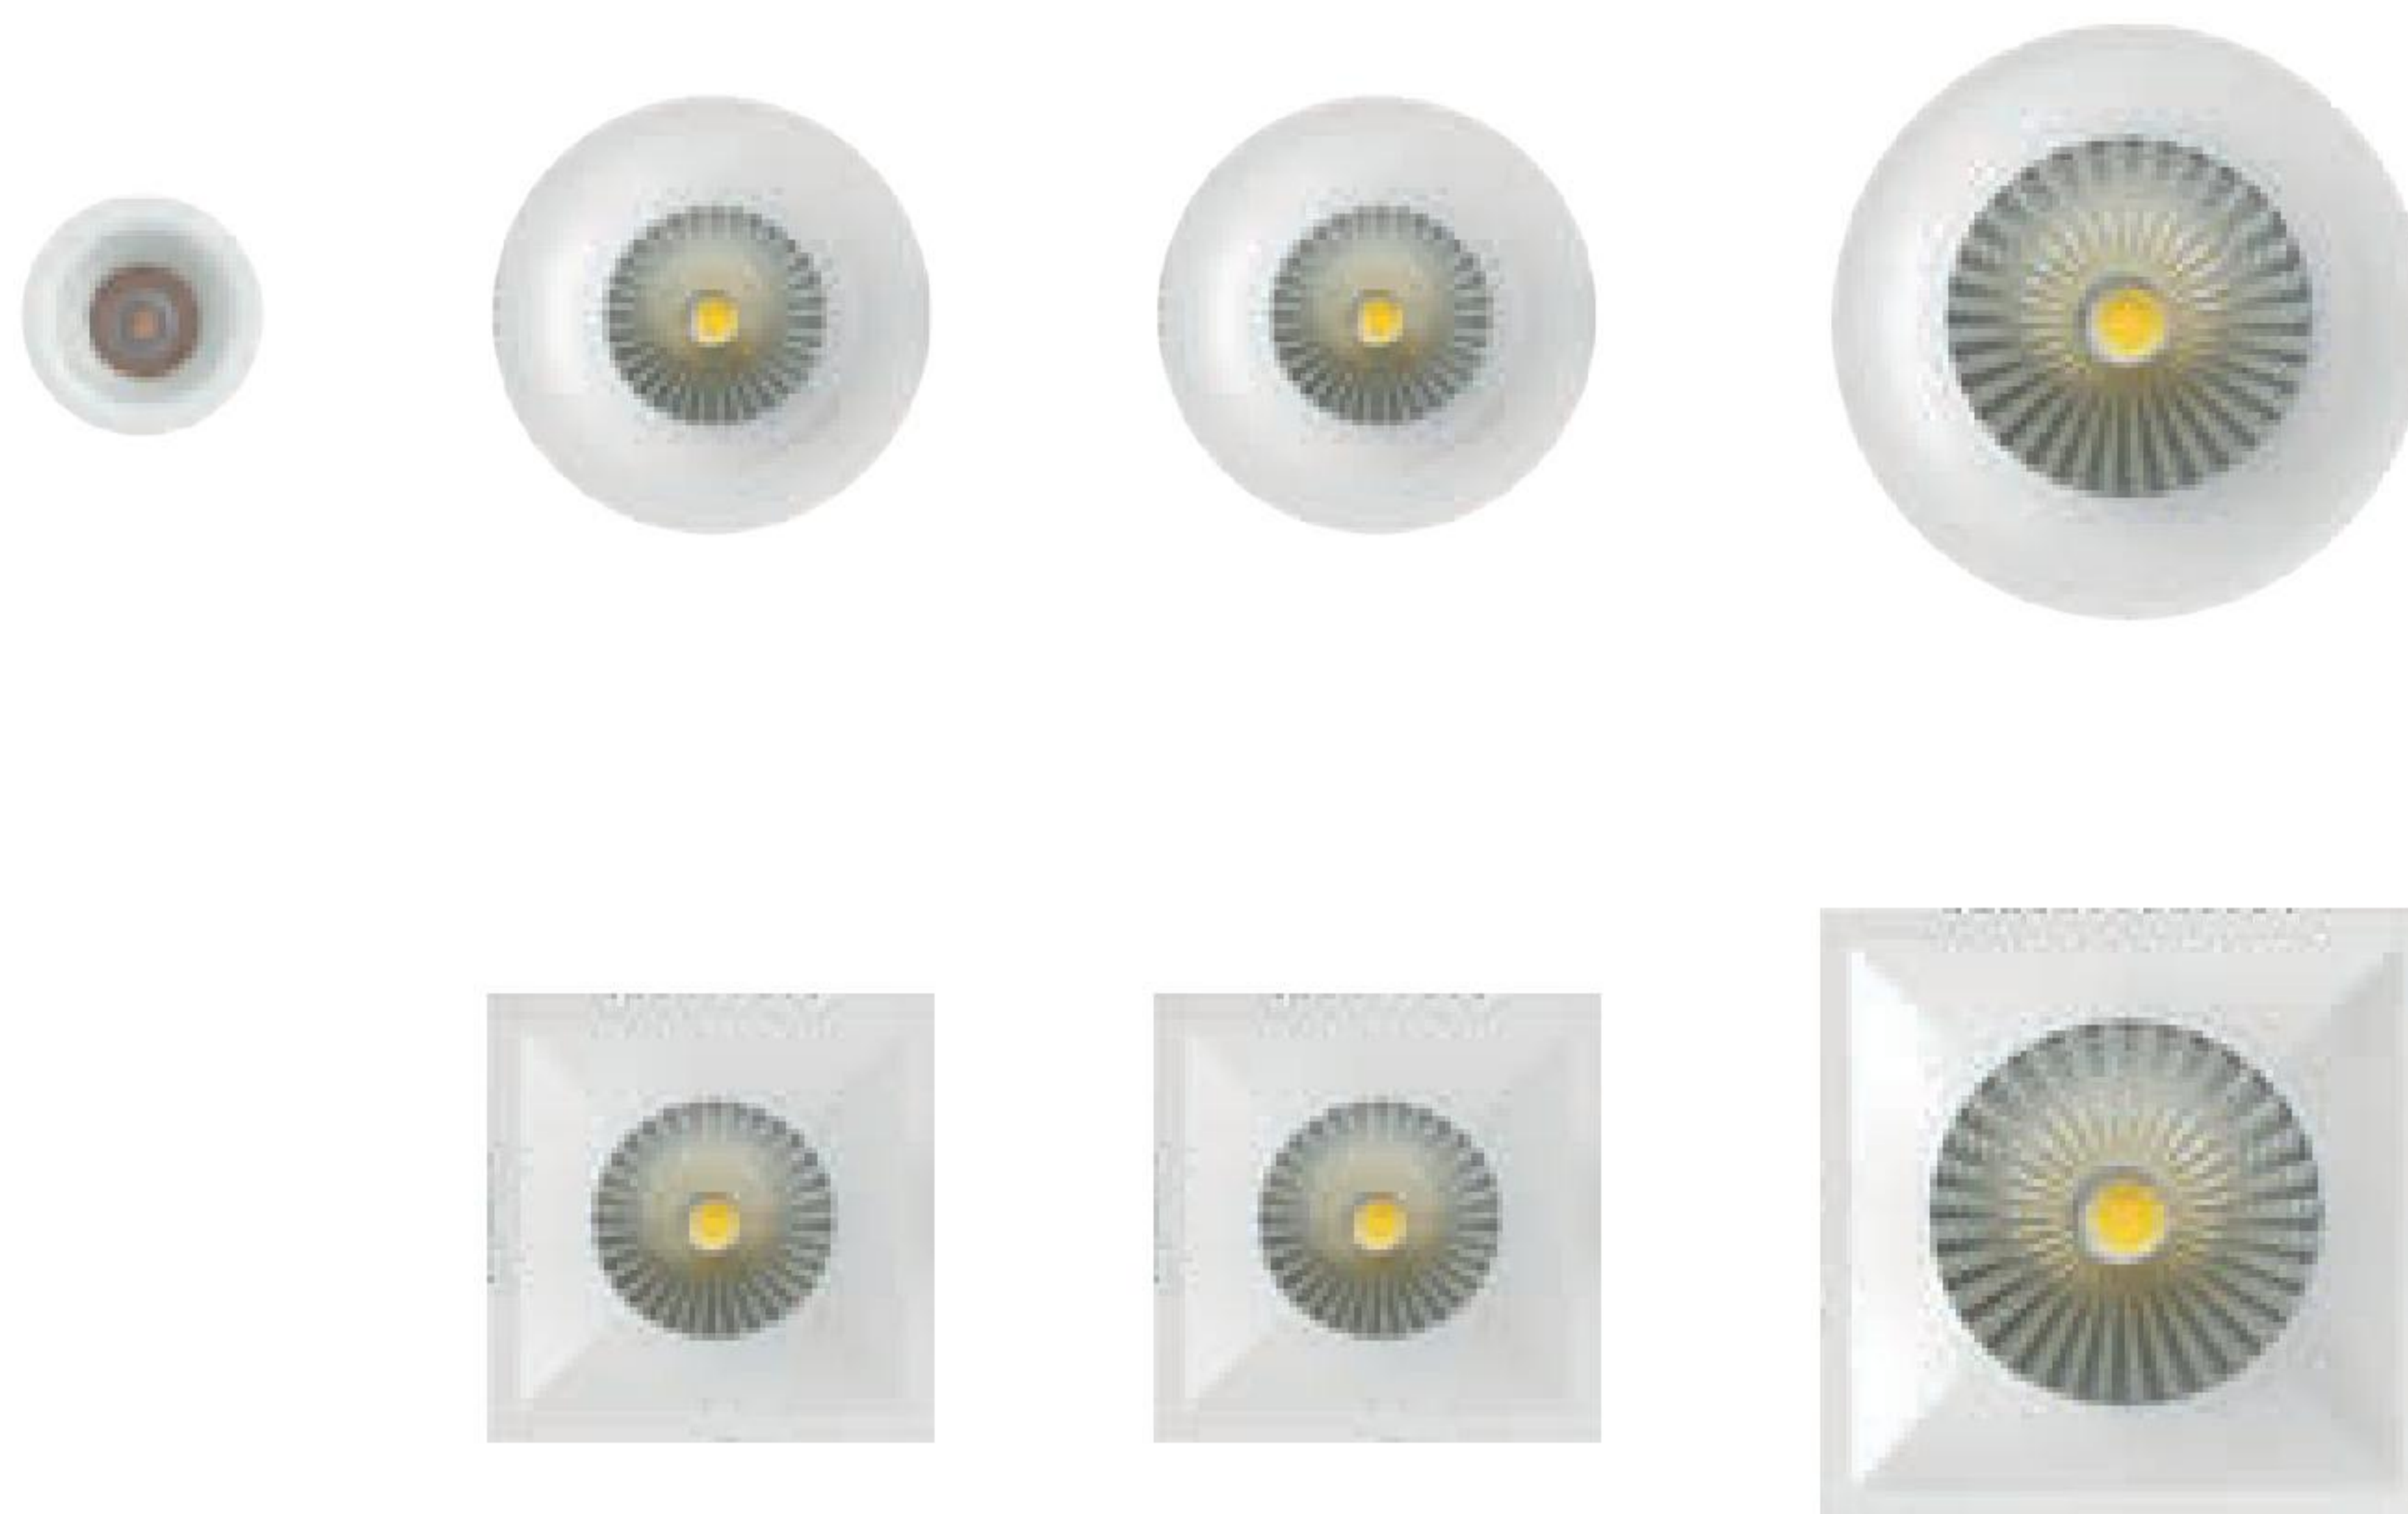















# Ioro range



IP44  
IP65

	4 W	8 W	13 W	25 W
<b>_R</b> 	-	Ø 76 mm	Ø 76 mm	Ø 105 mm
<b>_RJ</b> 	Ø 69 mm	Ø 100 mm	Ø 100 mm	Ø 139 mm
<b>_Q</b> 	-	□ 70 mm	□ 70 mm	□ 100 mm
<b>_QJ</b> 	-	□ 100 mm	□ 100 mm	□ 139 mm
<b>Accessories</b>				
<b>Finish</b>				
<b>Balance CRI 92</b>	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
<b>Efficiency CRI 80</b>	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
<b>Optics</b>	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood
<b>Driver</b>	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI
	62 mm (_RJ)	68 mm (_R) 64 mm (_Q) 92 mm (_RJ) 91 mm (_QJ)	68 mm (_R) 64 mm (_Q) 92 mm (_RJ) 91 mm (_QJ)	95 mm (_R) 127 mm (_RJ) 93 mm (_Q) 124 mm (_QJ)