

### Minimal size

Using a curved rear dissipator reduces the recess depth and allows the Loro range of products (except for the 25 W) versions to adapt to the installation on dropped ceilings with height lesser than 10 cm.

### UGR<19

The optics group, consisting of a chrome-plated reflector and a transparent polycarbonate diffuser offers an optimal reflectance control and a UGR index below 19, i.e. the threshold value for the correct lighting of offices and environments with video terminals (UNI-EN 12464-1 standard).



### IP65 O.C.


The optics gr group offers an IP65 front index of protection, i.e. full protection against entry of dust and extremely fine particles, as well as sprays and water jets. WARNING the value exclusively refers to the optics section and NOT the lamp body (IP44 index of protection).



### Finishes

Four finishes available:

- white RAL9003
- black RAL9005
- grey RAL9006
- warm & chic gold

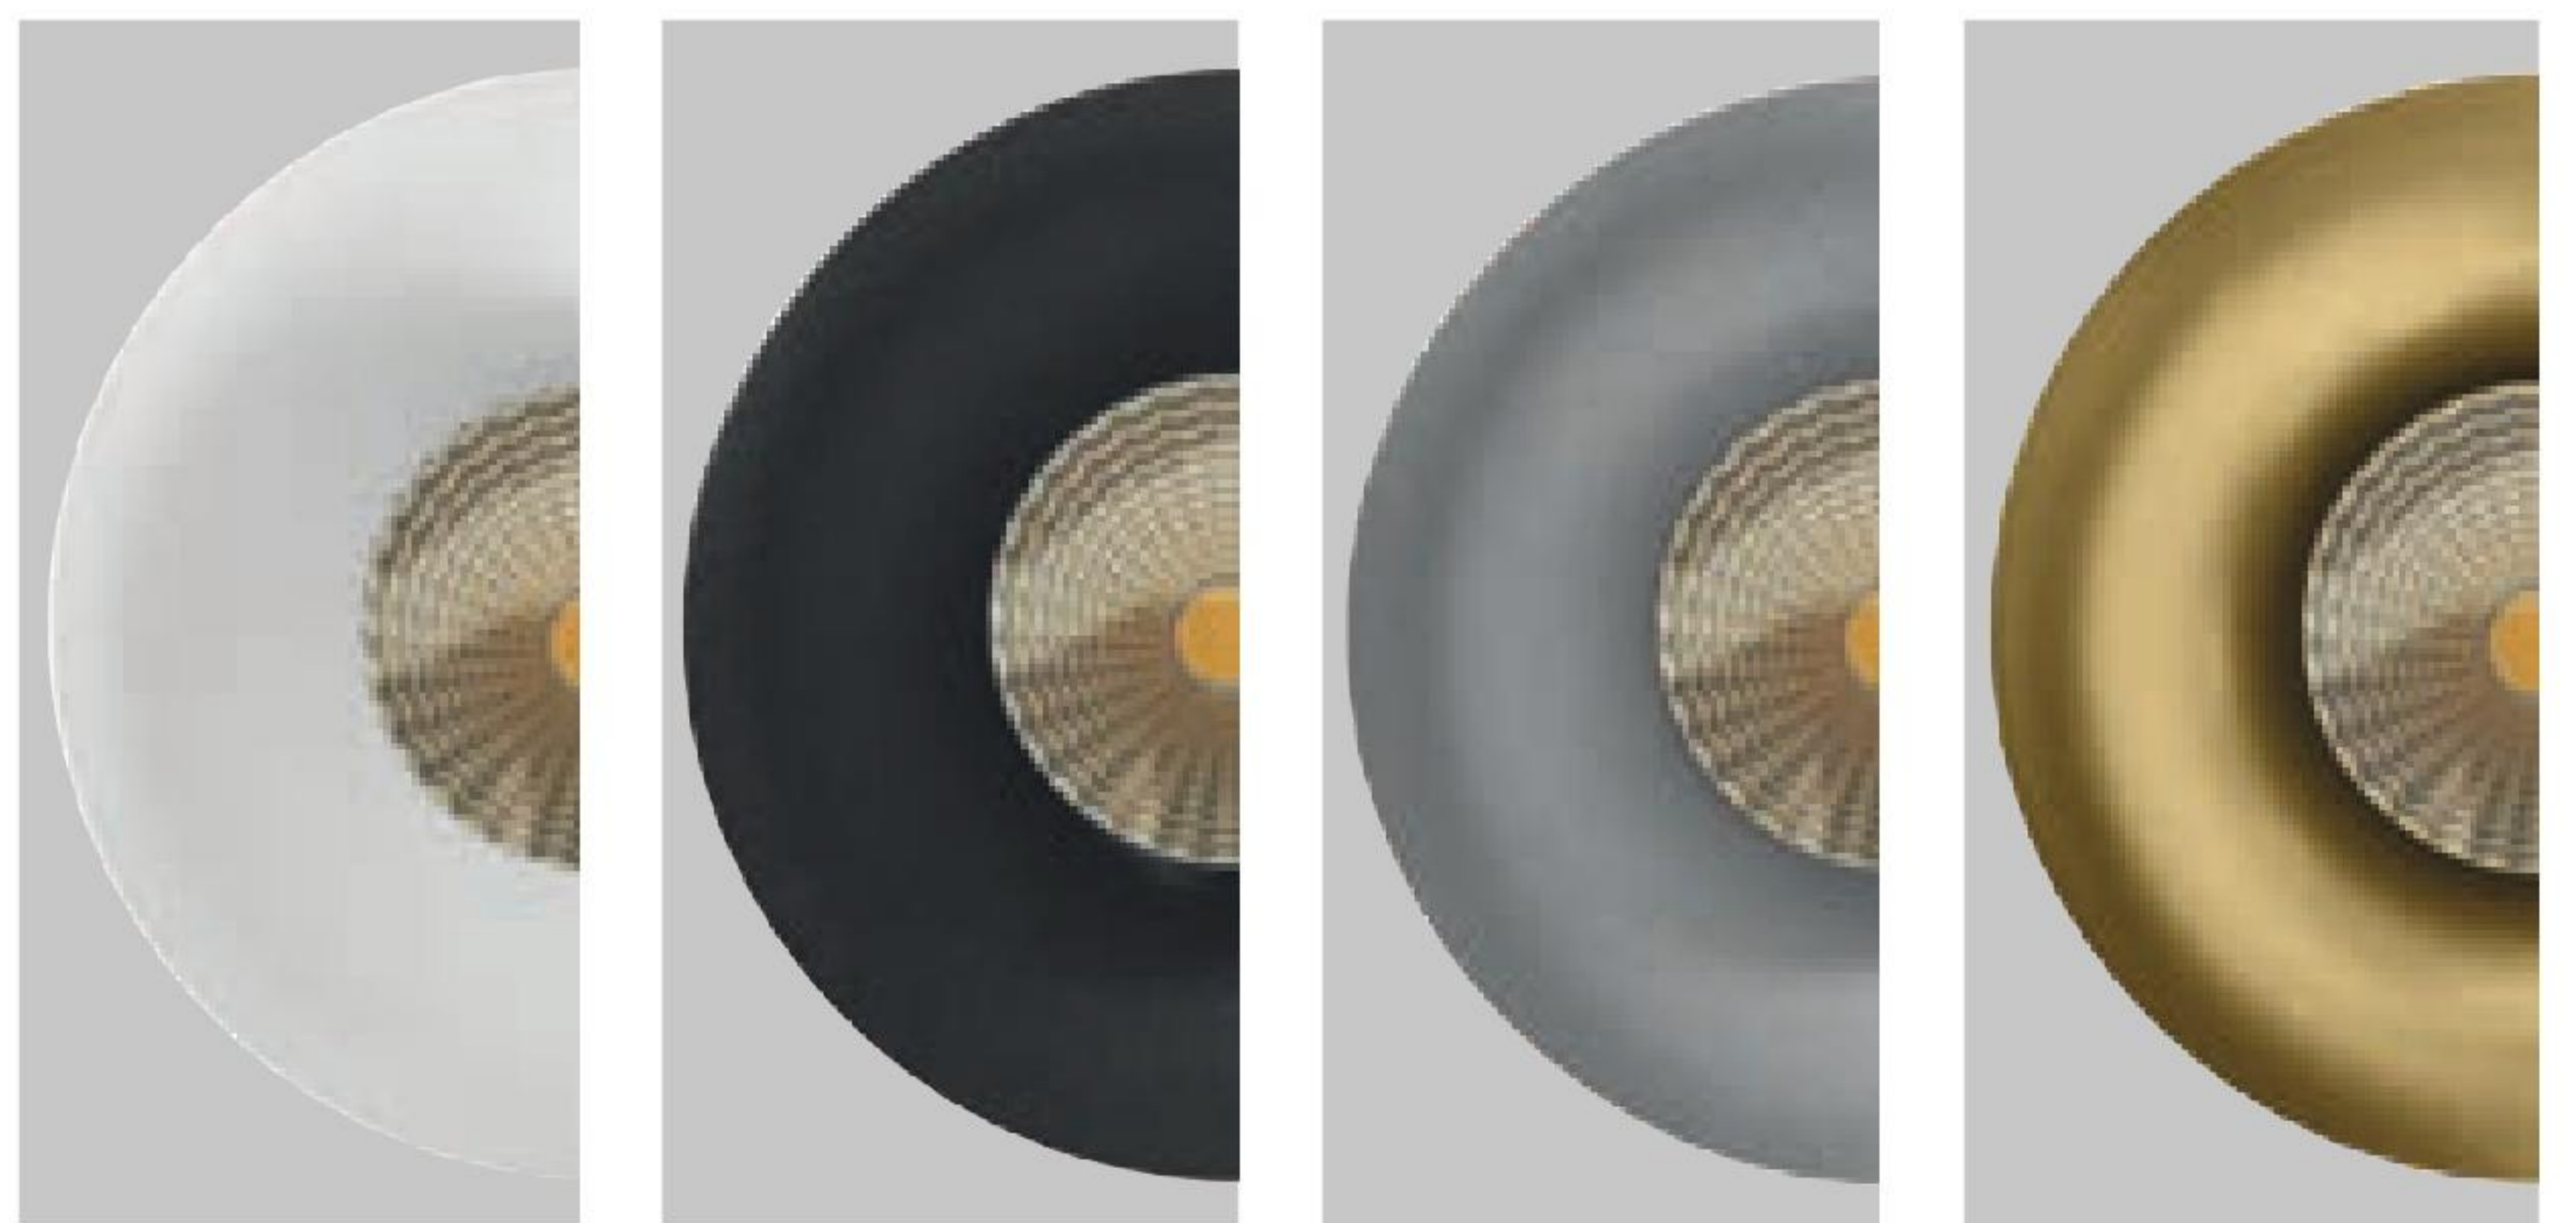

### Tilting version

The Loro\_RJ and Loro\_QJ range of products come with a 350° mobility on the horizontal axis and a 35° tilt on the vertical axis.

