


Balance - CRI 92

White	80362	2700 K	2598 lm	M	Spot	15
Black	80363	3000 K	2794 lm	W	Medium Flood	30
Grey	80364	4000 K	2990 lm	N	Flood	60
Gold	80365					



White	80903
Black	80904
Grey	80905
Gold	80906

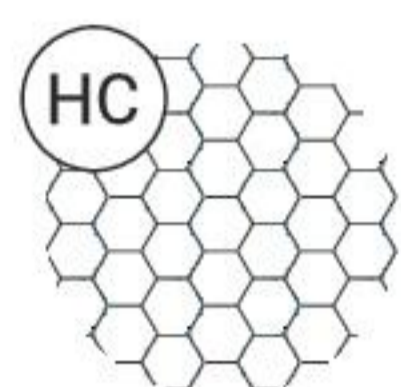


Efficiency - CRI 80

White	80366	2700 K	3210 lm	M	Spot	15
Black	80367	3000 K	3431 lm	W	Medium Flood	30
Grey	80368	4000 K	3431 lm	N	Flood	60
Gold	80369					



White	80899
Black	80900
Grey	80901
Gold	80902


Electronics

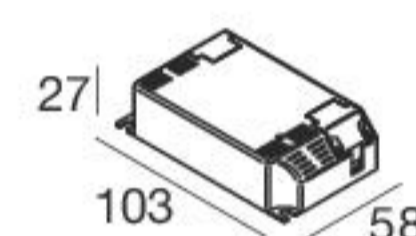

99112
ON/OFF
1 art.




99188
0/1-10V DALI
1 art.

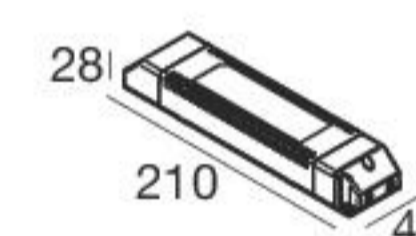


99330
DALI
1 art.


91204W60

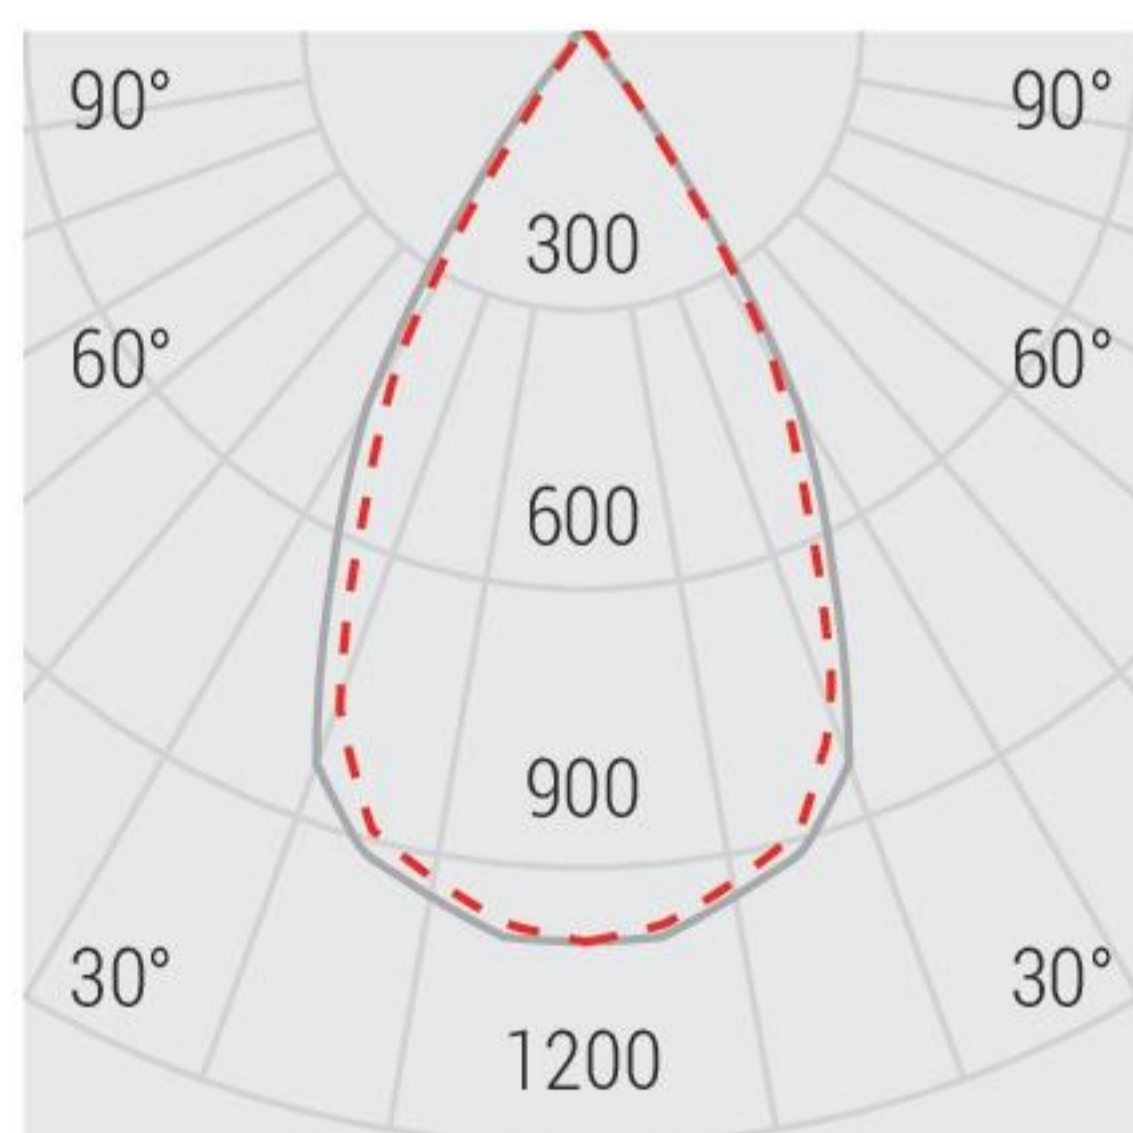


Photometric curve

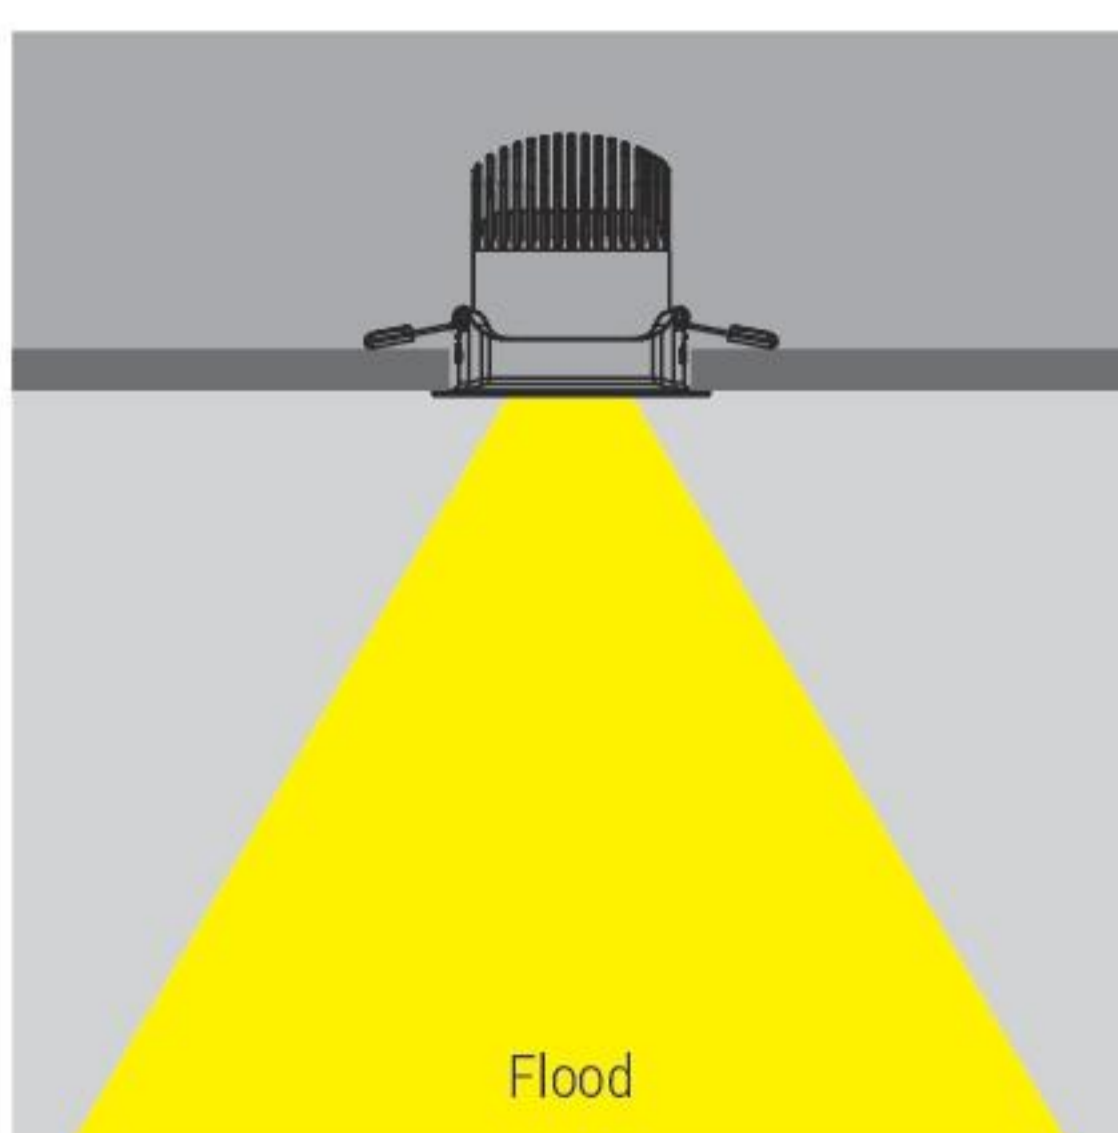

Light beam

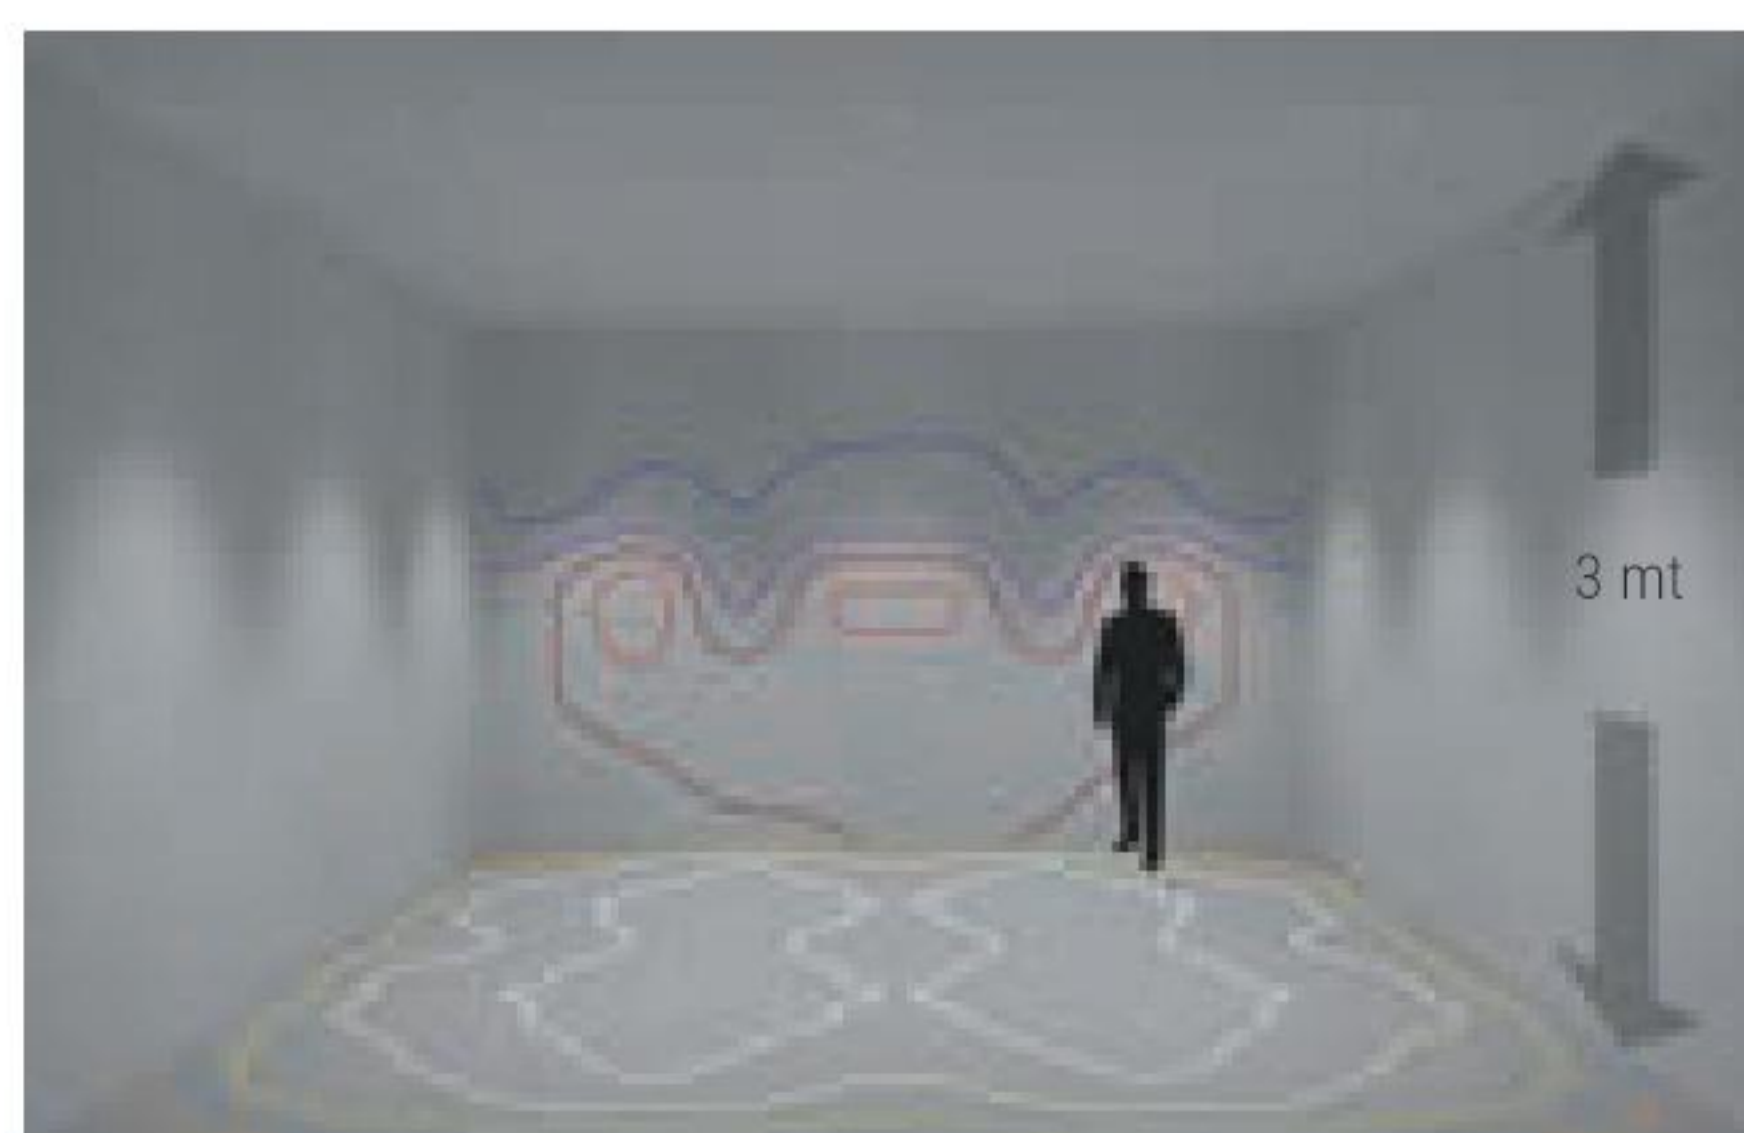

50 LUX 75 LUX 100 LUX 125 LUX 200 LUX 250 LUX 300 LUX 350 LUX

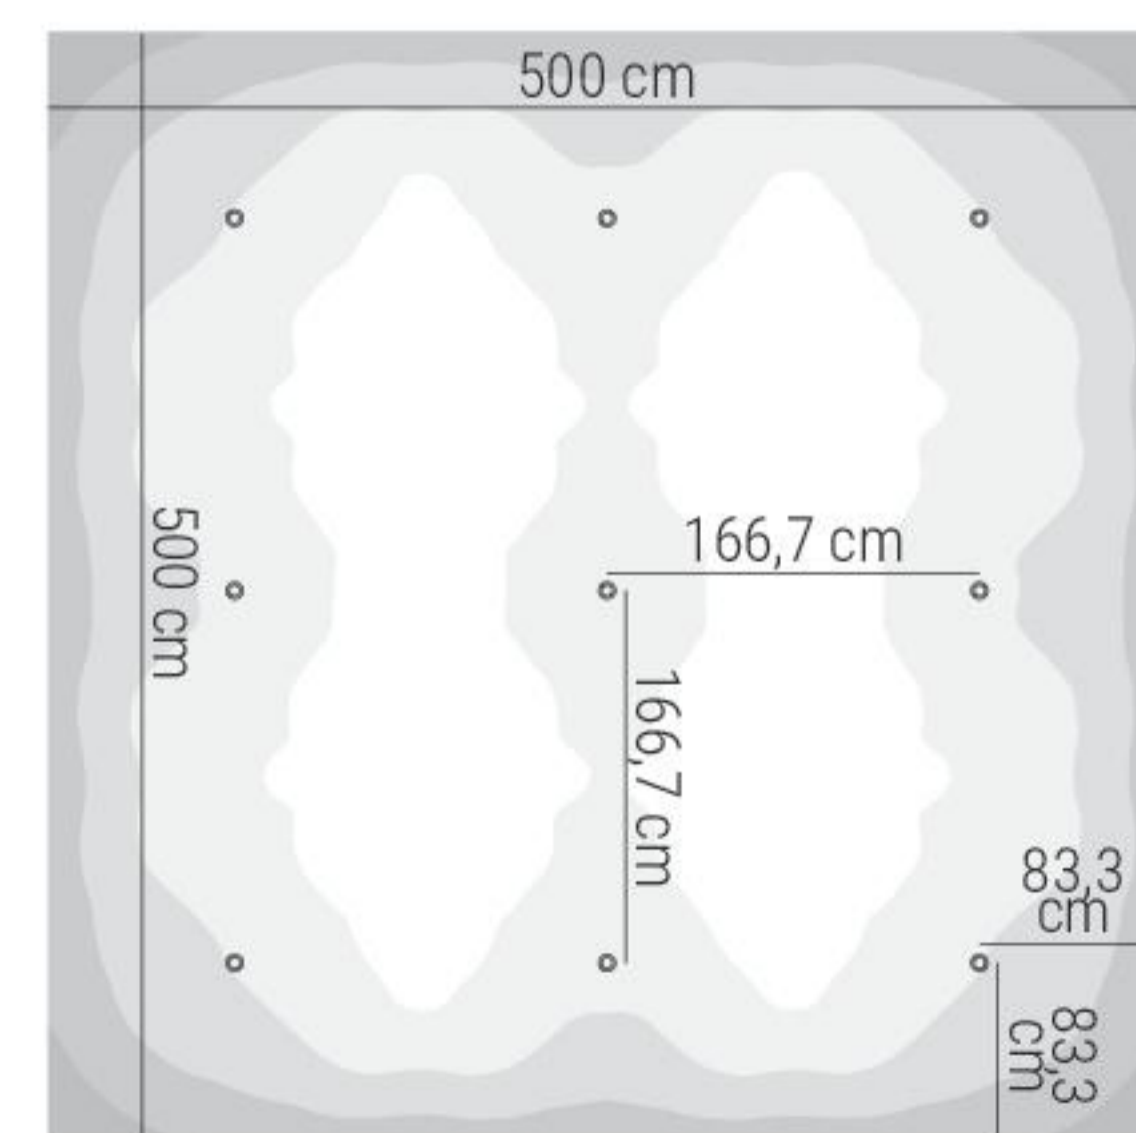

Floor plan