


Cob65_Q | Downlight | arrayLED 25 W 720 mA

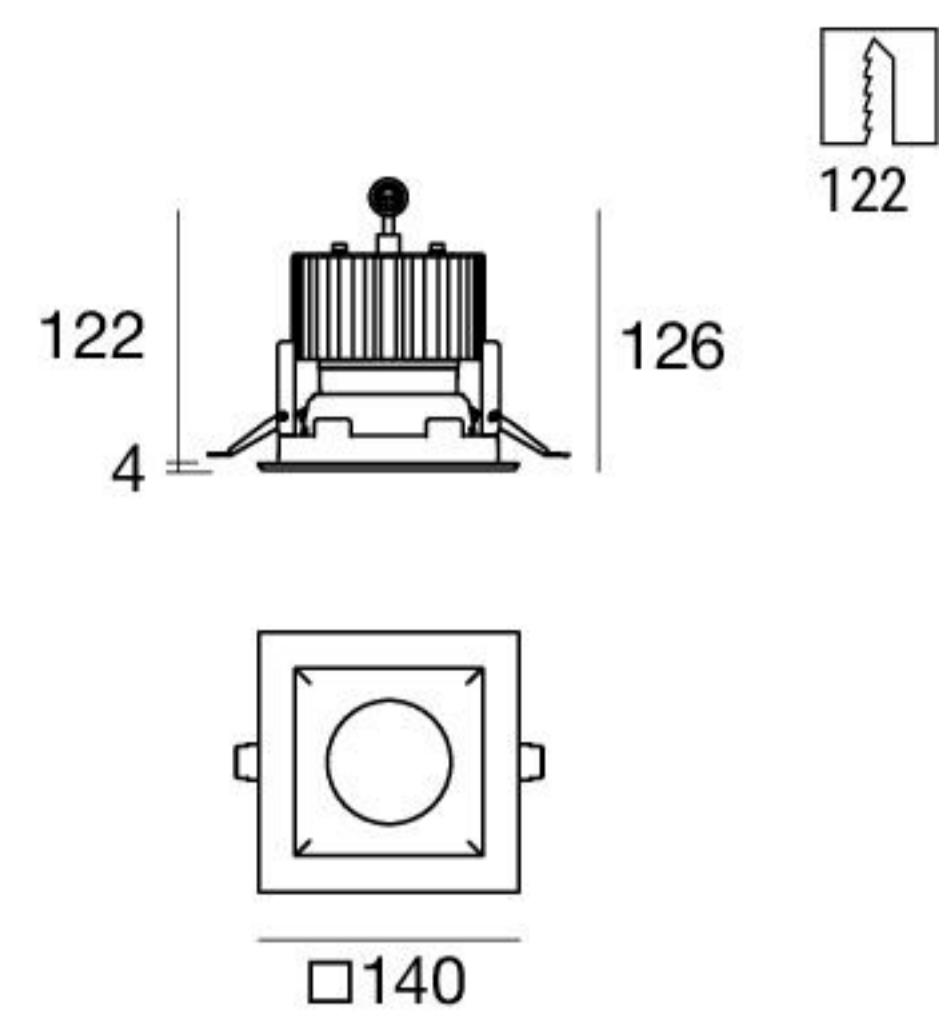

CRI 80


White	96863	2700 K	3400 lm	M	Wide Flood	90
		3000 K	3637 lm	W		
		4000 K	3909 lm	N		

Electronics

 27 103 58 99112 ON/OFF 1 art.	 40 208 89 99188 0/1-10V DALI 1 art.	 28 210 48 99330 DALI 1 art.
---	---	---



Cob65_Q | Downlight | arrayLED 30 W 840 mA

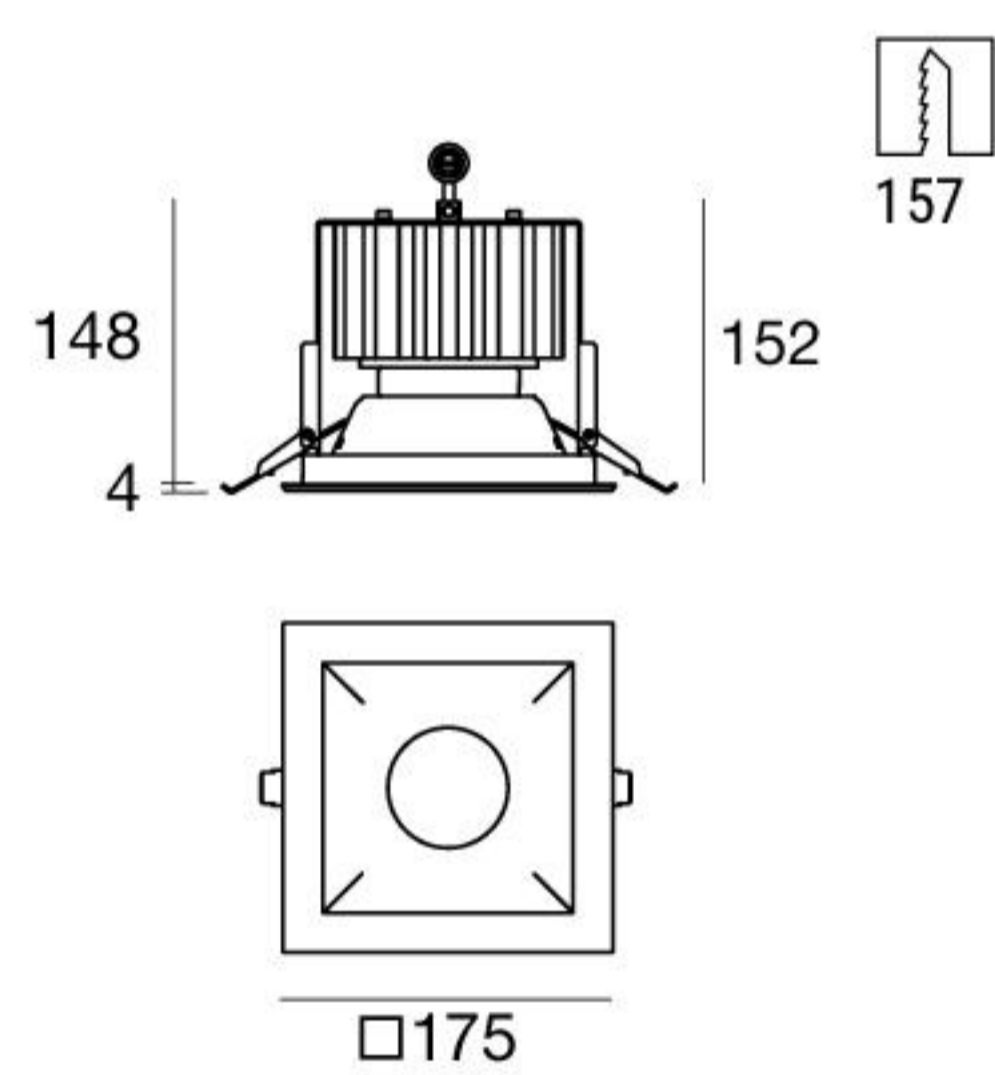

CRI 80


White	96867	2700 K	3991 lm	M	Wide Flood	90
		3000 K	4270 lm	W		
		4000 K	4588 lm	N		

Electronics


 27 103 58 99093 ON/OFF 1 art.	 40 208 89 99187 0/1-10V DALI 1 art.	 28 210 48 99330 DALI 1 art.
---	---	---




97140N40

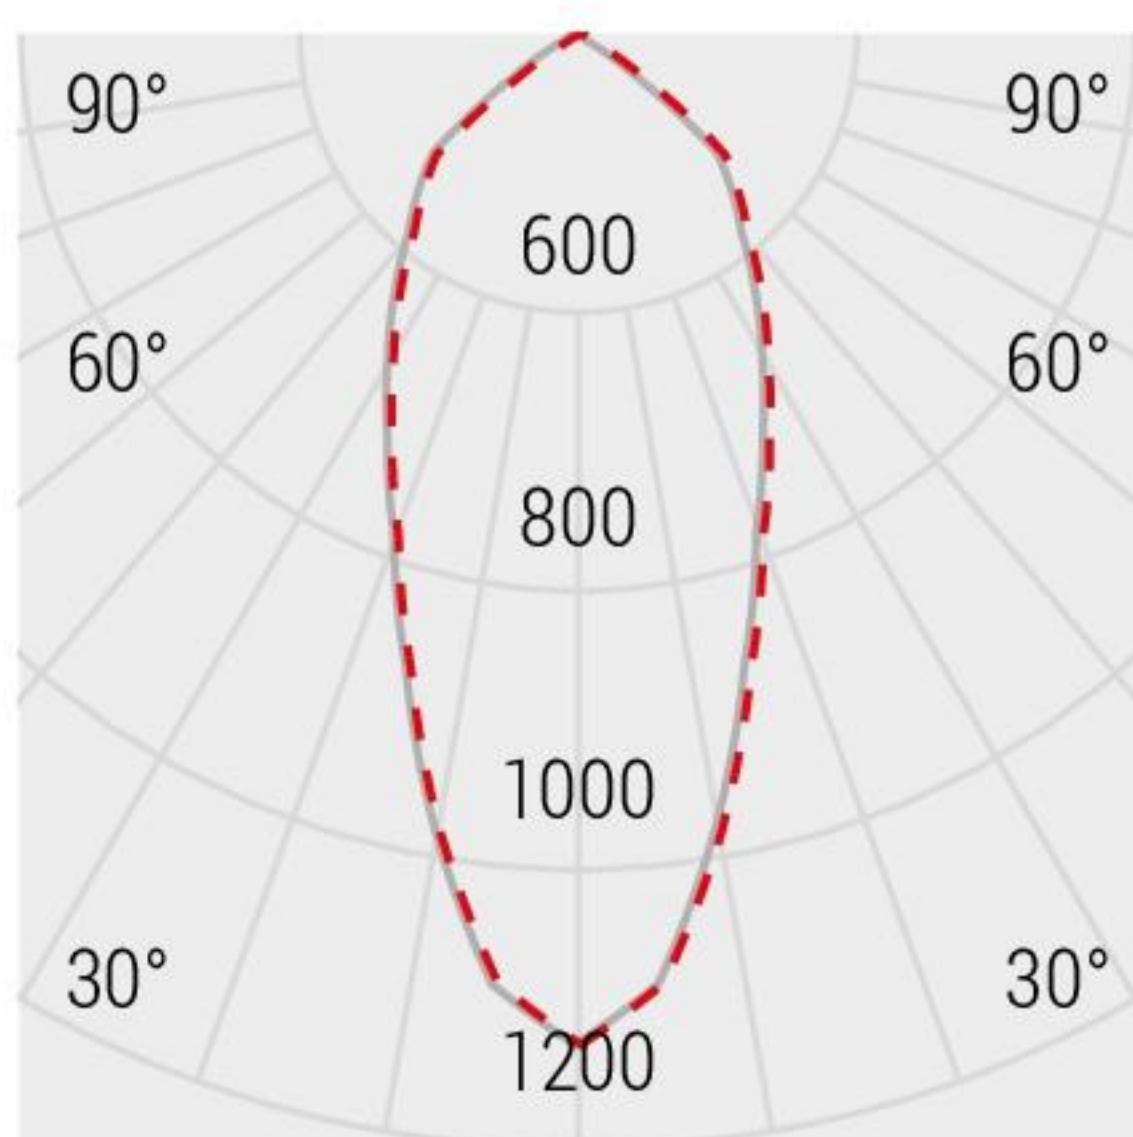


Photometric curve

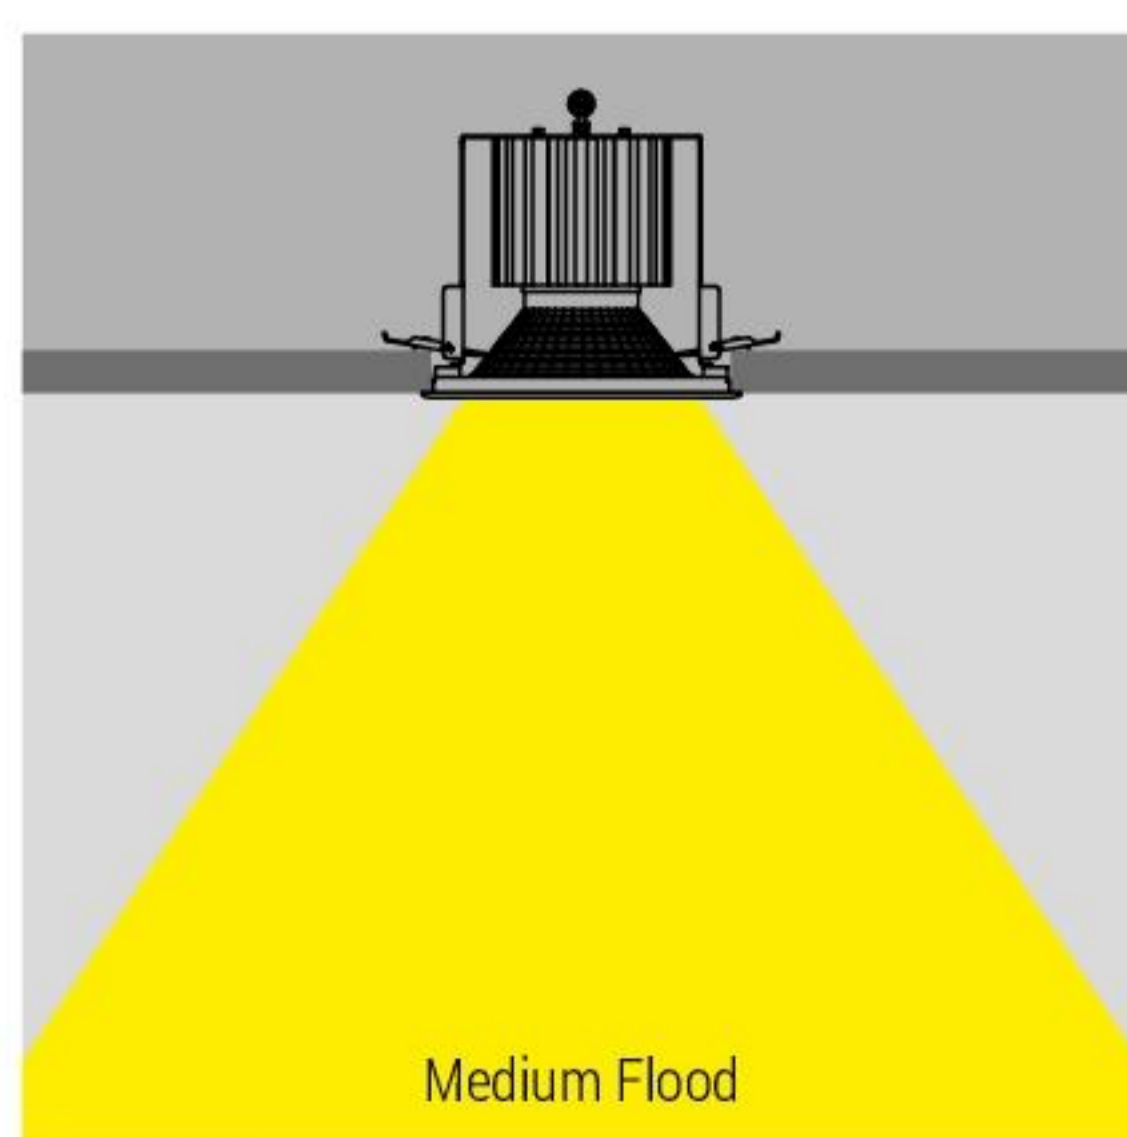

Light beam

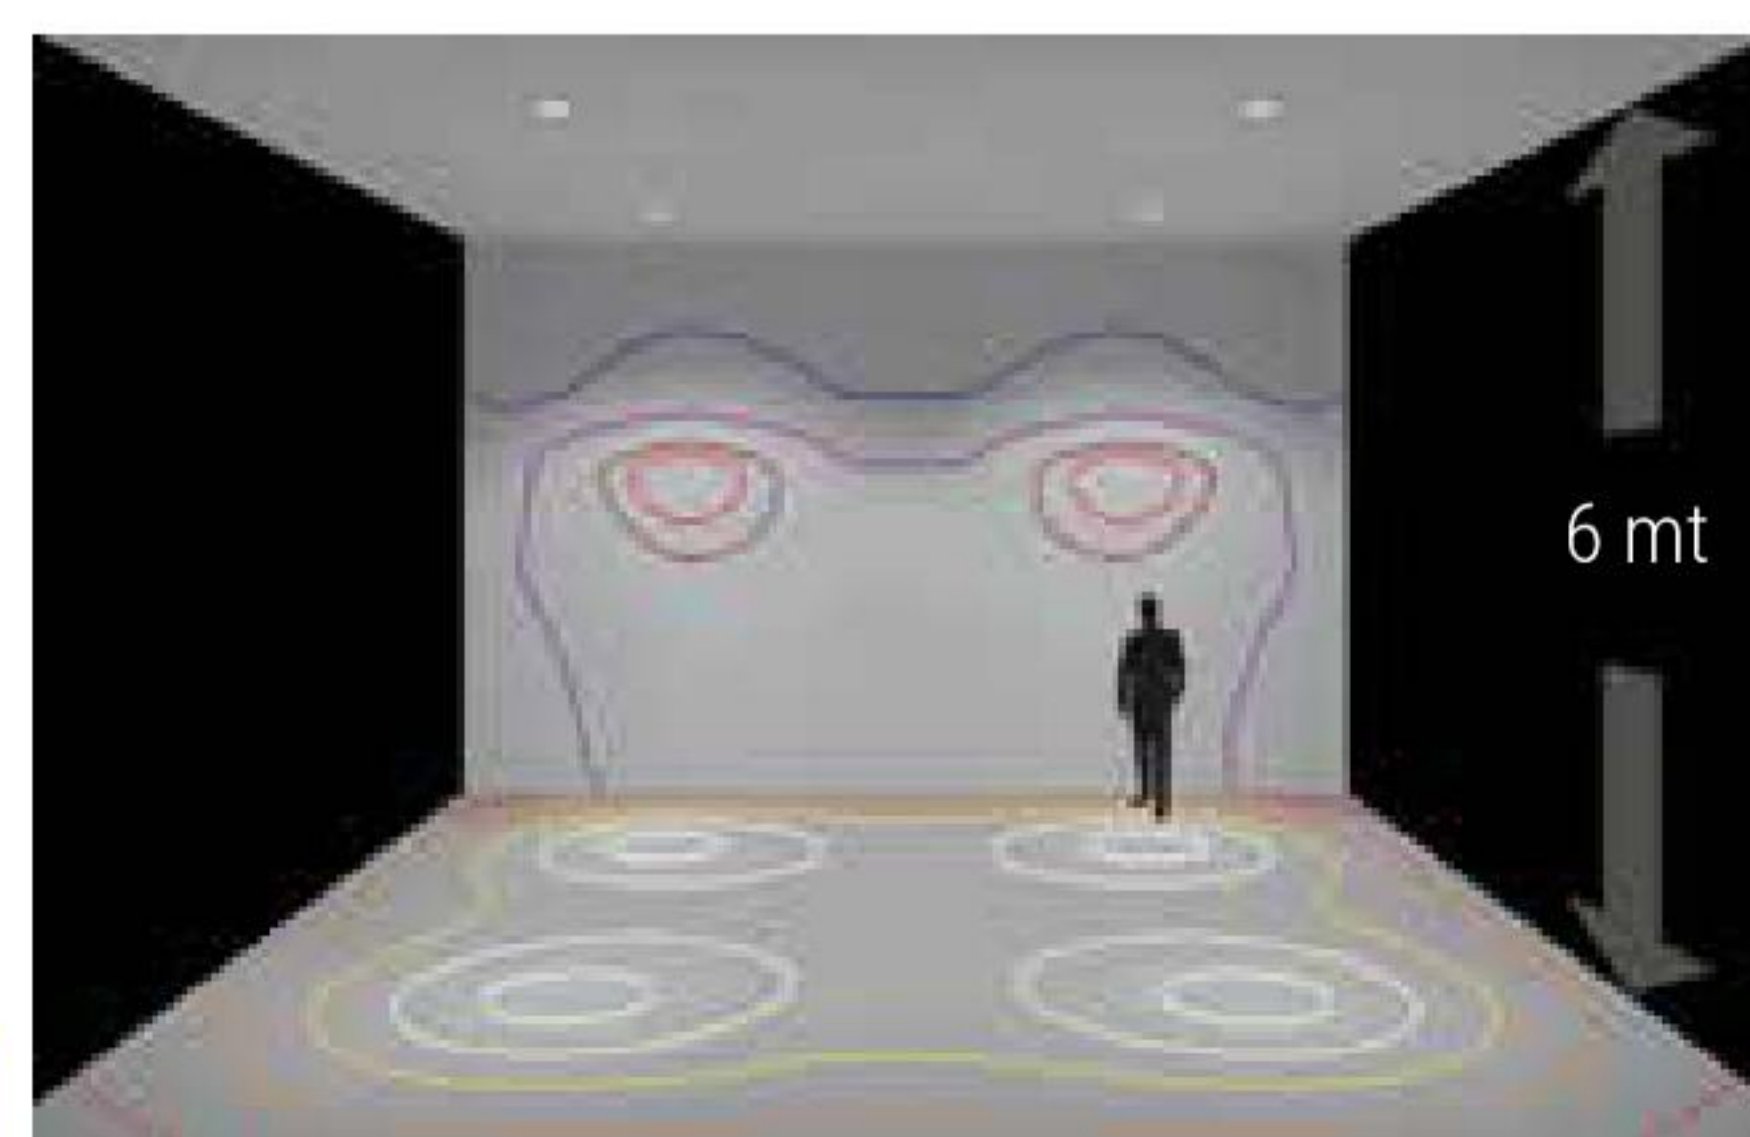

25 LUX 50 LUX 70 LUX 75 LUX 100 LUX 125 LUX 150 LUX 175 LUX

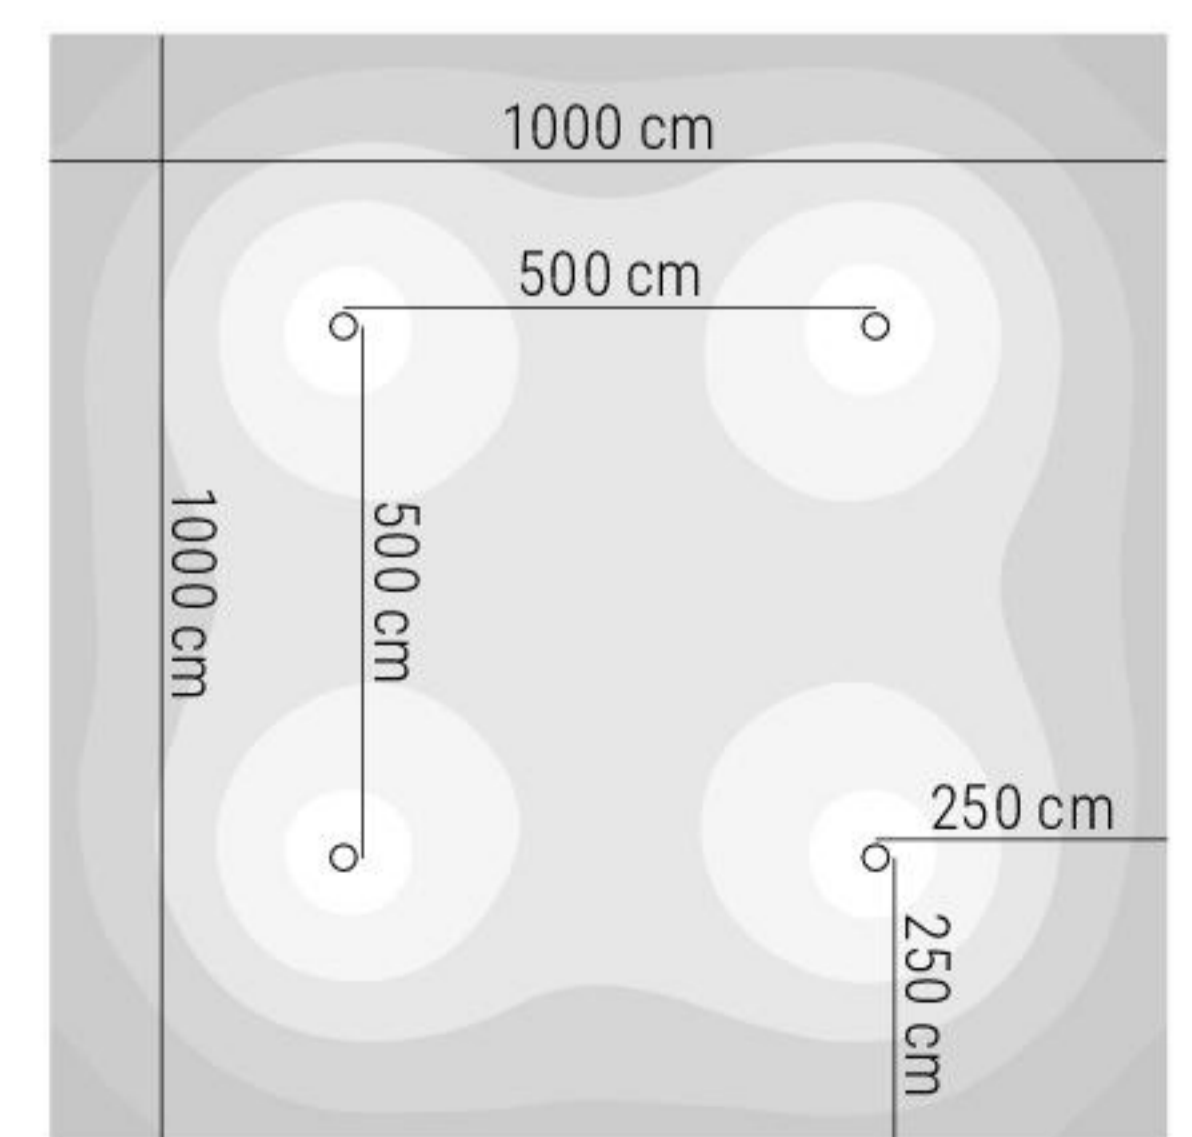

Floor plan