

## Versatile projector

New drivers provided with anti-flickering device and equipped with state of the art protections against overvoltage, electrostatic discharges and emission of electromagnetic interference. Available in DALI version.



### Emission control accessories

Pound is compatible with a wide range of light beam control accessories: standard cylindrical screen and at 45 degrees, fully or partly eliminating the secondary beam and reducing the light cone; cross-like and honeycomb diffuser, for controlling and reducing glaring more or less markedly; directional fins and elliptical filter, for shaping the light or creating ovalized projections.

Driver integrated into the three-phase track

Sealing cap

LED

TIR lenses



## Dynamic projector

The Pound projectors come with a 360° mobility on the horizontal axis and a 90° (+45° / -45°) tilt on the vertical axis.

### Joint design

The joint is conceived to form a single body with the profile of the projector when the latter is in the zenith position, thanks to the slot present in the lamp body designated to house the support arm, thus concealing it.

Locking system




## Diode varieties

The Pound range of products offers the highest combination-source degree, given that it is fit for LED Balance - CRI 92, Specialty - CRI 98 and Fidelity - CRI 98 diodes. This allows obtaining maximum versatility of use, given that Pound can be installed in various environments ranging from museums to retail, depending on the specific type of source chosen.


### Fidelity

Excellent accuracy in colour representation in all of its shades

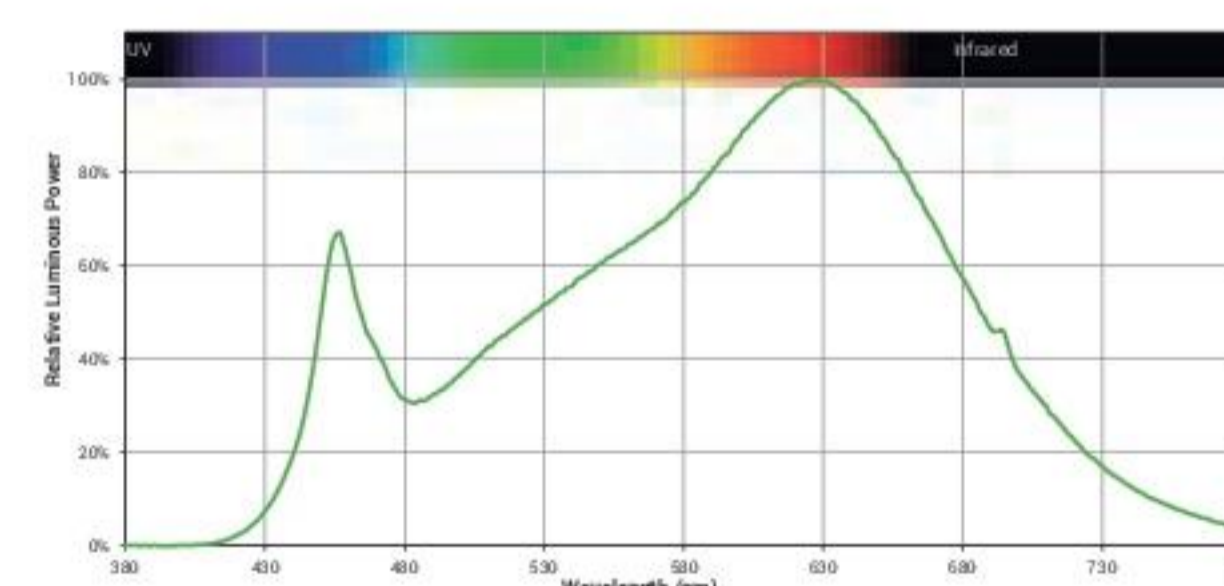

### Specialty

Excellent range of chromatic saturation

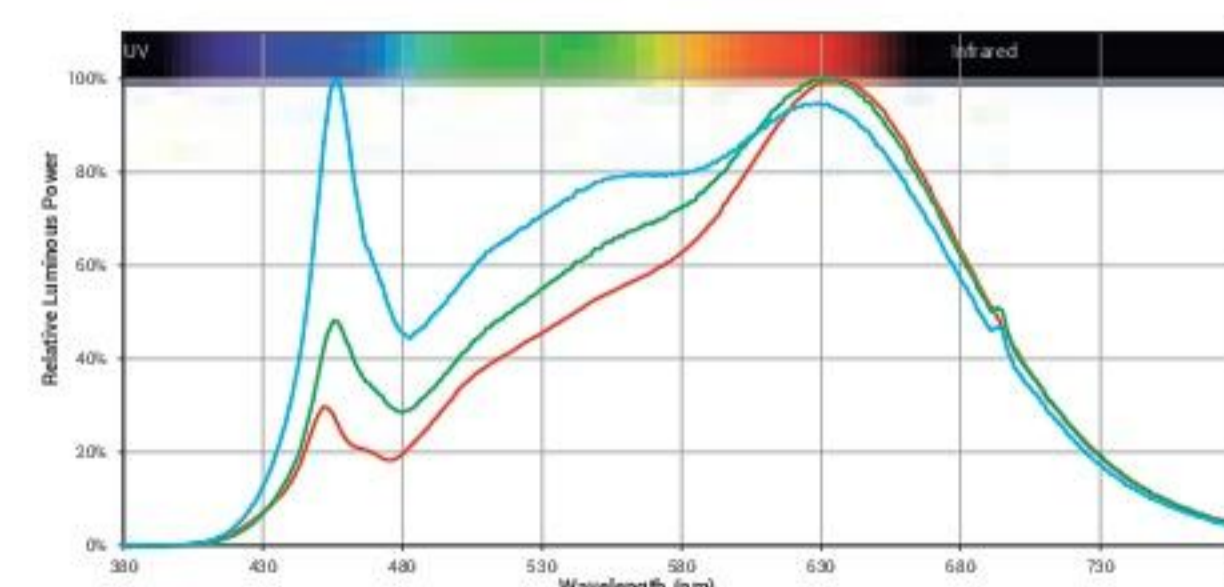

### Balance

Excellent efficiency in terms of emission and optimum balance between fidelity and gamut

