

Fylo+ Direct\_1 Reel diffuser | Recessed linear light



type	L mm	
White	1000	<b>65180</b>
White	2000	<b>65181</b>
White	custom	<b>65187*</b>

The modules must be completed with light source and power supply.

\* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65187.

Accessories




**65184**  
Opaline diffuser  
L roller 5 m



**65183**  
Opaline diffuser  
L roller 10 m




**65182**  
Opaline diffuser  
L roller 20 m

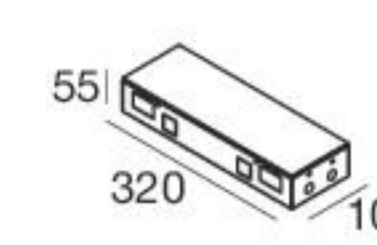

**62900**  
Outer casing for  
dropped ceiling

**RTG** 65180  
65181

Fylo+ | Light units - Inflex | topLED 7W

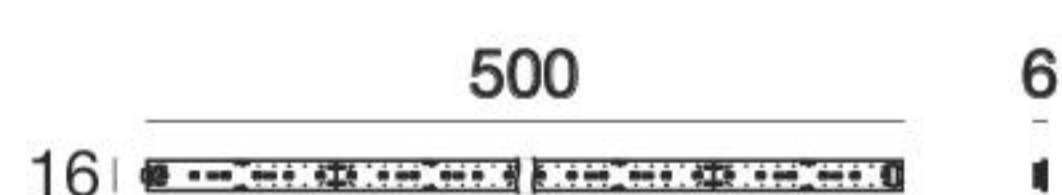

CRI80		colour	optics
Master+Slave	<b>65050W</b>	L 2x500 mm 3000 K	2x650 lm 2 pcs general
Master+Slave	<b>65050N</b>	L 2x500 mm 4000 K	2x650 lm 2 pcs general
Slave	<b>65051W</b>	L 10x500 mm 3000 K	10x650 lm 10 pcs general
Slave	<b>65051N</b>	L 10x500 mm 4000 K	10x650 lm 10 pcs general
Slave	<b>65052W</b>	L 2x500 mm 3000 K	2x650 lm 2 pcs general
Slave	<b>65052N</b>	L 2x500 mm 4000 K	2x650 lm 2 pcs general



LED bars section  
Should the total measurement be lesser that a multiple of 500 mm, using a hand saw the led bar can be cut into multiple pieces measuring 100 mm being keen to position the blade at the point indicated in the figure. An erroneous cutting will jeopardise the operation of the bar.

Electronics



**99374**  
ON/OFF  
1 - 10 art.



**99332**  
0/1-10V  
1 - 21 art.



**99722**  
DALI  
1 - 17 art.

**RTG**

Fylo+ | Light units - LED Strips



type	
▶ 941	Ribbon
▶ 943	Dropper

Electronics



**99374**  
ON/OFF  
75 W



**99332**  
0/1-10V  
150 W



**99722**  
DALI  
120 W

**RTG**