


Fylo+ Direct_2 | Recessed linear light | 100-264 V | topLED 14,5 W 500 mA

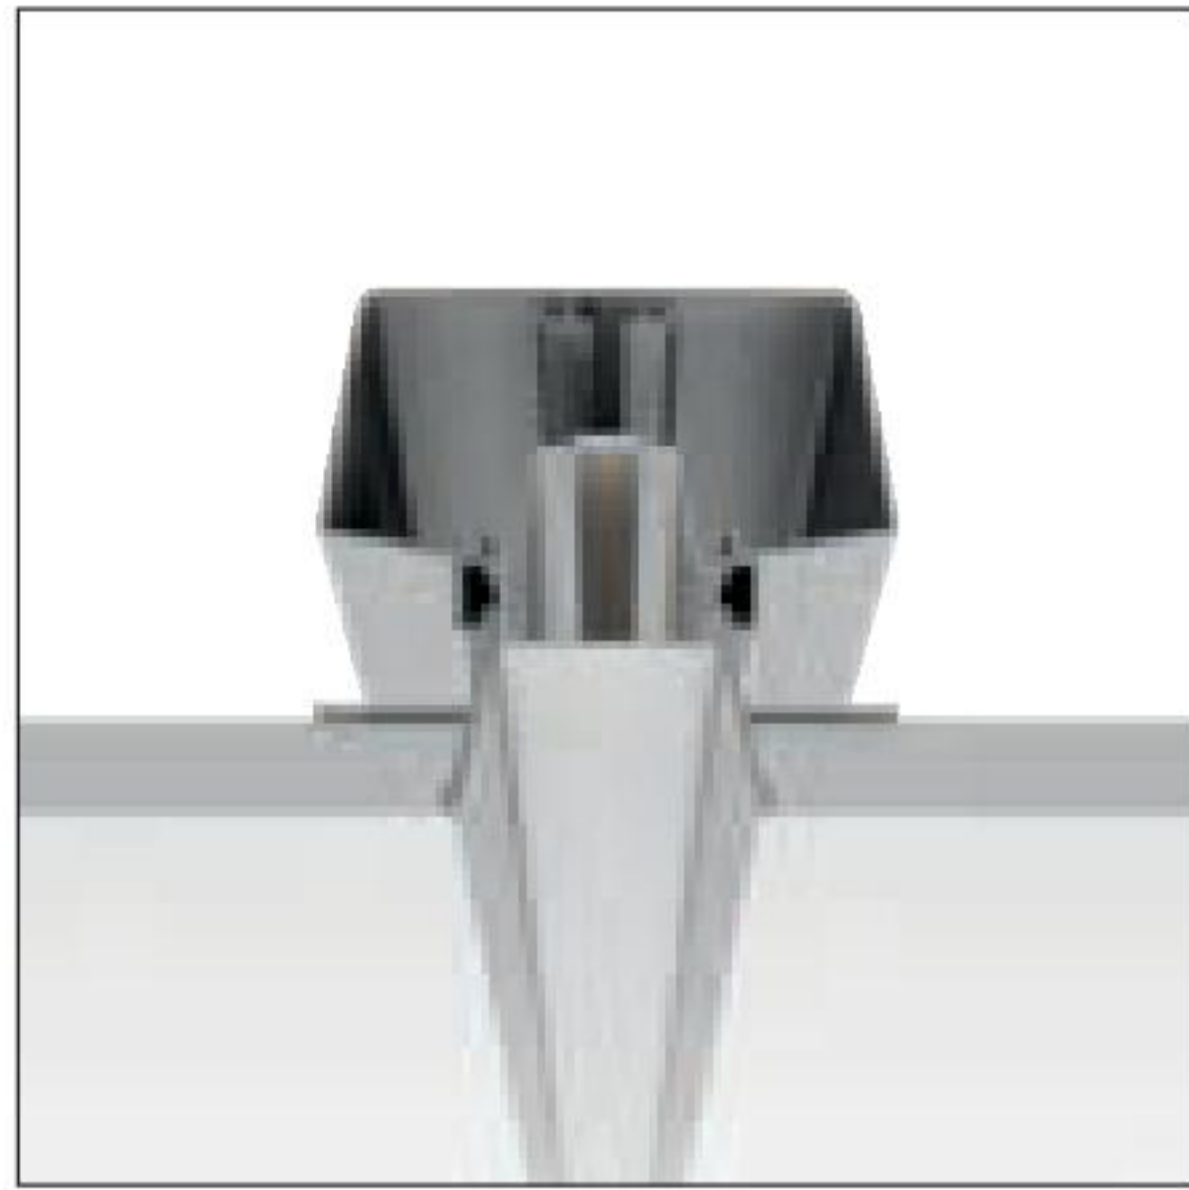

58 x 1005


Anod. Al. **65042**

2700 K 2020 lm
3000 K 2200 lm


M

General


00

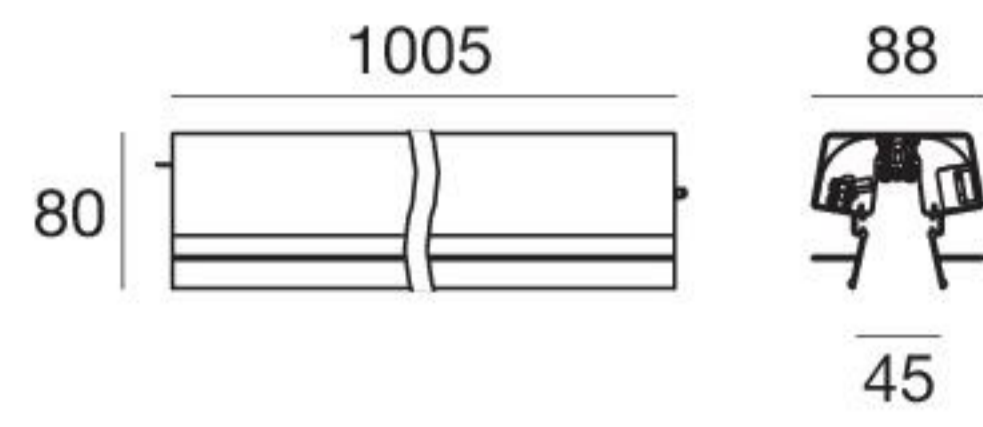


Accessories

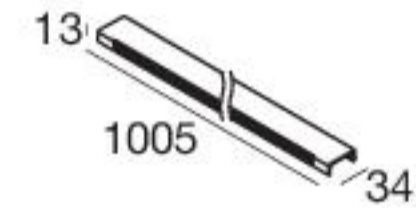


65056
Opaline diffuser
1pc
L 1 m

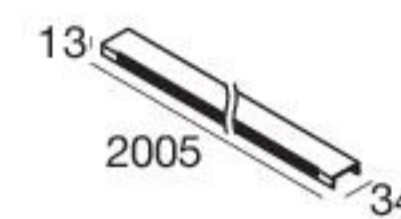


65057
Opaline diffuser
1pc
L 2 m

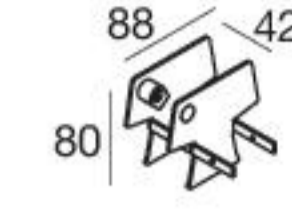

65044
Sealing caps
2 pcs

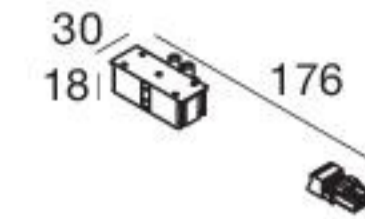


60127
Electrical connectors
3 poles



62180
Joints

The modules are complete with light source and power supply.

Fylo+ Direct_2 | Recessed linear light | 198-264 V | topLED 29 W 1050 mA

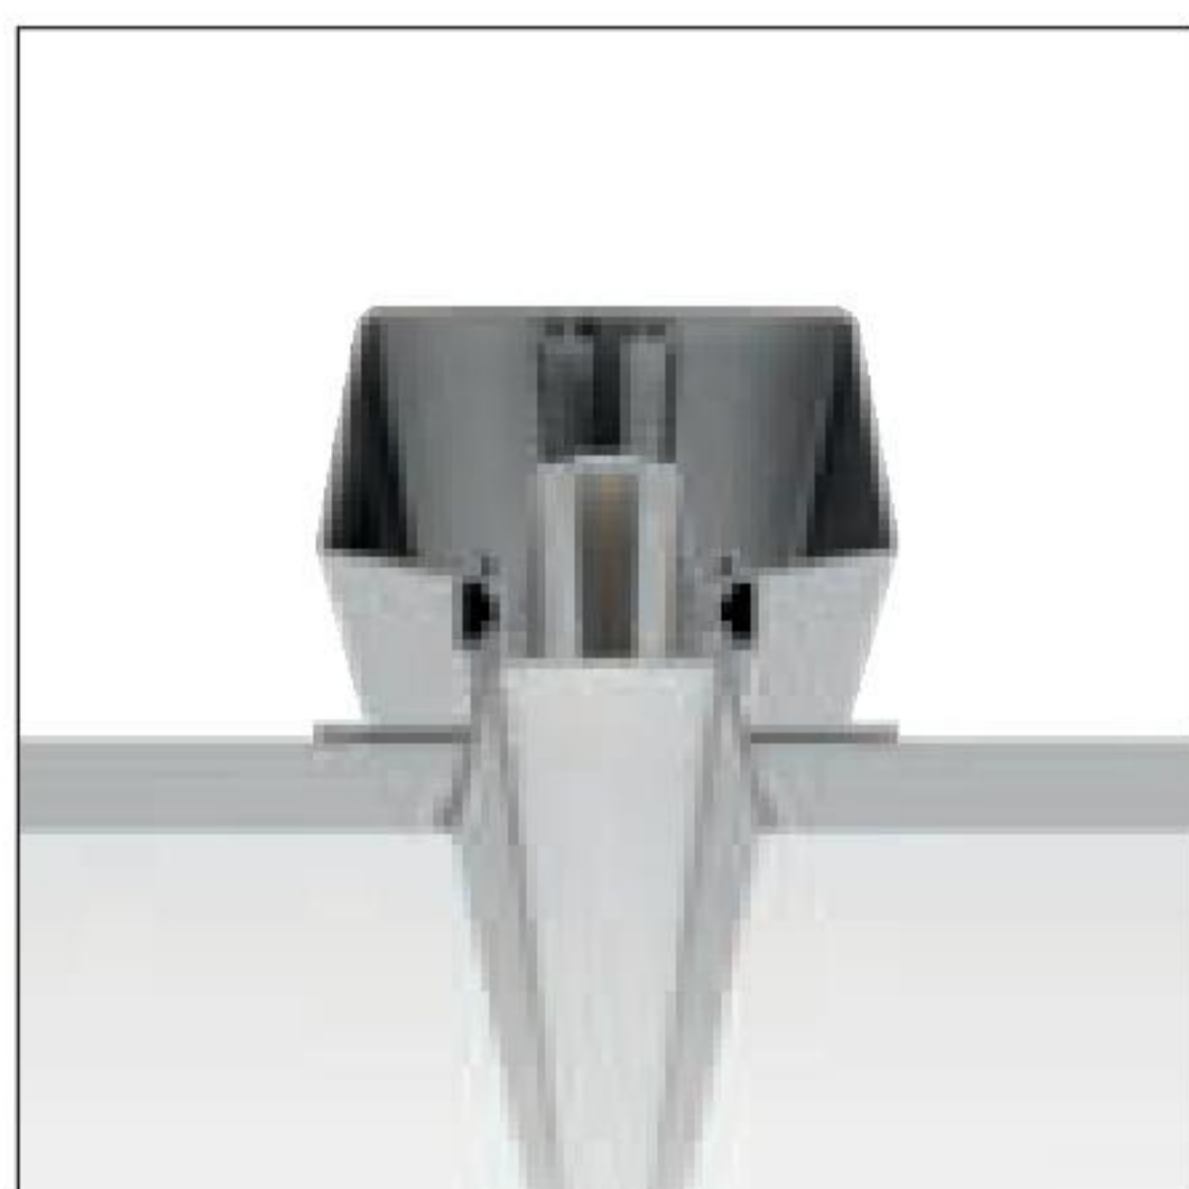

58 x 2005


Anod. Al. **65043**

2700 K 4040 lm
3000 K 4400 lm


M

General


00

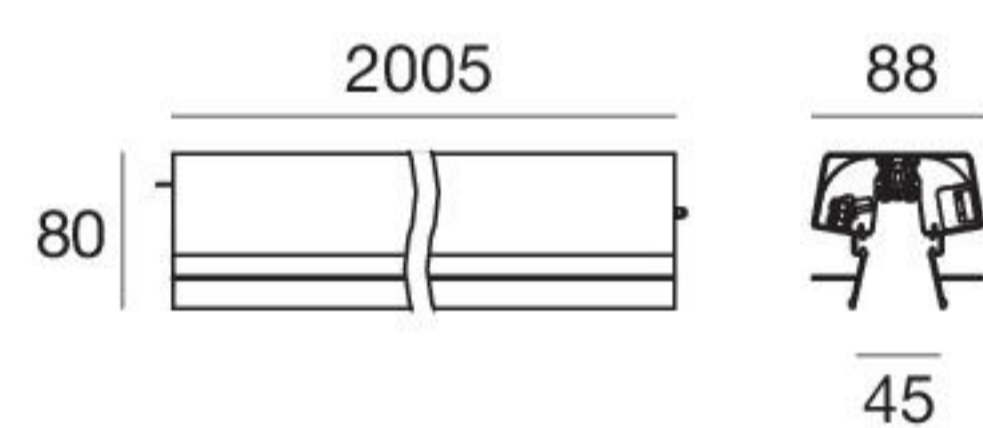


Accessories

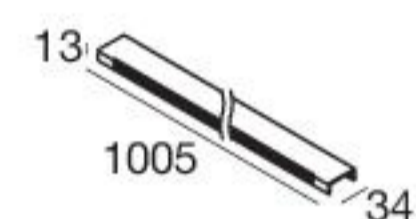


65056
Diffuser
1pc
L 1 m

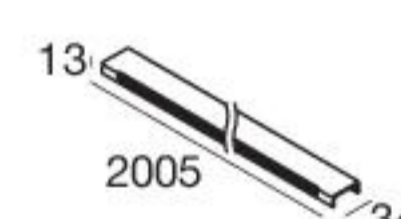


65057
Opaline diffuser
1pc
L 2 m

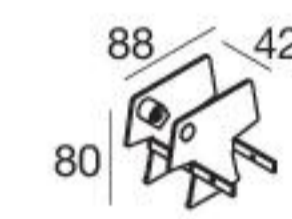

65044
Sealing caps
2 pcs

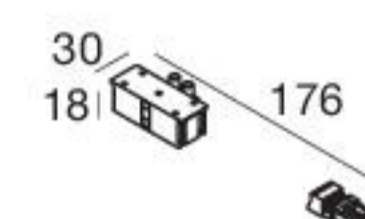

60127
Electrical connectors
3 poles



62180
Joints

The modules are complete with light source and power supply.