


Fylo+ Direct\_3 | Recessed linear light | 100-264 V | topLED 14,5 W 500 mA




 43 x 1005


Anod. Al. **63605**

2700 K	2020 lm	<b>M</b>
3000 K	2200 lm	<b>W</b>


General **00**

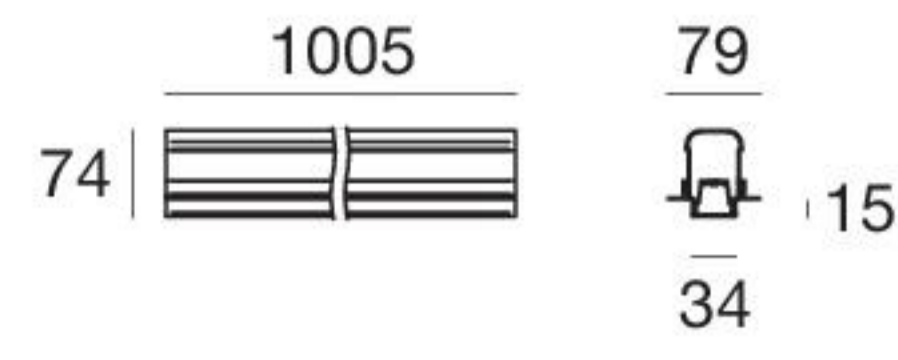


Accessories

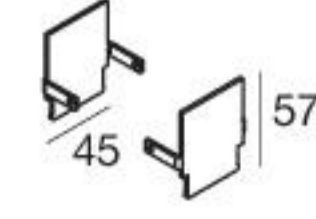

**63601**  
Sealing caps



**62180**  
Joints

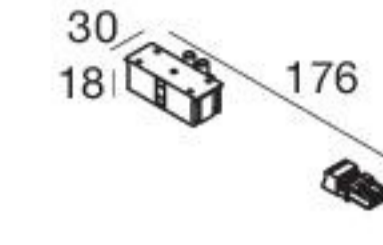


**60127**  
Electrical connectors  
3 poles

The modules are complete with light source, power supply and opaline profile.

Fylo+ Direct\_3 | Recessed linear light | 198-264 V | topLED 21,5 W 700 mA




 43 x 1505


Anod. Al. **63615**

2700 K	3030 lm	<b>M</b>
3000 K	3300 lm	<b>W</b>


General **00**

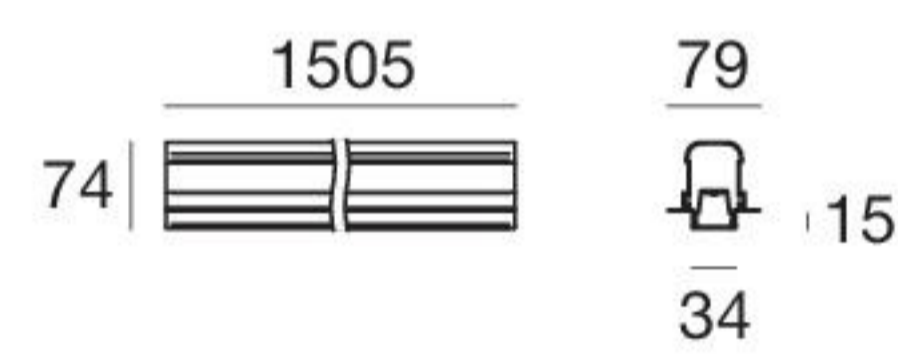


Accessories

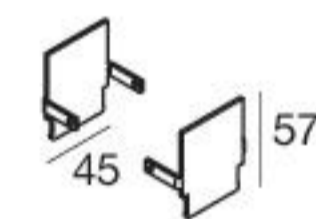

**63601**  
Sealing caps



**62180**  
Joints

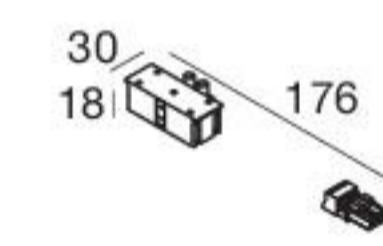

**60127**  
Electrical connectors  
3 poles

The modules are complete with light source, power supply and opaline profile.