



Fylo+ Direct_3 | Recessed linear light | 198-264 V | topLED 29 W 1050 mA

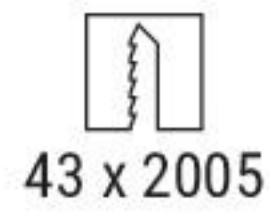


Anod. Al. **63625**

2700 K	4040 lm	M
3000 K	4400 lm	W


General **00**

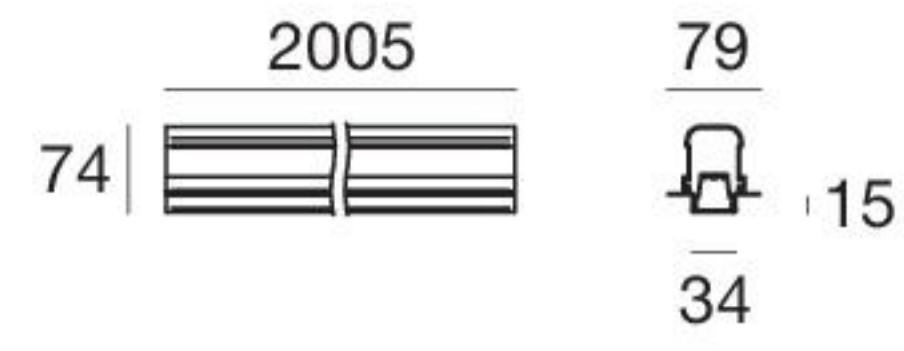


Accessories

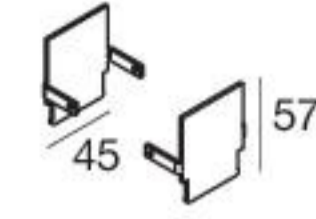

63601
Sealing caps




62180
Joints

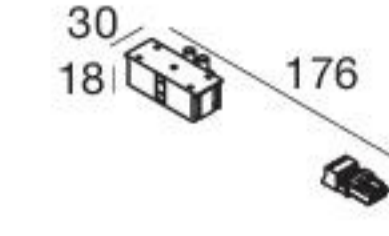

60127
Electrical connectors
3 poles

The modules are complete with light source, power supply and opaline profile.


Fylo+ Direct_3 left corner | Recessed linear light | 100-264 V | topLED 14,5 W 500 mA

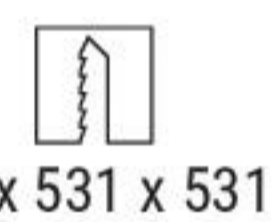


Anod. Al. **63645**

2700 K	2020 lm	M
3000 K	2200 lm	W

General **00**

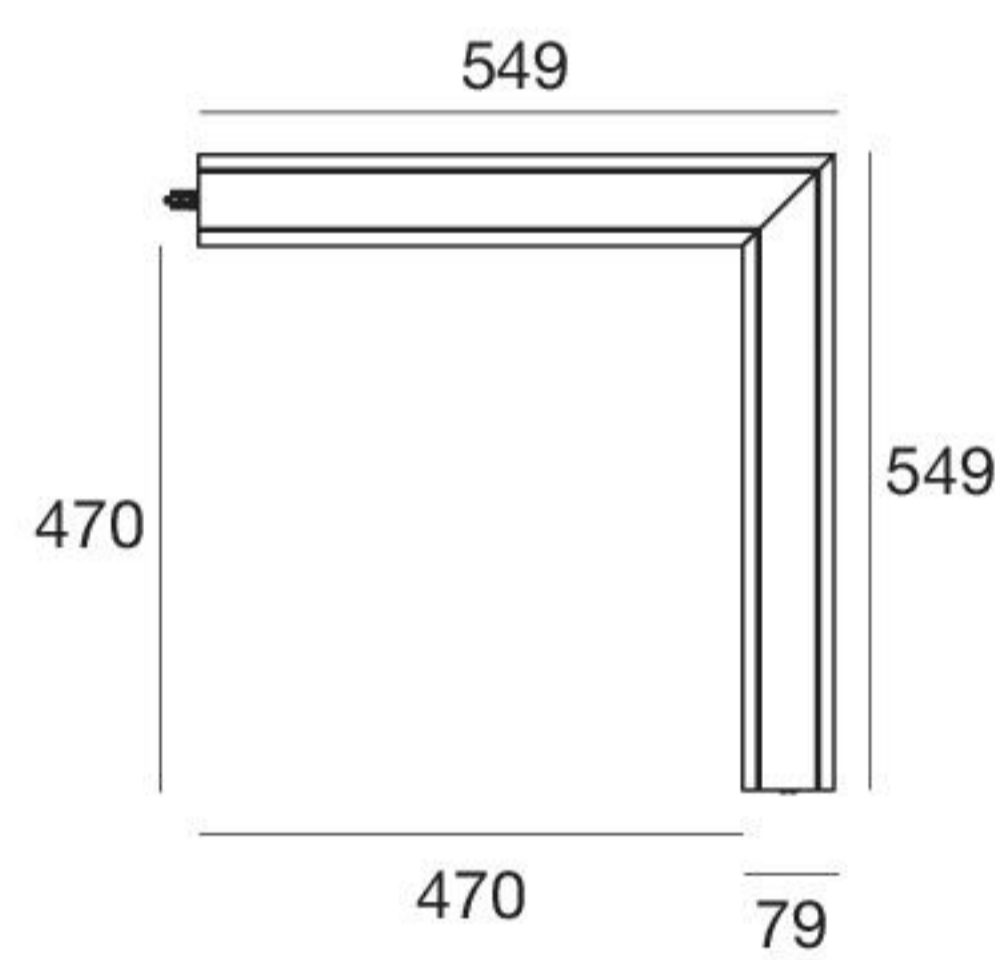


Accessories

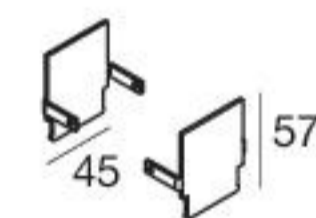

63601
Sealing caps



62180
Joints

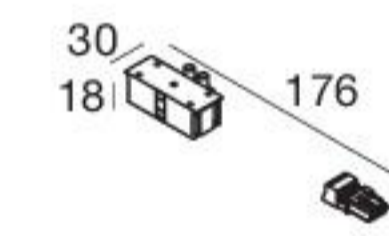

60127
Electrical connectors
3 poles

The modules are complete with light source, power supply and opaline profile.