


## Fylo+ Surface\_4 | Angolare light body

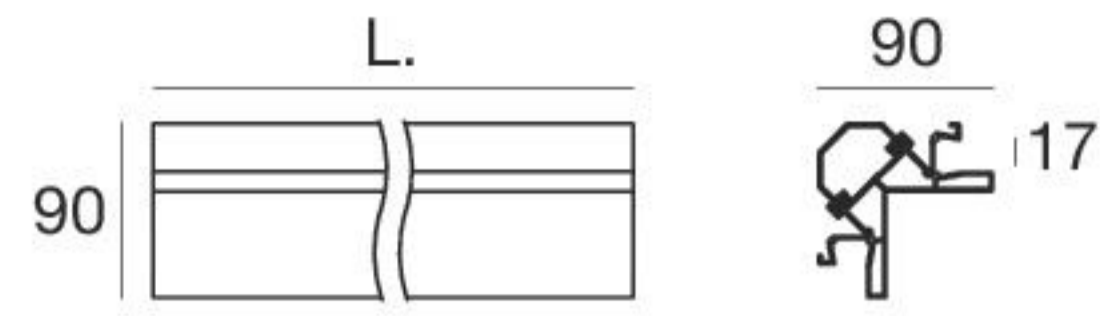

type	L mm	
White	1000	<b>65024</b>
White	2000	<b>65025</b>
White	custom	<b>65059*</b>

The modules must be completed with light source and power supply.

\* Selecting the "Custom" code allows ordering the desired profile length from a minimum of 1.1 m to a maximum of 1.9 m. For example, to request 1,3 m of Fylo+ it will be sufficient to order 1.3 x 65059.

**RTG 65024**  
**65025**

### Accessories

<b>65054</b> Opaline diffuser 1pc L 1 m	<b>65055</b> Opaline diffuser 5pc L 1 m	<b>62900</b> Outer casing for dropped ceiling	<b>65097</b> Sealing caps 2 pcs

## Fylo+ | Light units - Inflex | TopLED 7W



CRI80		colour	optics
Master+Slave	<b>65050W</b>	L 2x500 mm 3000 K	2x650 lm 2 pcs general
Master+Slave	<b>65050N</b>	L 2x500 mm 4000 K	2x650 lm 2 pcs general
Slave	<b>65051W</b>	L 10x500 mm 3000 K	10x650 lm 10 pcs general
Slave	<b>65051N</b>	L 10x500 mm 4000 K	10x650 lm 10 pcs general
Slave	<b>65052W</b>	L 2x500 mm 3000 K	2x650 lm 2 pcs general
Slave	<b>65052N</b>	L 2x500 mm 4000 K	2x650 lm 2 pcs general



LED bars section  
Should the total measurement be lesser that a multiple of 500 mm, using a hand saw the led bar can be cut into multiple pieces measuring 100 mm being keen to position the blade at the point indicated in the figure. An erroneous cutting will jeopardise the operation of the bar.

### Electronics

<b>99374</b> ON/OFF 1 - 10 art.	<b>99332</b> 0/1-10V 1 - 21 art.	<b>99722</b> DALI 1 - 17 art.

**RTG**

## Fylo+ | Light units - LED Strips



type	
<input type="checkbox"/>	941 Ribbon
<input type="checkbox"/>	943 Dropper

### Electronics

<b>99374</b> ON/OFF 75 W	<b>99332</b> 0/1-10V 150 W	<b>99722</b> DALI 120 W

**RTG**