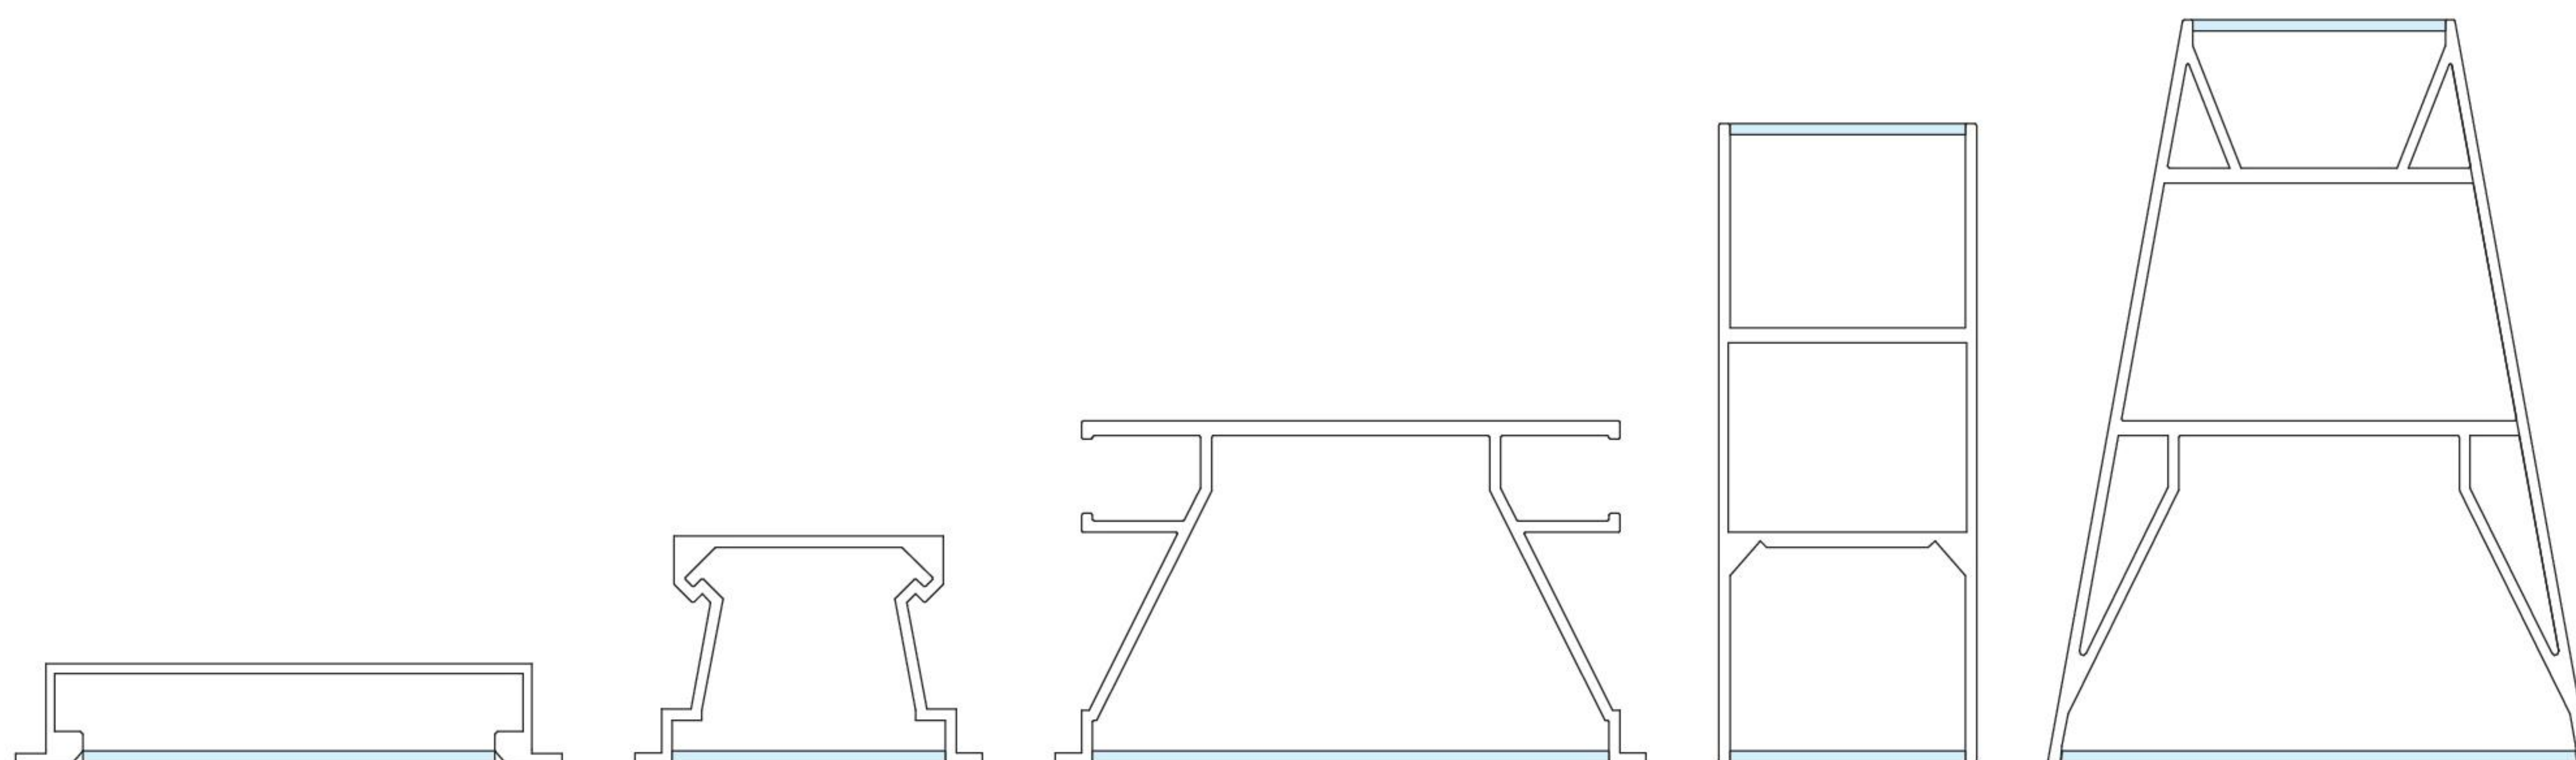














rollip range



	PRO  35 mm	35_C  35 mm	70_C  70 mm	35_S  35 mm	35_P  35 mm	7035_P  35 mm
500-595 mm	12 W	-	-	-	-	-
1002-1185 mm	24 W	20 W	20 W 40 W	20 W	20 W single 40 W double	20 W single 40 W double
1200-1216 mm stand-alone	24 W	22 W	22 W 46 W	-	48 W double	48 W double
1503-1505 mm	30 W	30 W	30 W 60 W	27 W	27 W single 54 W double	27 W single 54 W double
1516-1520 mm stand-alone	30 W	30 W	30 W 60 W	-	54 W double	54 W double
2004 mm	-	40 W	40 W 80 W	40 W	40 W single 80 W double	40 W single 80 W double
3006 mm	-	60 W	60 W 120 W	-	-	-
532 x 532 mm	-	20 W	-	20 W	20 W single 40 W double	-
551 x 551 mm	-	-	20 W 40 W	-	-	-
Finish						
CRI 80	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K	3000K 4000K
Optics	General Anti-glaring	General Asymmetric	General Asymmetric Anti-glaring	General	General	General Anti-glaring
Electronics	On/Off DALI 1-10V	On/Off DALI 1-10V	On/Off DALI 1-10V	On/Off DALI	On/Off DALI	On/Off DALI