
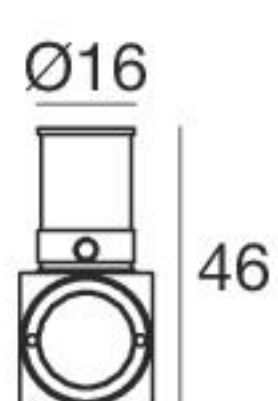


Ilamt | Wall light | powerLED 1 W 350 mA

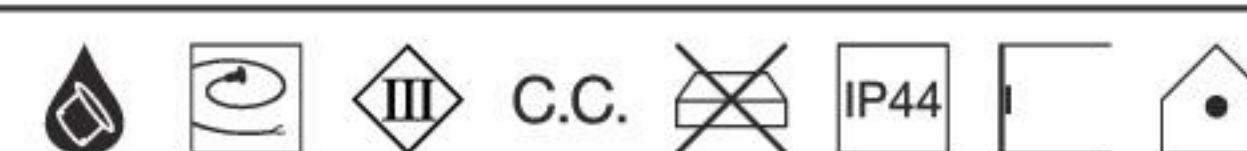


Efficiency - CRI 80


Color	Article No.	2700 K	3000 K	4000 K	lm	Beam	Spot	Beam Spread
White	<b>93986</b>	2700 K	3000 K	4000 K	136 lm	M	Spot	<b>15</b>
Nickel	<b>93988</b>	3000 K	4000 K		145 lm	W	Medium Flood	<b>30</b>
					155 lm	N	Flood	<b>60</b>

Electronics

**89144** ON/OFF 1 - 2 art.  
**99708** 0/1-10V converter 1 - 4 art. + driver CV 24V 981  
**99711** DALI converter 1 - 4 art. + driver CV 24V 981

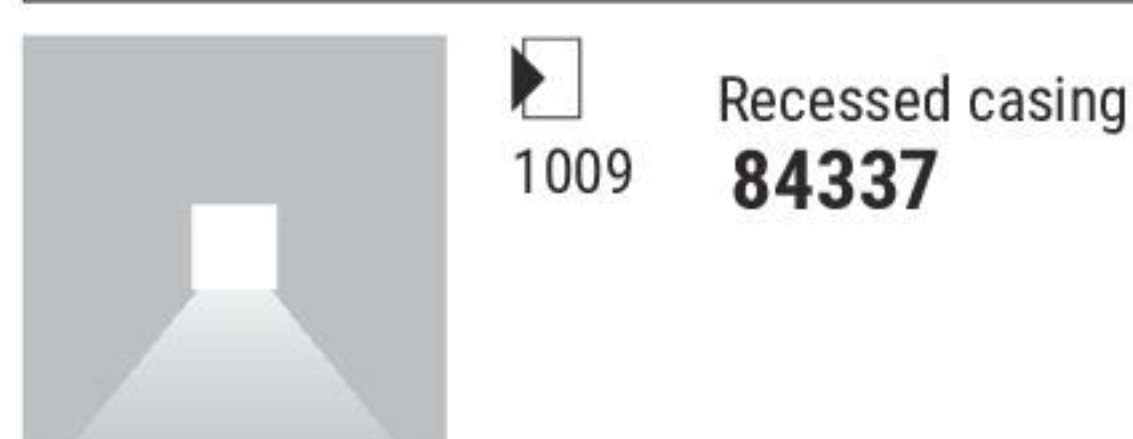

Ilamt | Wall light | powerLED 2 W 630 mA

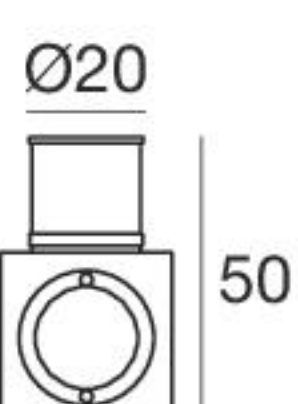


Efficiency - CRI 80


Color	Article No.	2700 K	3000 K	4000 K	lm	Beam	Spot	Beam Spread
White	<b>93566</b>	2700 K	3000 K	4000 K	219 lm	M	Spot	<b>10</b>
Nickel	<b>86679</b>	3000 K	4000 K		233 lm	W	Medium Flood	<b>30</b>
					249 lm	N	Flood	<b>50</b>

Electronics

**89147** ON/OFF 1 - 2 art.  
**99710** 0/1-10V converter 1 art. + driver CV 24V 981  
**99713** DALI converter 1 art. + driver CV 24V 981

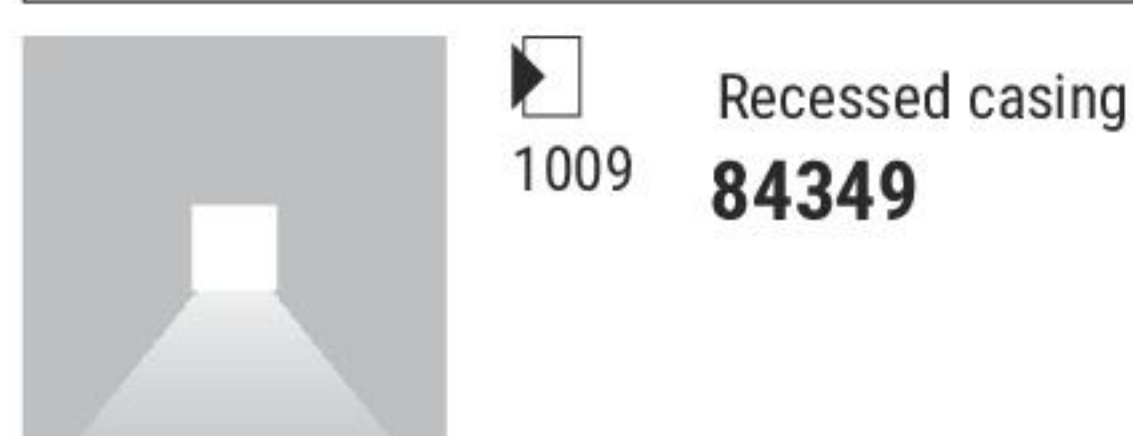

Ilamt66 | Wall light | powerLED 2 W 630 mA

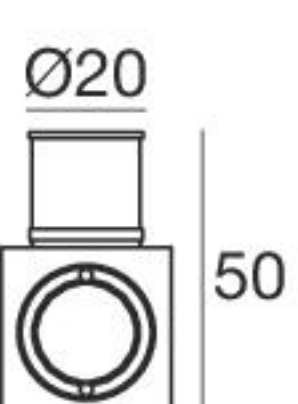

Efficiency - CRI 80

Color	Article No.	2700 K	3000 K	4000 K	lm	Beam	Spot	Beam Spread
White	<b>97086</b>	2700 K	3000 K	4000 K	219 lm	M	Narrow Spot	<b>08</b>
Nickel	<b>97088</b>	3000 K	4000 K		233 lm	W	Spot	<b>15</b>
					249 lm	N	Medium Flood	<b>30</b>
							Flood	<b>60</b>

Electronics

**89420** ON/OFF 1 - 2 art.  
**99179** ON/OFF 3 - 6 art.  
**99186** ON/OFF 6 - 12 art.



Recessed casing 1009 **84349**