












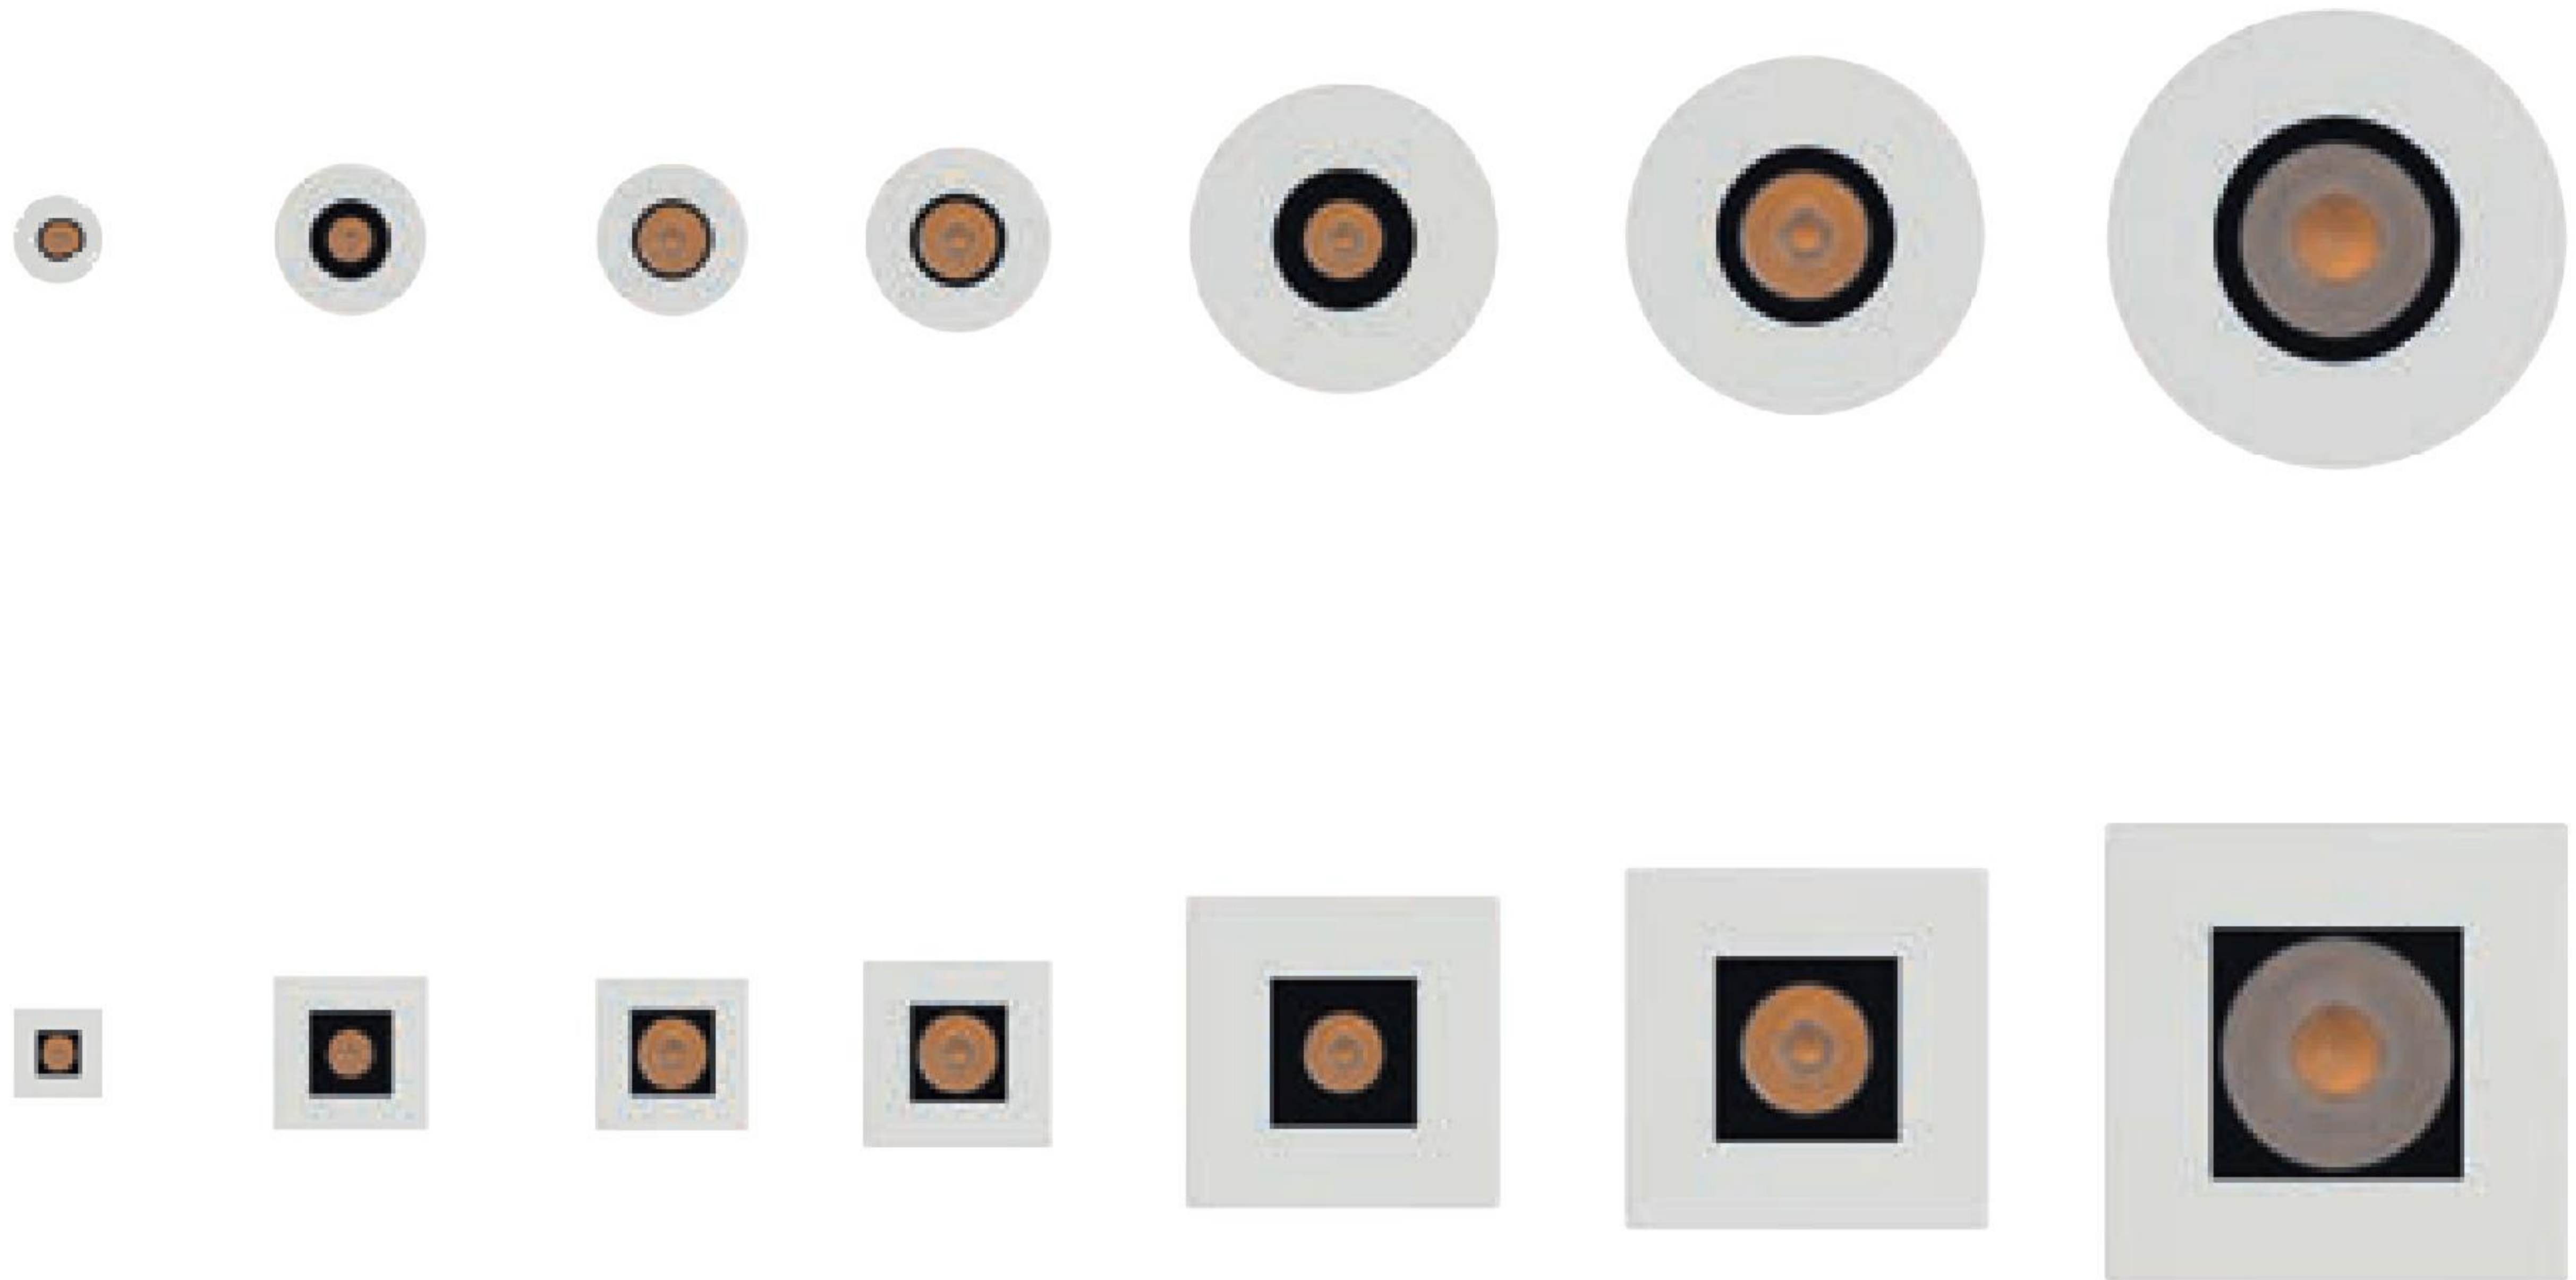







vos range



	1,5 W	2 W	4 W	6 W	8 W	15 W	25 W
_R 	Ø 20 mm	Ø 35 mm	Ø 35 mm	Ø 42 mm	Ø 71 mm	Ø 105 mm	Ø 135 mm
_RJ 	-	-	Ø 60 mm	-	Ø 75 mm	Ø 100 mm	-
_Q 	□ 20 mm	□ 35 mm	□ 35 mm	□ 42 mm	□ 71 mm	□ 105 mm	□ 135 mm
_QJ 	-	-	□ 60 mm	-	□ 75 mm	□ 100 mm	-
Accessories	-						
Finish							
Balance CRI 92	2700K 3000K	2700K 3000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Efficiency CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optics	Medium Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood	Spot Medium Flood Flood
Driver	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI	On/Off 1-10 V DALI
	15 mm	29 mm	29 mm 54 mm (J)	35 mm	64 mm 70 mm (J)	95 mm	121 mm