



Guardian | Downlight | 190-250 V | powerLED 7,2 W DC - 8 W AC

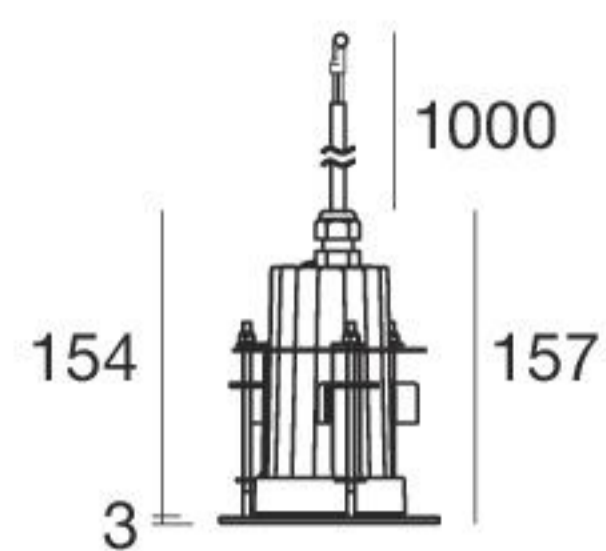


Balance - CRI 80

White	81893	2700 K	709 lm	M	Spot	15	
Black	81916	3000 K	760 lm	W	Medium Flood	30	
Grey	81838	4000 K	821 lm	N	Flood	60	
						Asymmetric	07

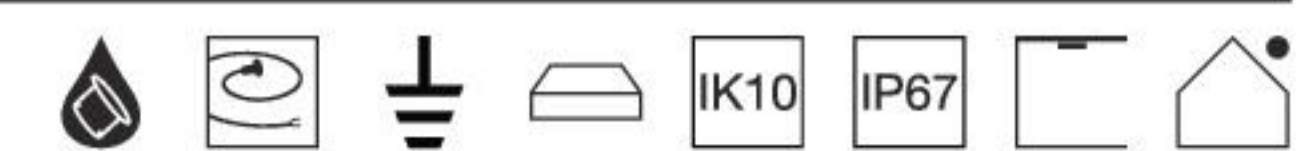

Balance - CRI 80

White	81894	2700 K	709 lm	M	Spot	15
Black	81917	3000 K	760 lm	W	Medium Flood	30
Grey	81839	4000 K	821 lm	N	Flood	60

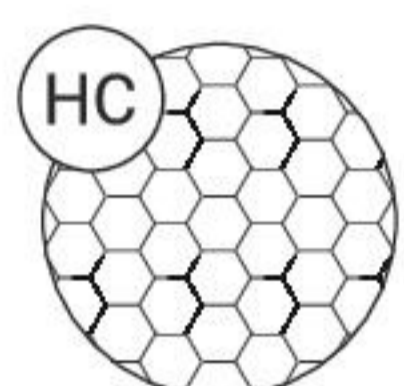



Recessed casing



99673


Outer casing for brick or concrete-mounted installation

Guardian_J | Downlight | 190-250 V | powerLED 7,2 W DC - 8 W AC

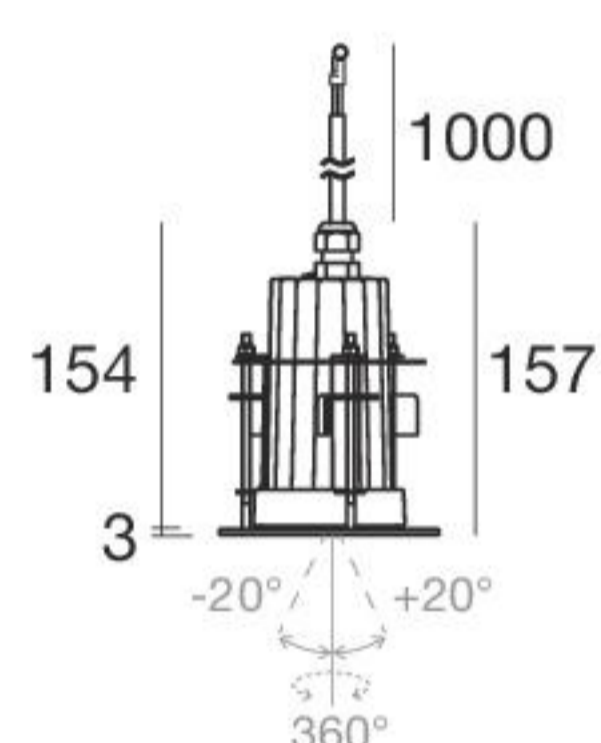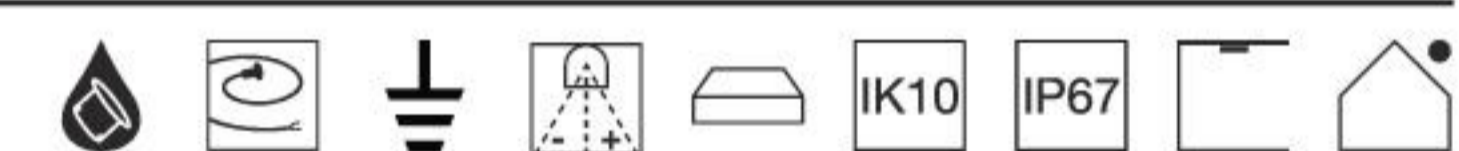

Balance - CRI 80

White	81895	2700 K	709 lm	M	Spot	20
Black	81918	3000 K	760 lm	W	Medium Flood	30
Grey	81840	4000 K	821 lm	N	Flood	60




Recessed casing




99673

Outer casing for brick or concrete-mounted installation


81909W07

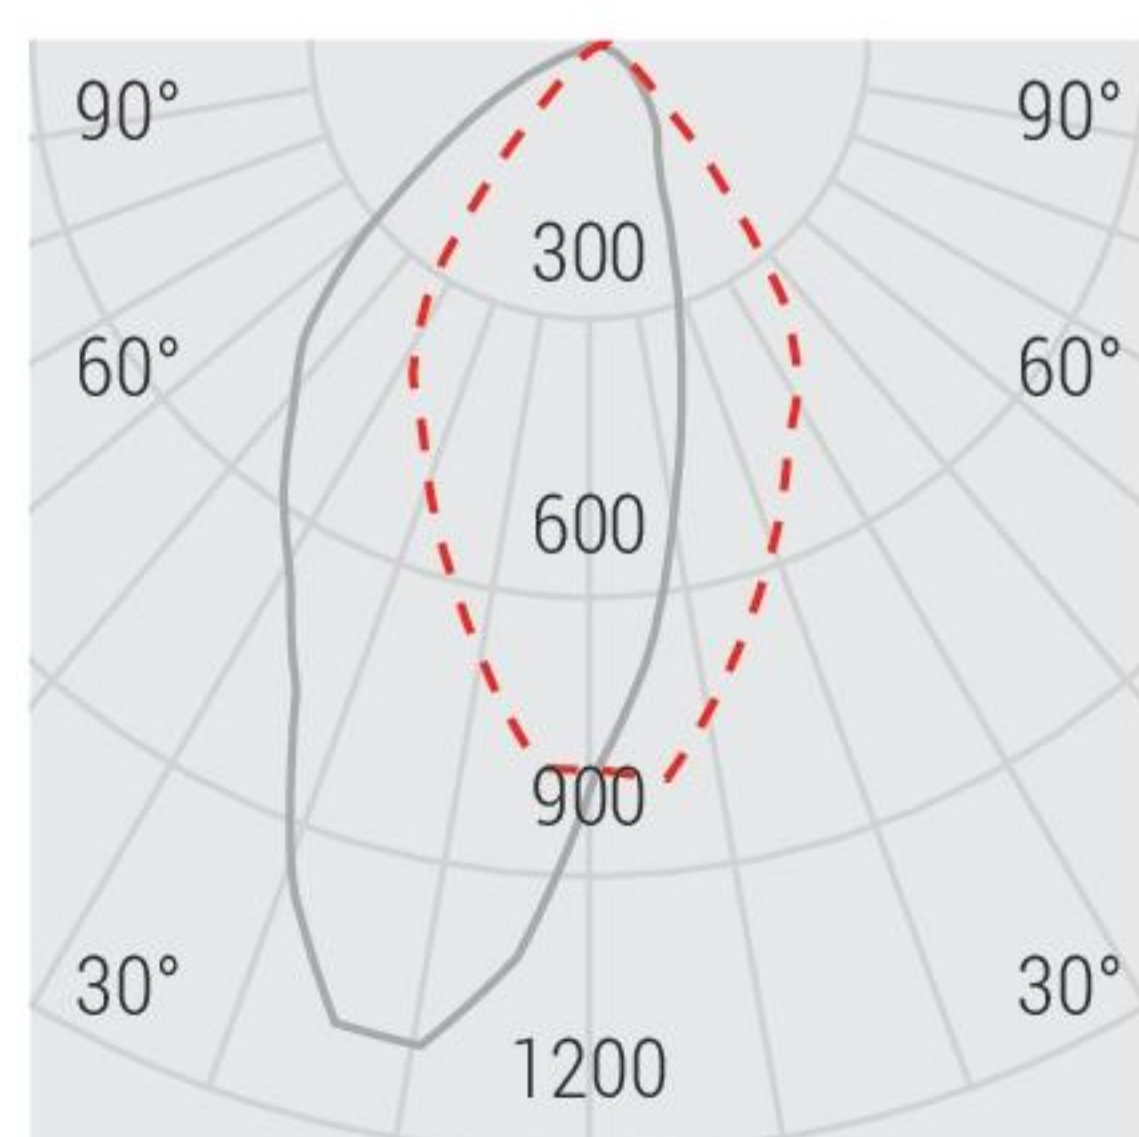


Photometric curve

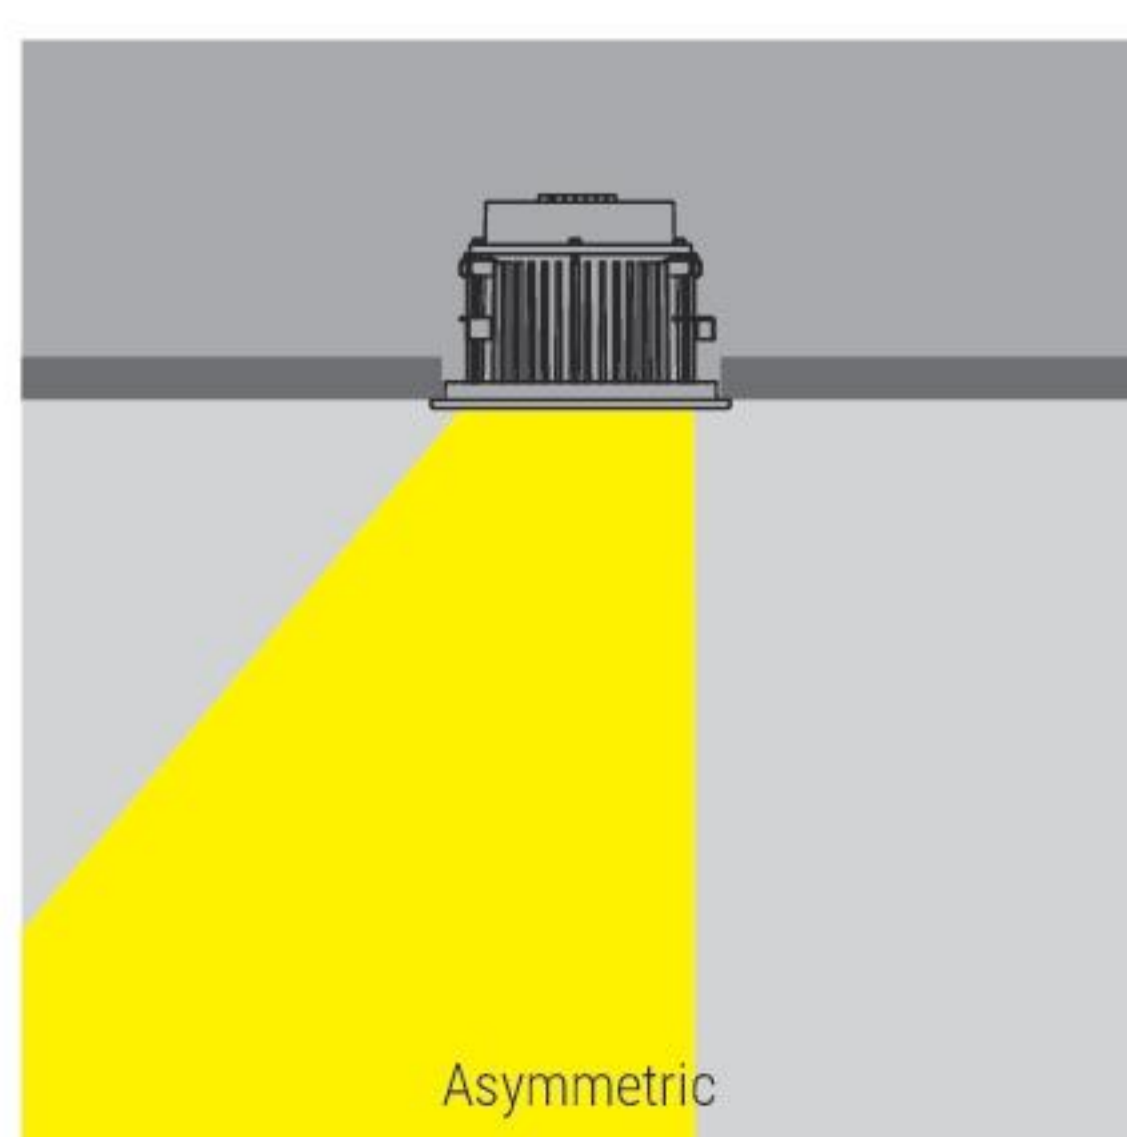

Light beam

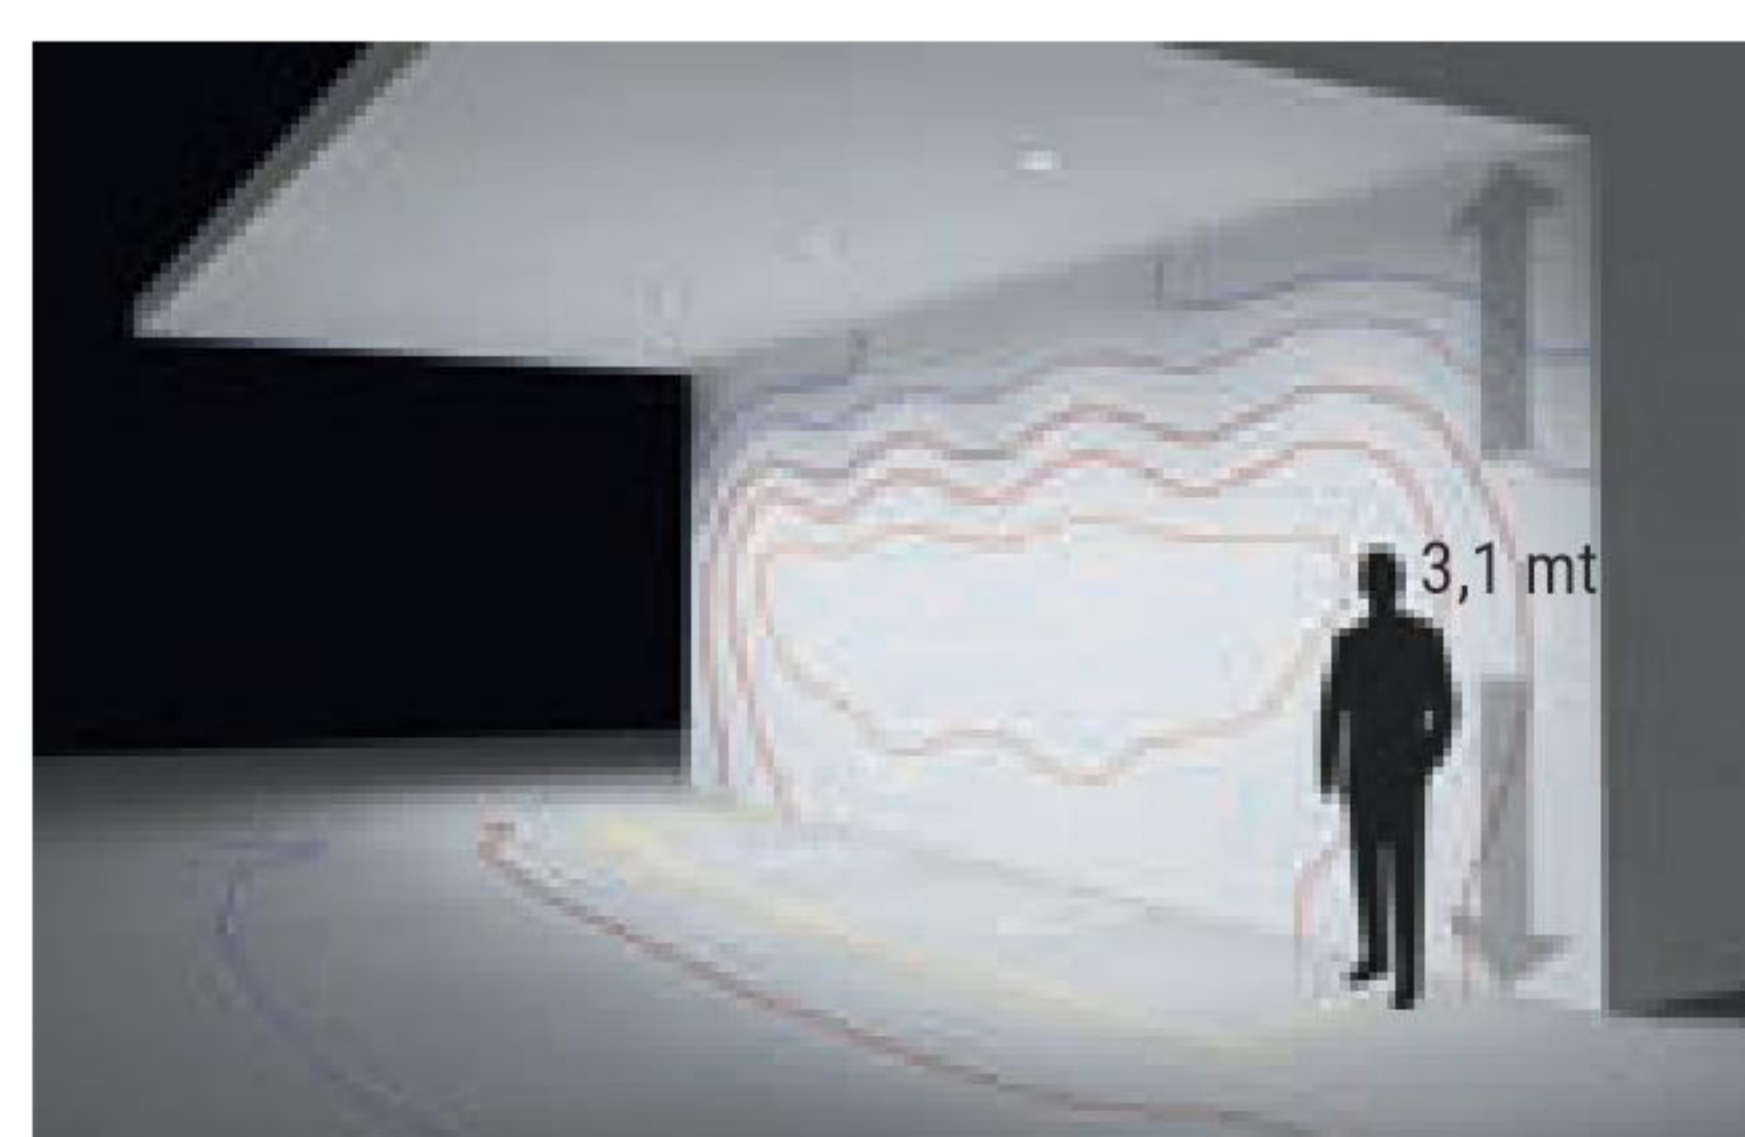

25 LUX 50 LUX 100 LUX 150 LUX 200 LUX 250 LUX 300 LUX 400 LUX

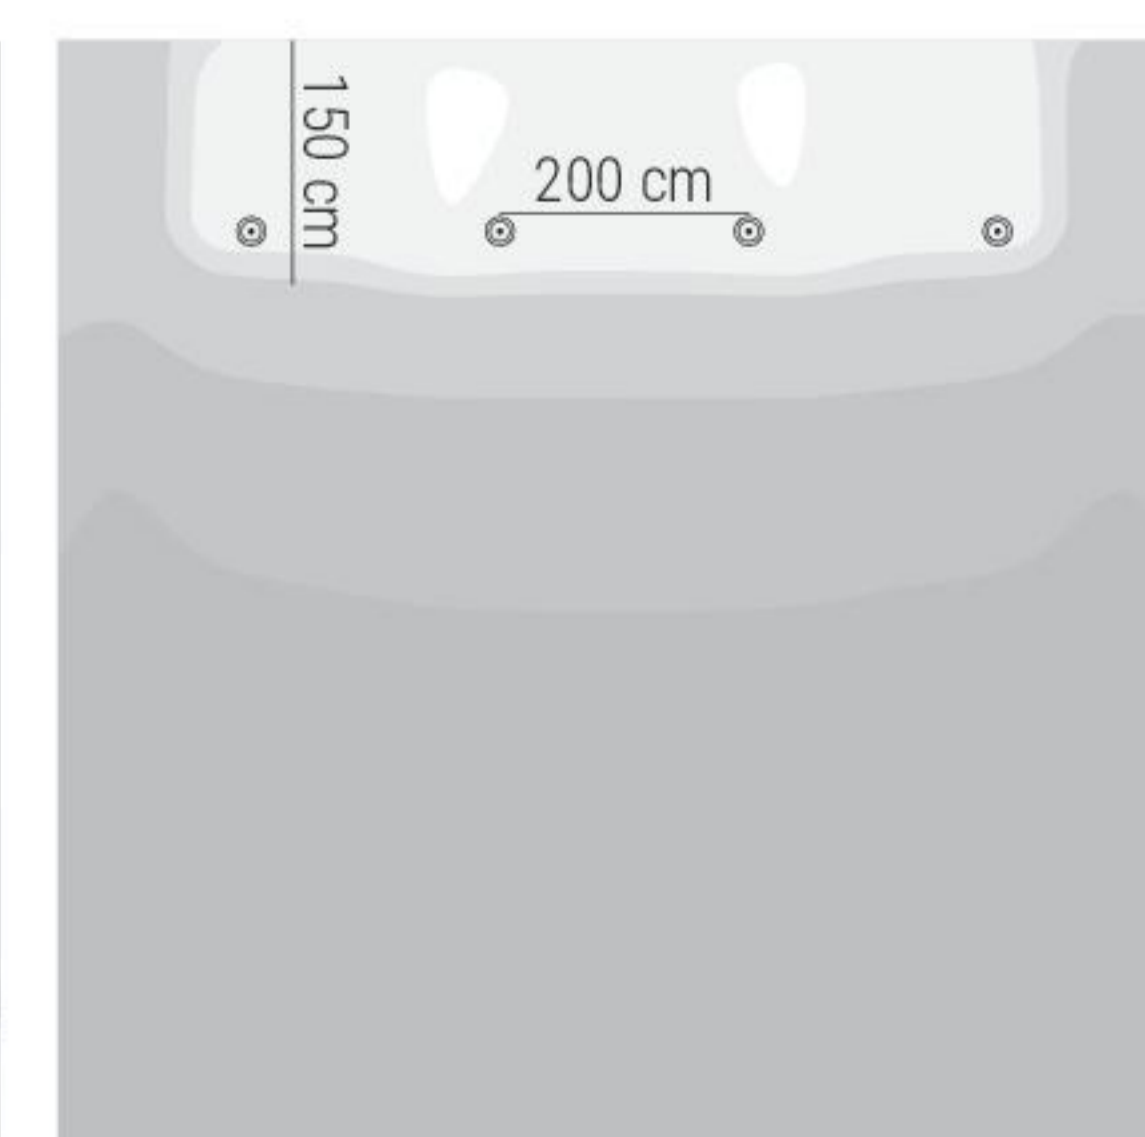

Floor plan