
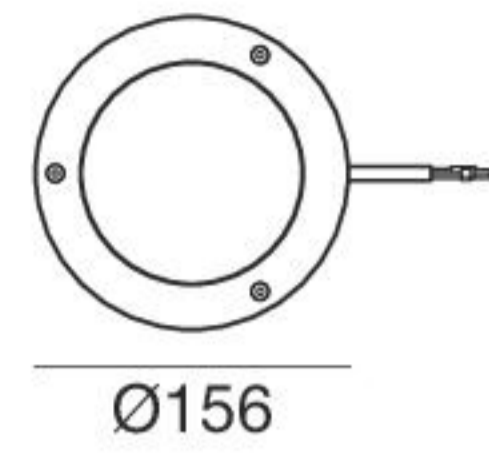
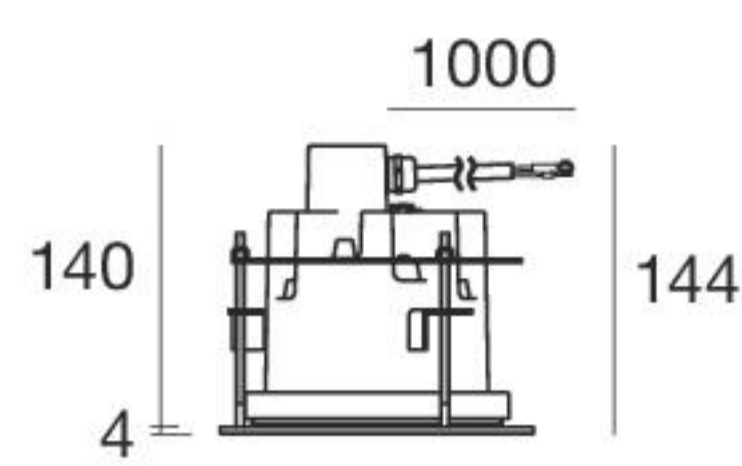


Guardian | Downlight | 180-300 V | powerLED 12,6 W DC - 14,1 W AC

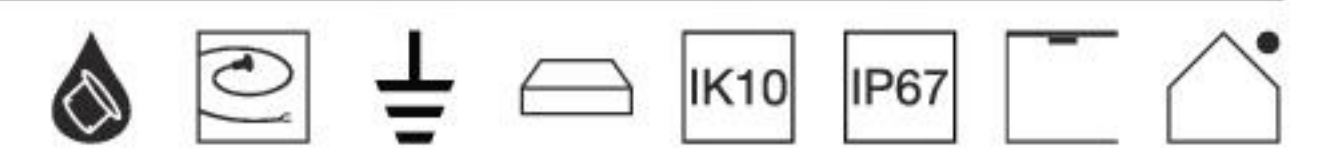

Balance - CRI 80

White	81896	2700 K	1724 lm	M	Spot *	15
Black	81919	3000 K	1724 lm	W	Medium Flood	30
Grey	81841	4000 K	1854 lm	N	Flood	60


Balance - CRI 80



White	81897	2700 K	1724 lm	M	Spot **	15
Black	81920	3000 K	1724 lm	W	Medium Flood	30
Grey	81842	4000 K	1854 lm	N	Flood	60

Balance - CRI 80

White	81899	2700 K	1683 lm	M	Asymmetric	07
Black	81922	3000 K	1808 lm	W		
Grey	81844	4000 K	1949 lm	N		

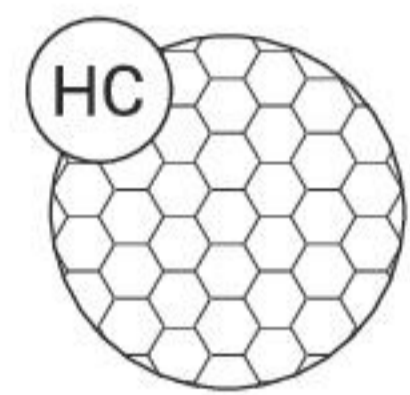



Recessed casing



99674

Outer casing for brick or concrete-mounted installation

Guardian DALI | Downlight | 180-300 V | powerLED 12,6 W DC - 14,1 W AC

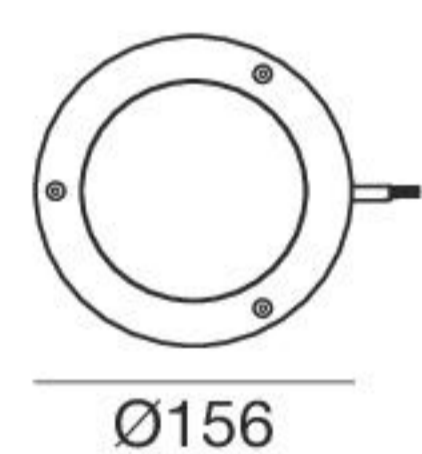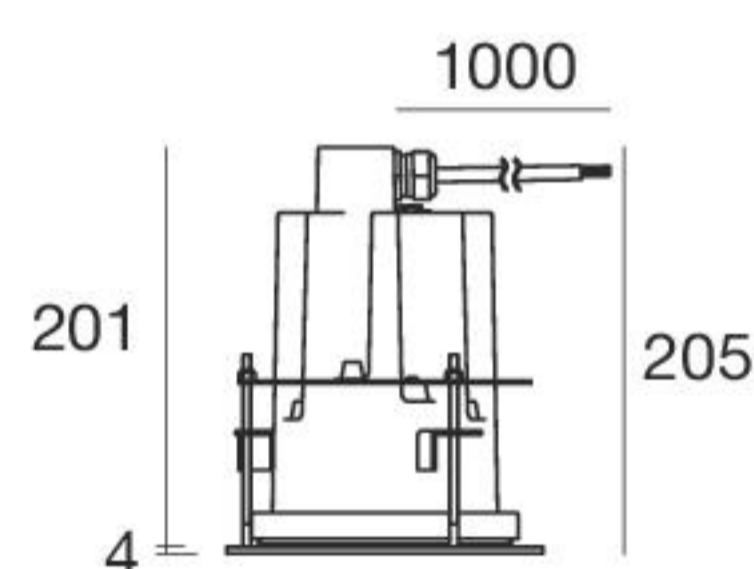

Balance - CRI 80

White	81900	2700 K	1724 lm	M	Spot	15
Black	81923	3000 K	1724 lm	W	Medium Flood	30
Grey	81845	4000 K	1854 lm	N	Flood	60


Balance - CRI 80




White	81901	2700 K	1724 lm	M	Spot	15
Black	81924	3000 K	1724 lm	W	Medium Flood	30
Grey	81846	4000 K	1854 lm	N	Flood	60

Balance - CRI 80

White	81903	2700 K	1683 lm	M	Asymmetric	07
Black	81926	3000 K	1808 lm	W		
Grey	81848	4000 K	1949 lm	N		

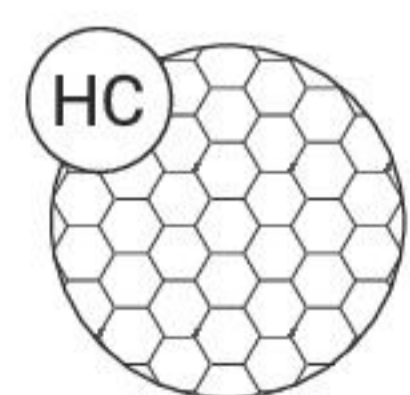

Recessed casing

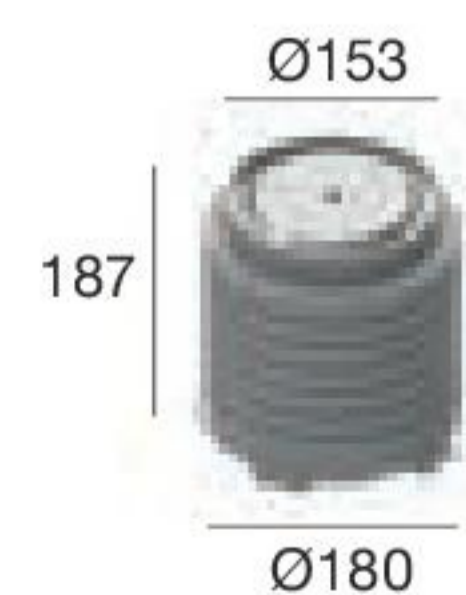

99674

Outer casing for brick or concrete-mounted installation