



Envelope_W Wall-Recessed | Path-marker | 24 V | topLED 7 W

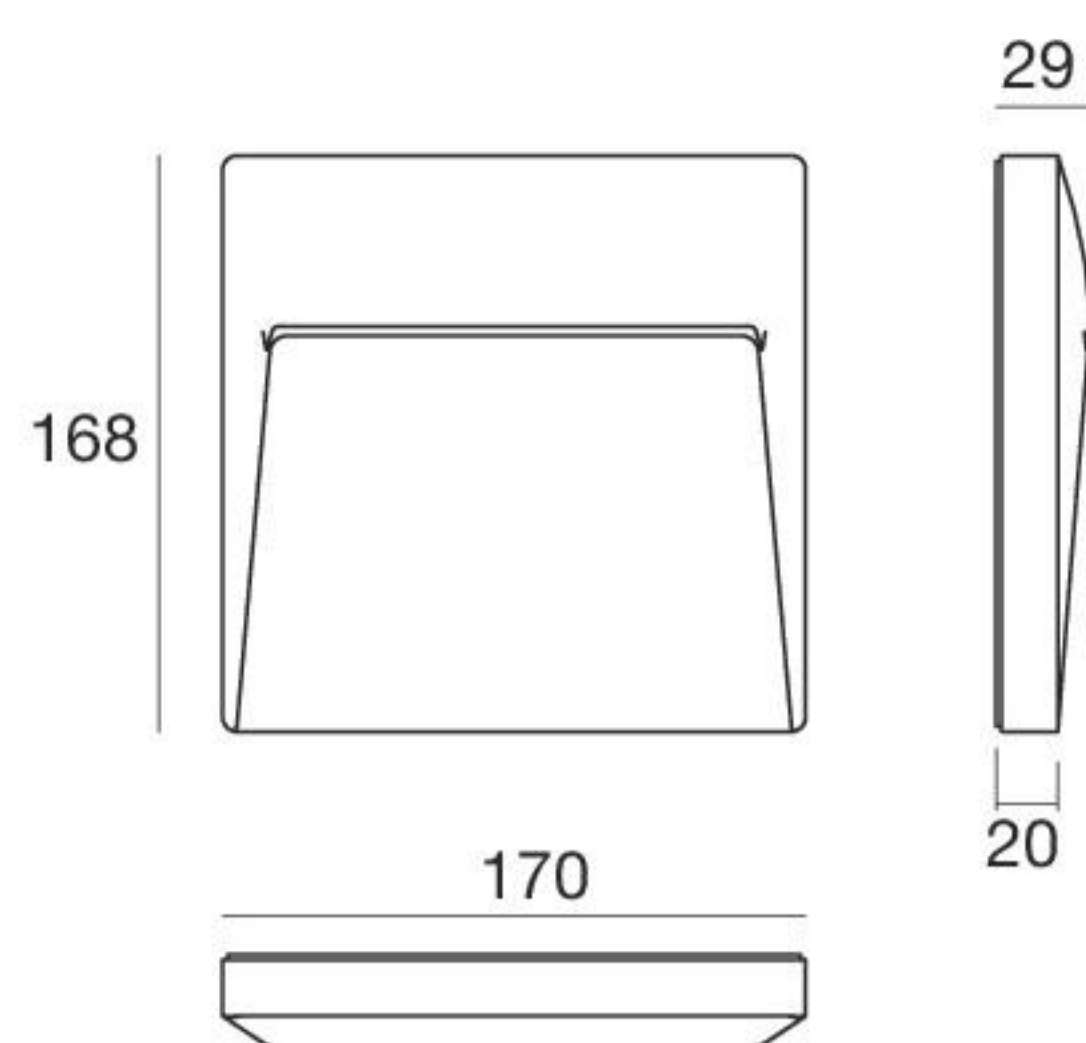

CRI 80


White	81343	3000 K	619 lm	W	Asymmetric	07
Grey	81291	4000 K	643 lm	N		
BK Grey	81290					
Cor-Ten	81292					

Recessed casing

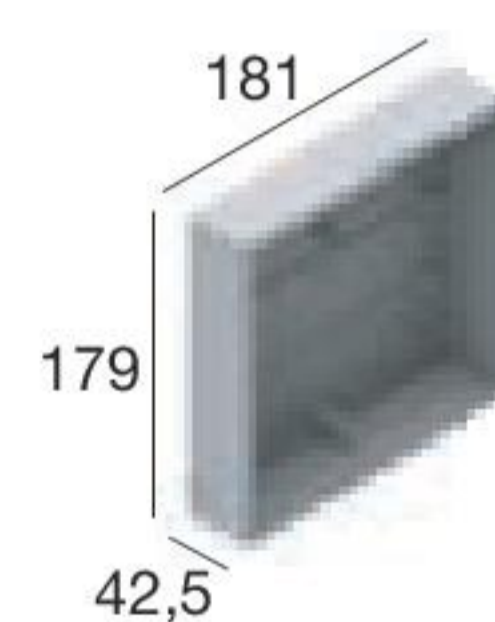

99744
Outer casing for
brickwork-mounted
installation

Envelope_W Wall-Recessed | Path-marker | 24 V | topLED

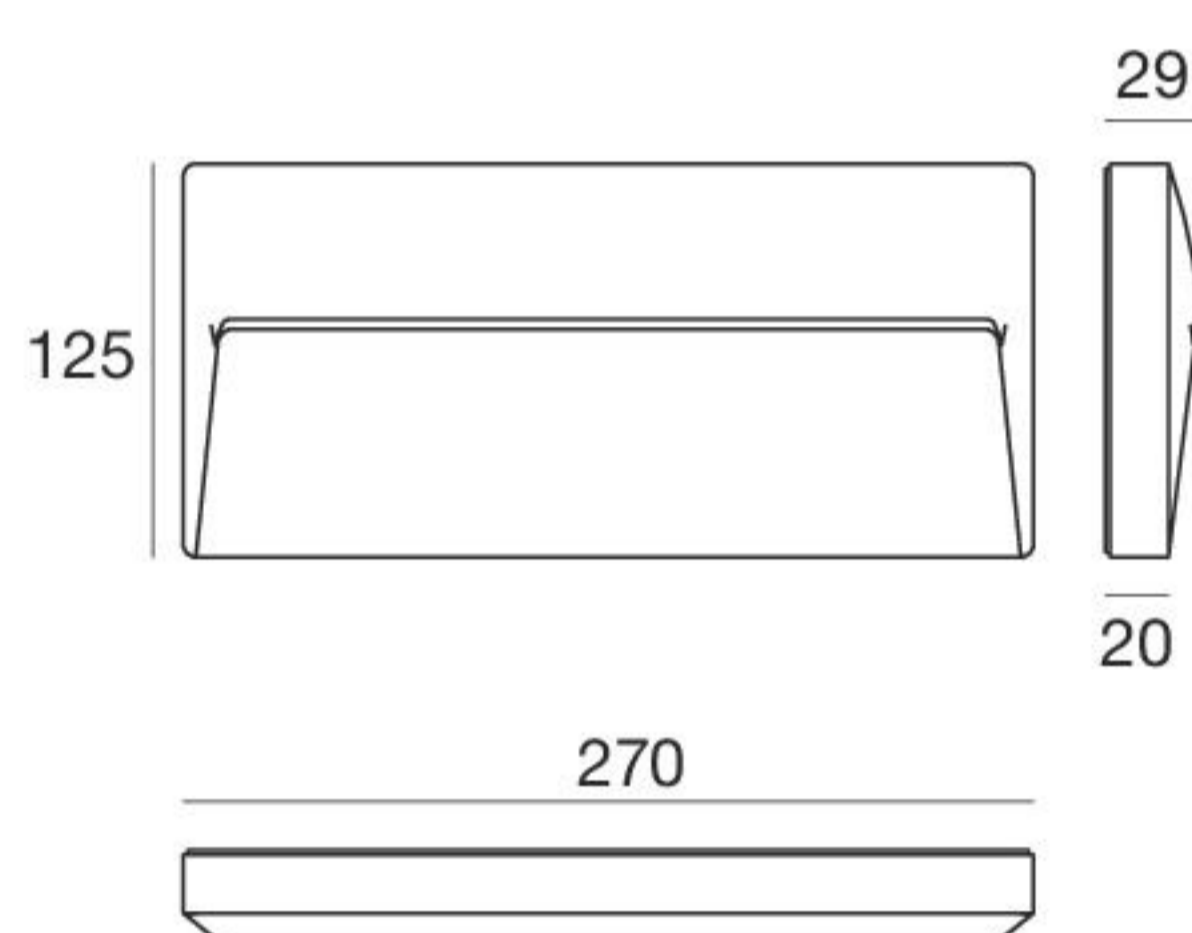


CRI 80 - 11 W

White	81344	3000 K	1032 lm	W	Asymmetric	07
Grey	81294	4000 K	1073 lm	N		
BK Grey	81293					
Cor-Ten	81295					

CRI 80 - 17 W

White	81512	3000 K	1600 lm	W	Asymmetric	07
Grey	81510	4000 K	1684 lm	N		
BK Grey	81509					
Cor-Ten	81511					

Recessed casing

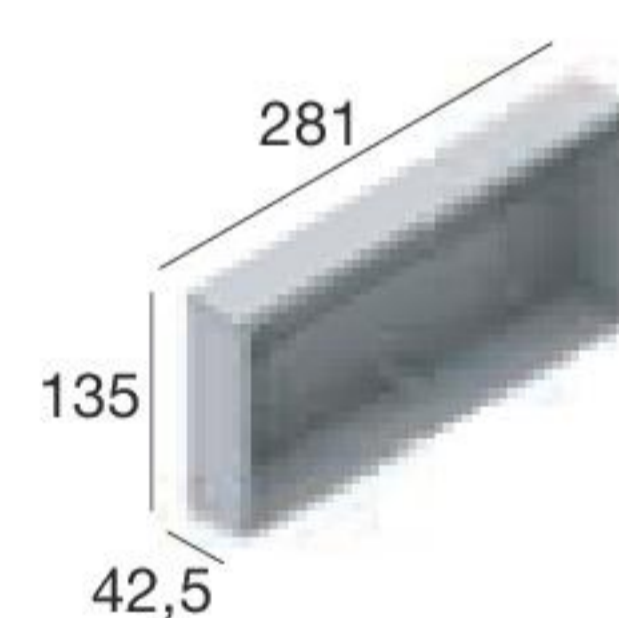

99745
Outer casing for
brickwork-mounted
installation

Solution with outer casing

